


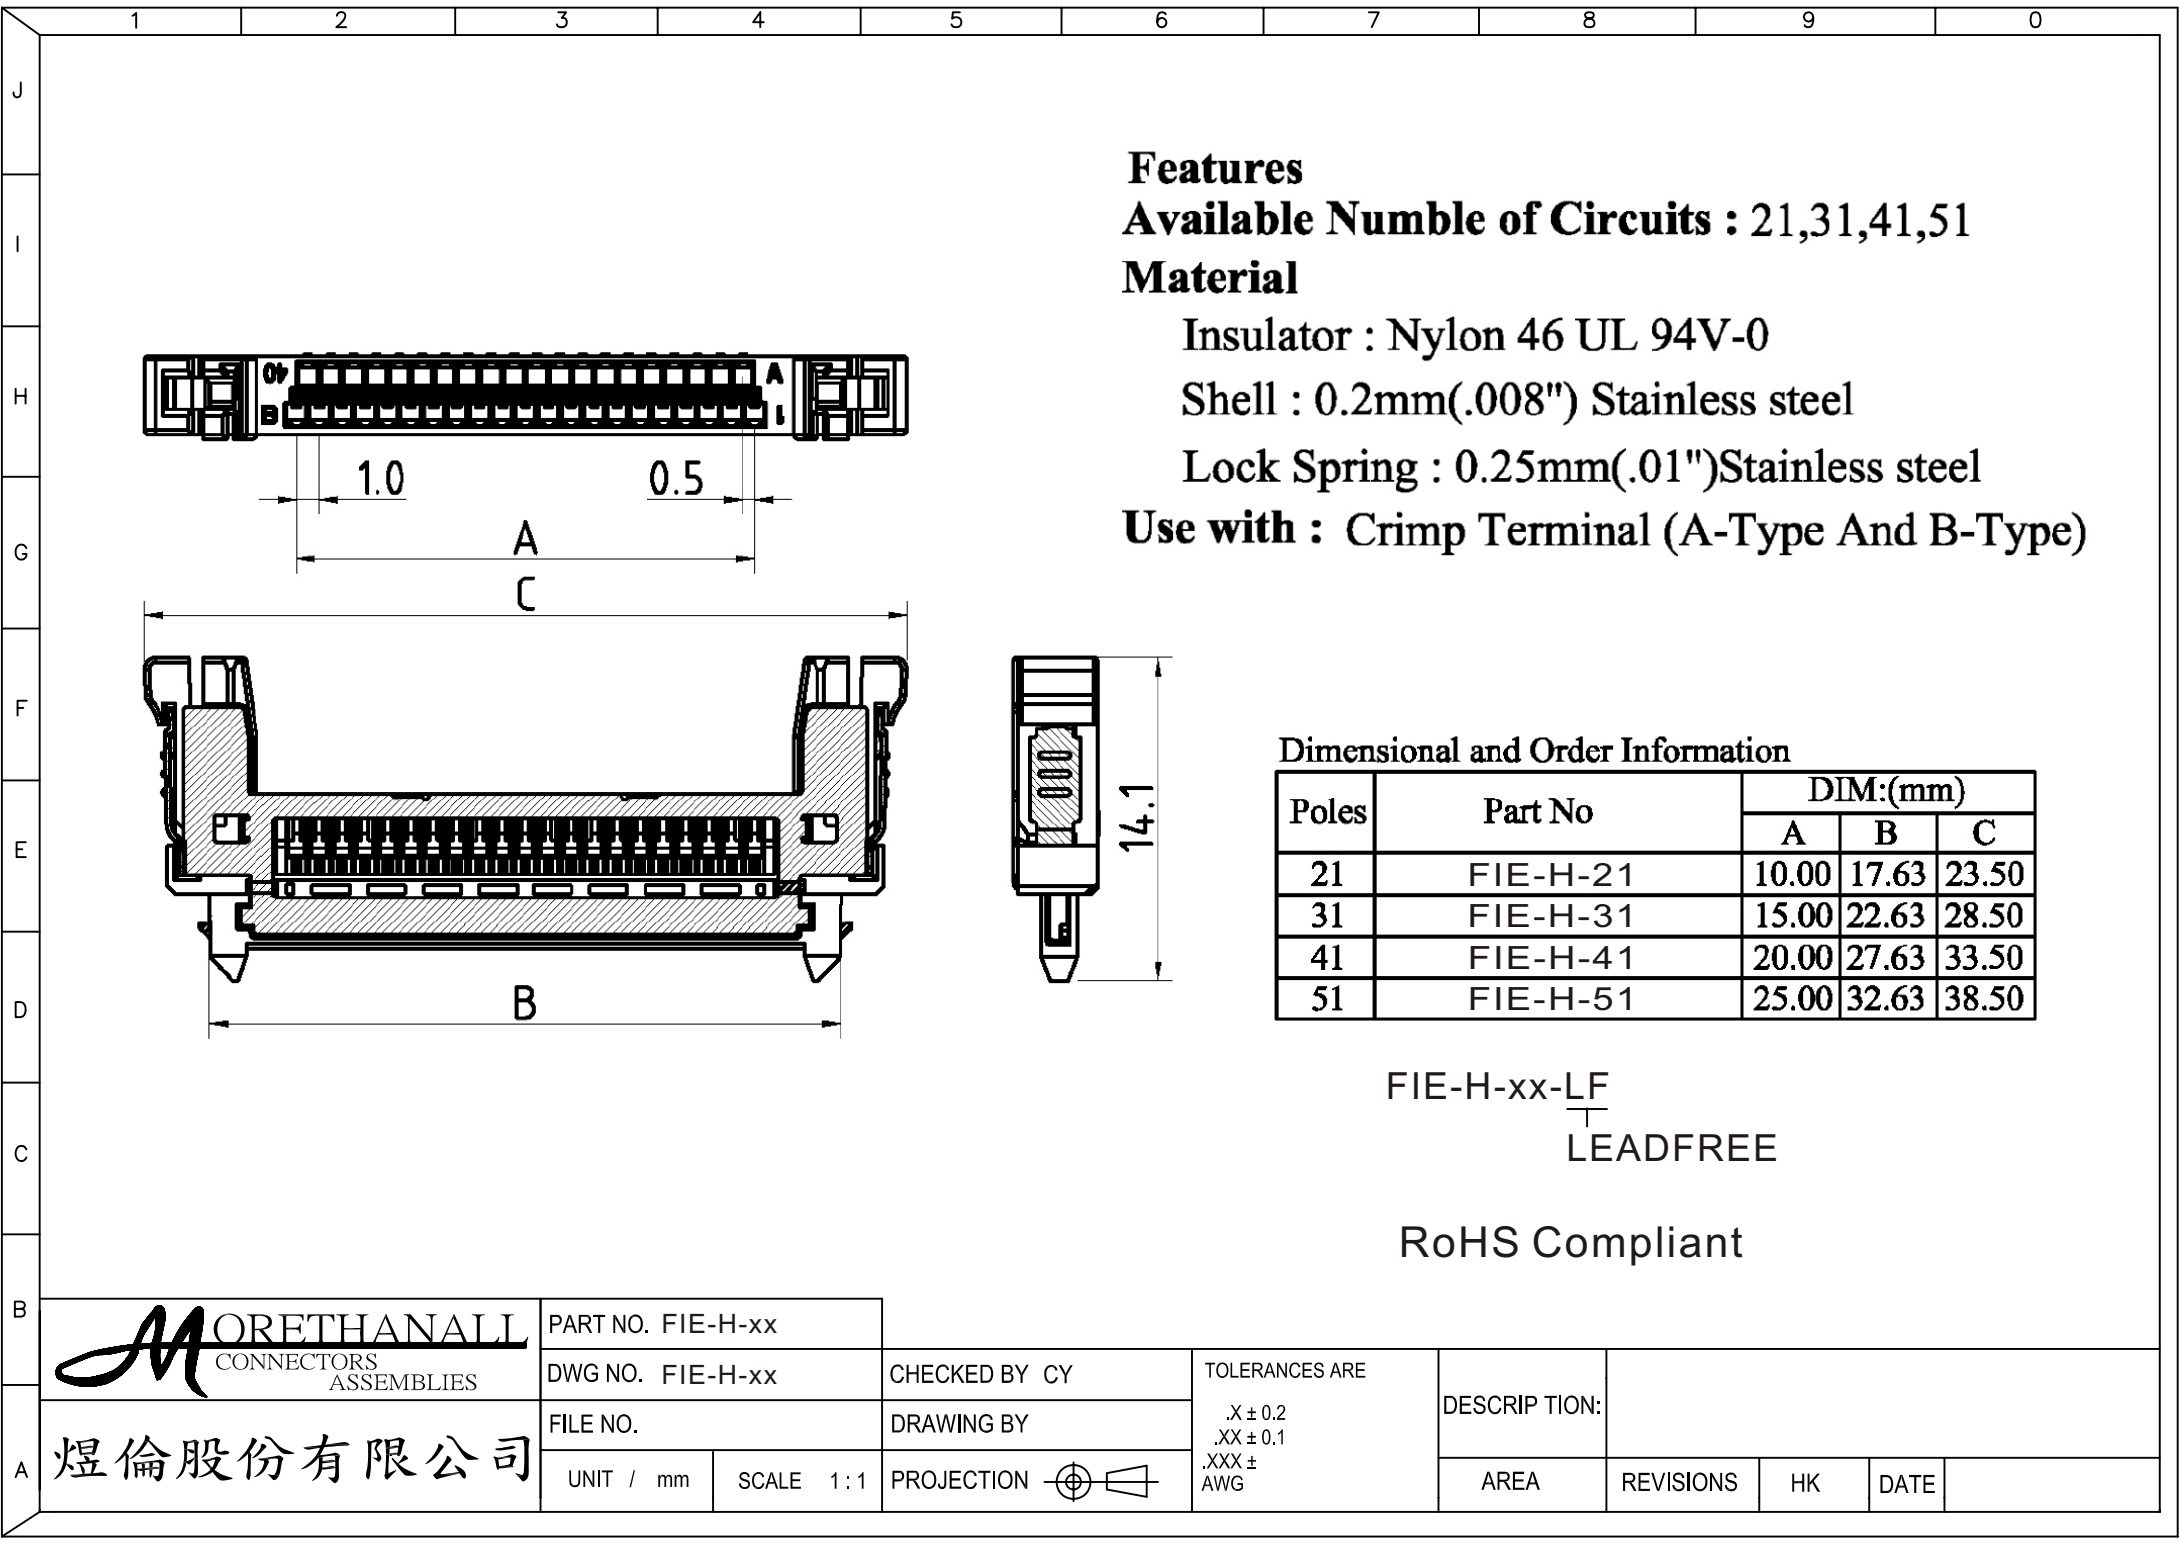

Features

Available Numble of Circuits : 21,31,41,51

Material

Insulator : Nylon 46 UL 94V-0

Shell : 0.2mm(.008") Stainless steel

Lock Spring : 0.25mm(.01")Stainless steel

Use with : Crimp Terminal (A-Type And B-Type)

Dimensional and Order Information

Poles	Part No	DIM:(mm)		
		A	B	C
21	FIE-H-21	10.00	17.63	23.50
31	FIE-H-31	15.00	22.63	28.50
41	FIE-H-41	20.00	27.63	33.50
51	FIE-H-51	25.00	32.63	38.50

FIE-H-xx-LF
LEADFREE

RoHS Compliant



煜倫股份有限公司

PART NO. FIE-H-xx								
DWG NO. FIE-H-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:				
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE	