

Features

Available Numble of Circuits : 21,31,41,51

Material

Insulator : Nylon 9T UL 94V-0 Black




Contact : 0.15mm(.006")Flat Pin,Phosphor Bronze,Gold-flash

Shell : 0.2mm(.008") Phosphor bronz, Tin Plated

FIE-W-xx-LF

LEADFREE

RoHS Compliant

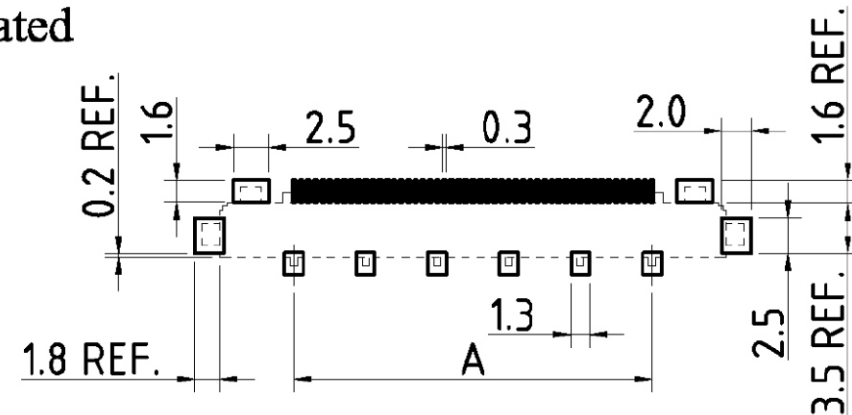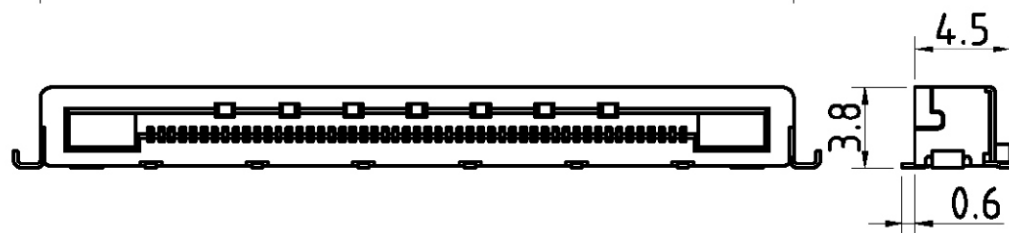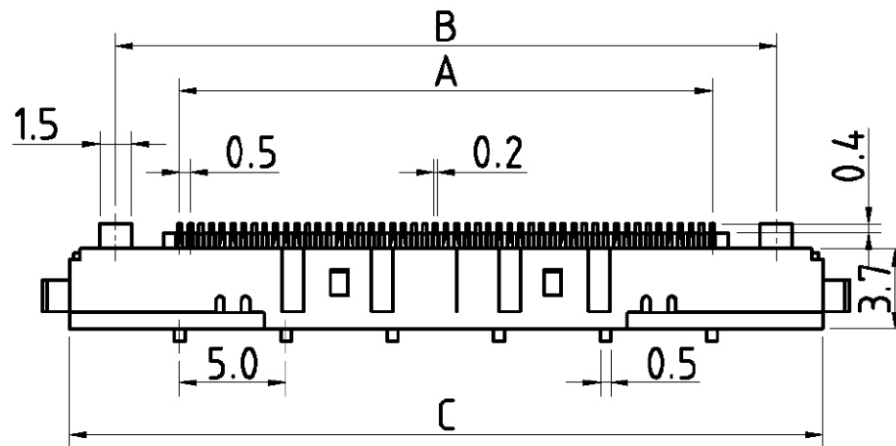

P.C.B LAYOUT

Dimensional and Order Information

Poles	Part No	DIM:(mm)		
		A	B	C
21	FIE-W-21	10.0	16.0	20.4
31	FIE-W-31	15.0	21.0	25.4
41	FIE-W-41	20.0	26.0	30.4
51	FIE-W-51	25.0	31.0	35.4

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FIE-W-xx

DWG NO. FIE-W-xx

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ± 0.1

.XXX ±

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司