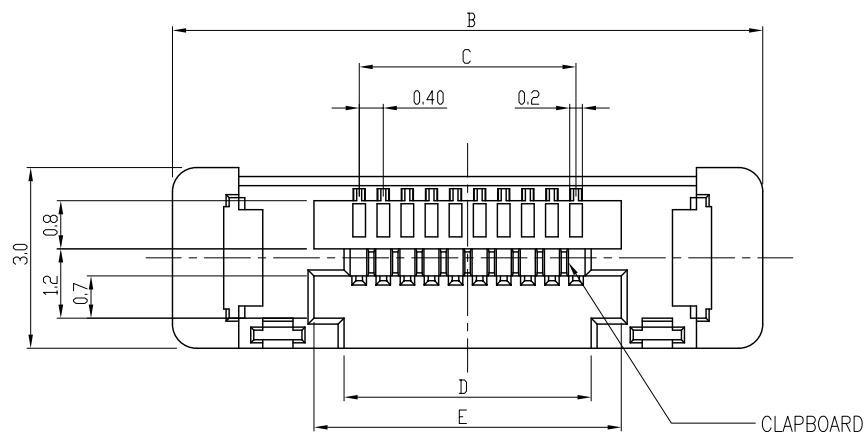
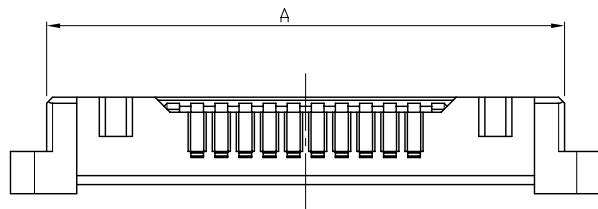


NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0.
COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY.
2. FINISH:
 - 2.1 CONTACT:
 - ALL UNDERPLATED 50u"~100u" DUCTILE NICKEL
 - A.3u" GOLD ON CONTACT FOR LEAD FREE
 - C.15u" GOLD ON CONTACT FOR LEAD FREE
3. REFLOW SOLDER CAPABLE TO 260°C
4. APPLICABLE CABLE
 - AWG#38~42
 - AWG#36

CKT	A	B	C	D	E
10	8.6	9.8	3.6	4.1	5.0
12	9.4	10.6	4.4	4.9	5.8
14	10.2	11.4	5.2	5.7	6.6
20	12.6	13.8	7.6	8.1	9.0
30	16.6	17.8	11.6	12.1	13.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°


PPOJECTION

照片框

ORDER INFORMATION

FIJ-HSxx-xx-LF
SERIES
LEADFREE
10~30WAY
36:36AWG WITHOUT CLAPBOARD
38:38~42AWG WITH CLAPBOARD
SOLDER
HOUSING


DESCRIPTION:

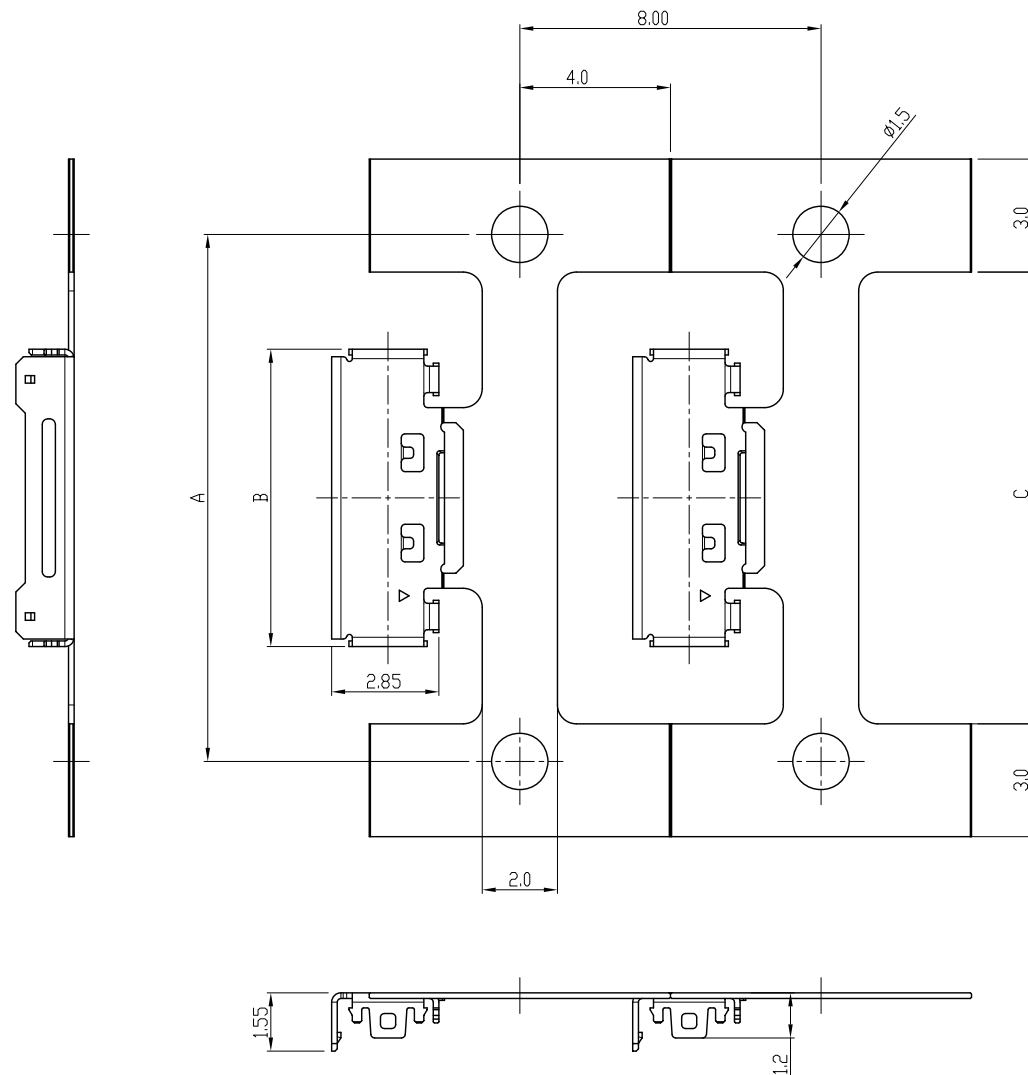

NOTES:

1. MATERIAL:PHOSPHOR BRONZE , THICKNESS 0.15±0.01
2. PLATING
PURE TIN 80~120u"
ALL UNDERPLATED 50u"~100u" DUCTILE NICKEL

CKT	A	B	C
10	14.0	7.90	12.0
12	14.8	8.70	12.8
14	15.6	9.50	13.6
20	18.0	11.90	16.0
30	22.0	15.90	20.0

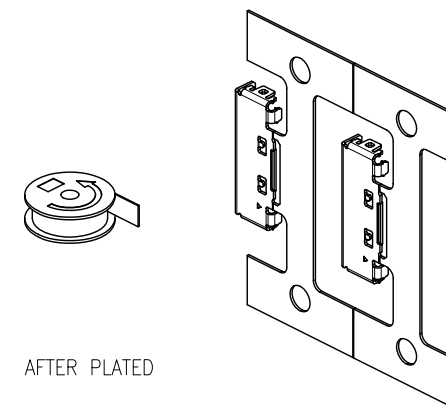

AFTER PLATED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°


PPOJECTION

照片框

ORDER INFORMATION

FIJ-HSxx-xx-LF
SERIES LEADFREE
10~30WAY
36:36AWG WITHOUT CLAPBOARD
38:38~42AWG WITH CLAPBOARD
SOLDER HOUSING


DESCRIPTION:

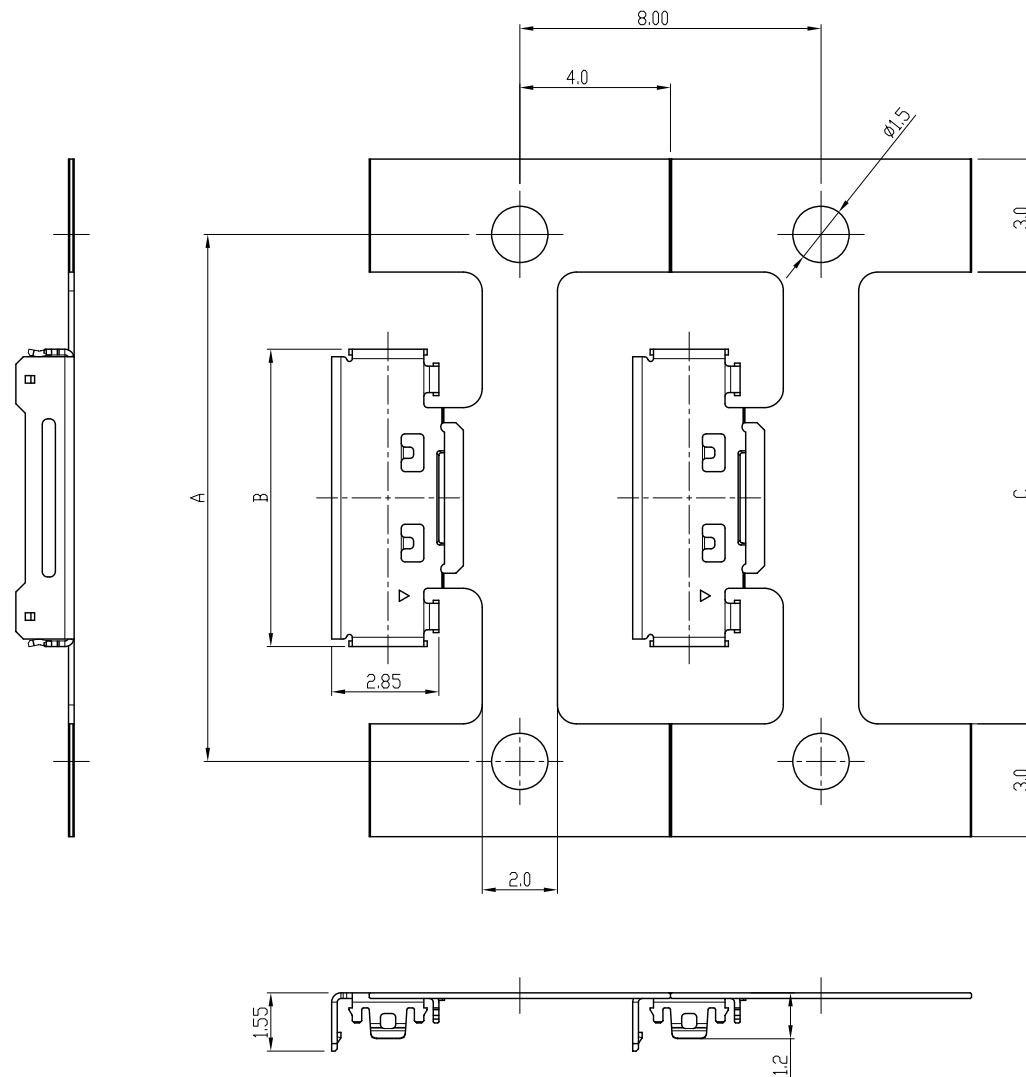

NOTES:

1. MATERIAL:PHOSPHOR BRONZE , THICKNESS 0.15±0.01
2. PLATING
PURE TIN 80~120u"
ALL UNDERPLATED 50u"~100u" DUCTILE NICKEL

CKT	A	B	C
10	14.0	7.90	12.0
12	14.8	8.70	12.8
14	15.6	9.50	13.6
20	18.0	11.90	16.0
30	22.0	15.90	20.0

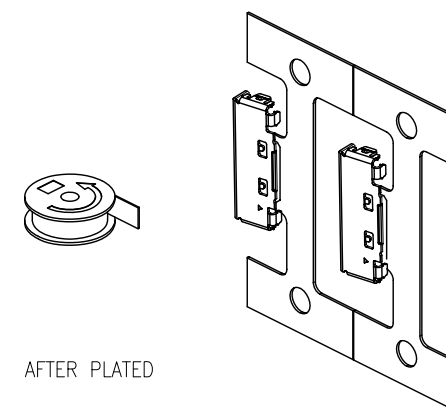

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°



PPOJECTION

照片框


ORDER INFORMATION

FIJ-HSxx-xx-LF
SERIES LEADFREE
10~30WAY
36:36AWG WITHOUT CLAPBOARD
38:38~42AWG WITH CLAPBOARD
SOLDER HOUSING

DESCRIPTION:

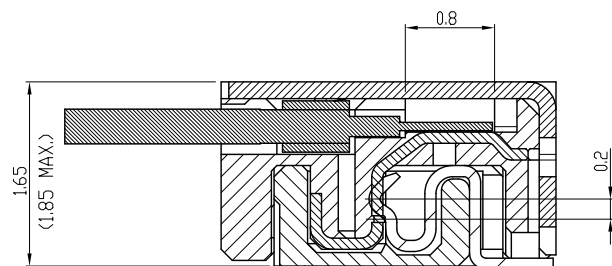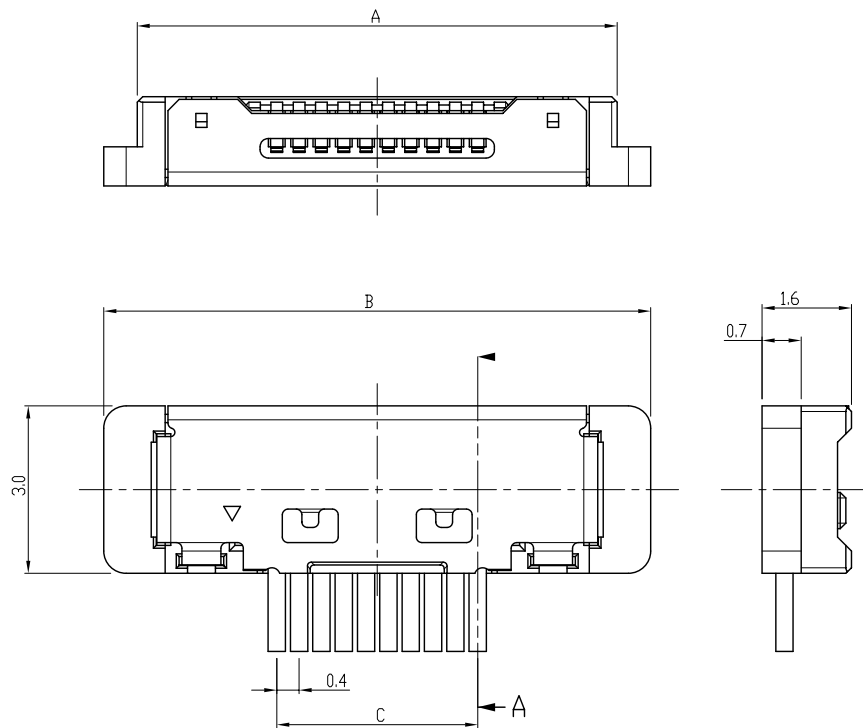

SECTION A-A
SCALE 2:1

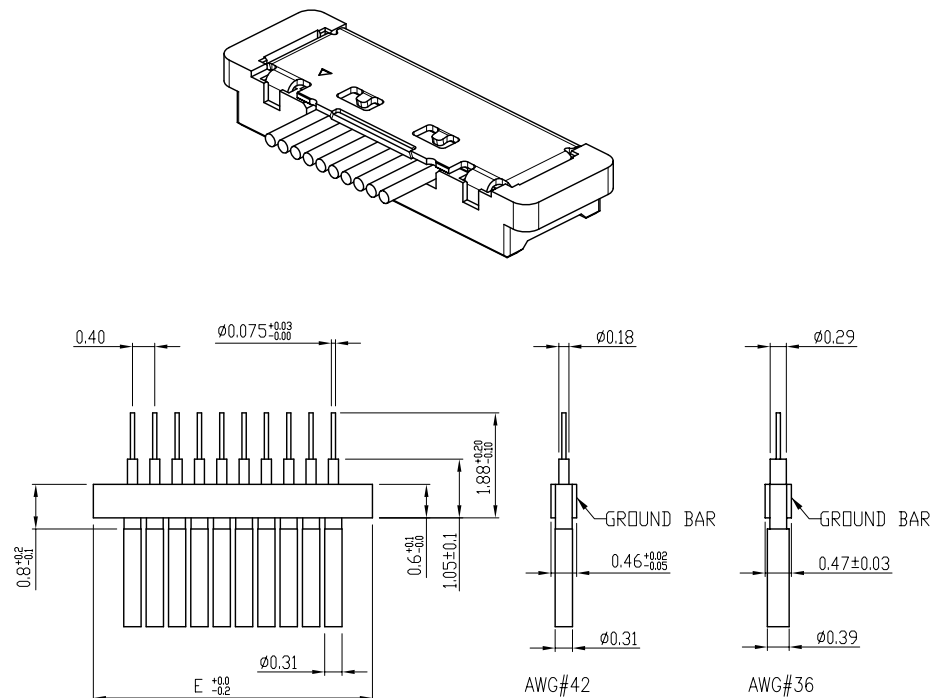

(CENTER CONDUCTOR)
SEC. CABLE

CKT	A	B	C	E
10	8.6	9.8	3.6	5.0
12	9.4	10.6	4.4	5.8
14	10.2	11.4	5.2	6.6
20	12.6	13.8	7.6	9.0
30	16.6	17.8	11.6	13.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X. ± 0.50
X. ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

FIJ-HSxx-xx-LF
SERIES LEADFREE
10~30WAY
36:36AWG WITHOUT CLAPBOARD
38:38~42AWG WITH CLAPBOARD
SOLDER HOUSING

DESCRIPTION: