

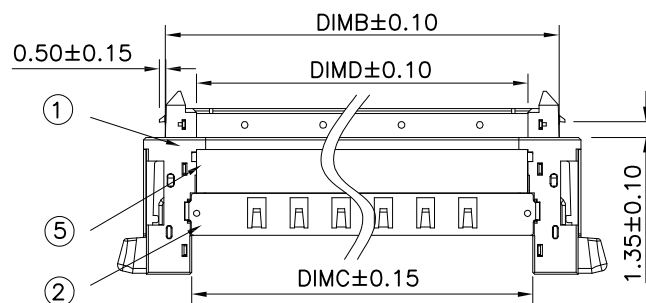
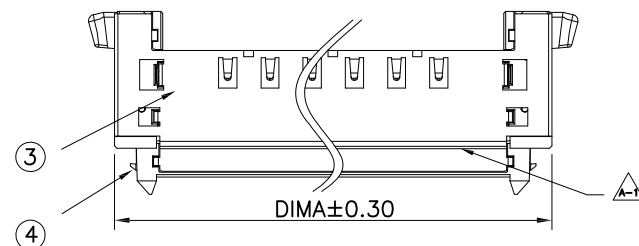
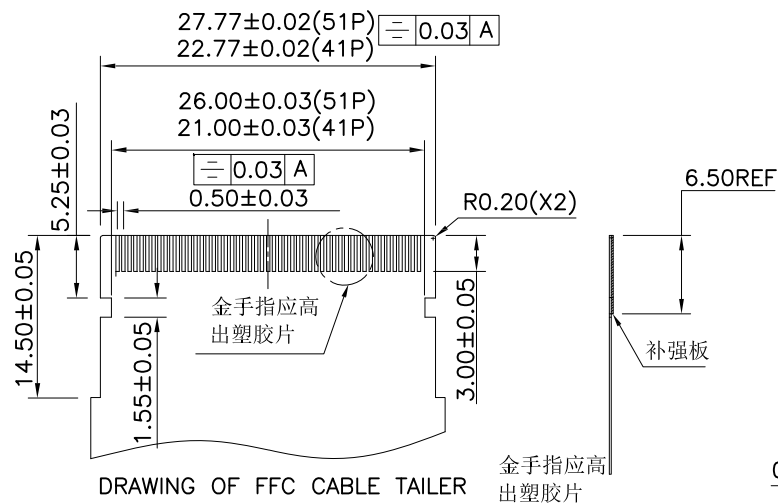


- NOTES:
- MATERIAL:
 - HOUSING: TERMOPLASTIC UL94V-0, BEIGE
 - CONTACT: COPPER ALLOY, T=0.15mm
PLATING: CONTACT AREA 5u" GOLD
SOLDER AREA 80u"~120u" TIN(LEAD FREE)
OVERALL WITH 50u" NICKEL UNDER PLATED.
 - SHELL: STAINLESS, t=0.15mm
PLATING: SOLDER AREA PLATED WITH GOLD FLASH
 - GROUND: COPPER ALLOY, t=0.15mm
PLATING: TIN(LEAD FREE)
2. SPECIFICATIONS:
- CURRENT RATING: 1A AC,DC
 - VOLTAGE RATING: 200V AC,DC
 - WITHSTANDING VOLTAGE: 500V AC/MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - OPERATING TEMPERATURE: -40°C~+80°C

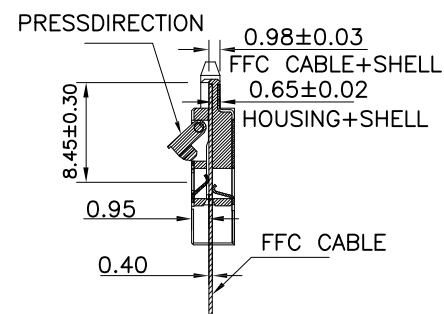

SECTION A-A



PARTNO.	A	B	C	D	E
51P	36.30	32.60	28.30	27.56	27.80
41P	31.30	27.60	23.30	22.56	22.80

5	SHAFT	1	LCP UL94V-0	BLACK	SHAPING
4	LOCK	2	SUST=0.25±0.01MM		STAMPING
3	LOWERSHELL	1	SUST=0.20±0.02MM		STAMPING
2	UPPERSHELL	1	SUST=0.15±0.02MM		STAMPING
1	HOUSING	1	LCP UL94V-0	BLACK	SHAPING
NO.	NAME	QUANTITY	MATERIAL	COLOR	REMARK

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1:1

.XX ± 0.15

DATE

.XXX ±

ANG ± 2°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

FIR-HF-xx-LF

SERIES | LEADFREE
41.51 WAY
FFC TYPE
HOUSING

DESCRIPTION: LVDS 公头线端 0.5 PITCH HOUSING FFC TYPE CONN

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com