

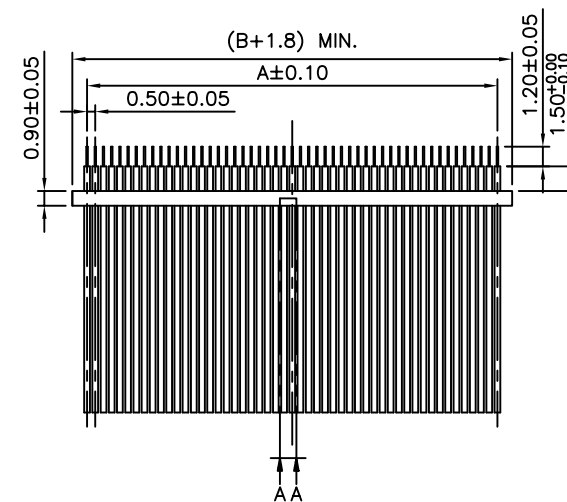

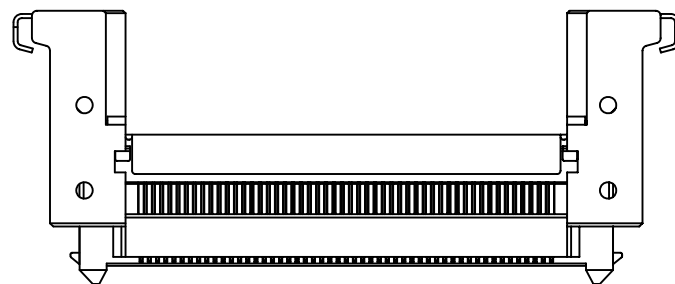



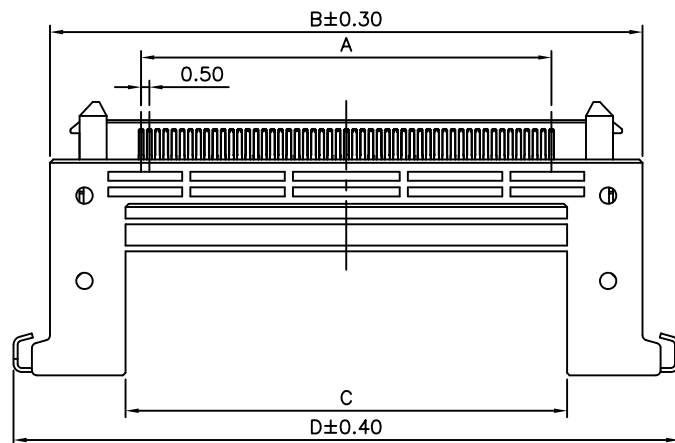

CABLE ASSEMBLED CONDITION(REF.)

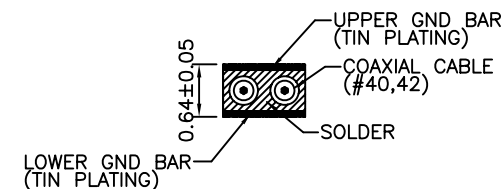

SECTION A-A

NOTES:

1. MATERIALS

INSULATOR: LCP. UL94-0.

CONTACT: COOPER ALLOY

△△ FRONT SHELL: Cu-Ni-Zn ALLOY

2. CONTACT FINISH: G2. 5u" GOLD ON CONTACT AREA, 3u" GOLD ON SOLDER AREA, BOTH OVER 50u" NICKEL.

G4. 15u" GOLD ON CONTACT AREA, 3u" GOLD ON SOLDER AREA BOTH OVER 50u" NICKEL

3. IMPORTANT AREA FLASH: 0.05mm MAX. DAMAGED: NA

FIR-HS-xx-LF

LEADFREE

RoHS Compliant

PIN	DIM	DIM A	DIM B	DIM C	DIM D
41		20.00	31.10	21.90	35.55
51		25.00	36.10	26.90	40.55

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FIR-HS-xx

DWG NO. FIR-HS-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA


REVISIONS

HK


DATE

煜倫股份有限公司


	1	2	3	4	5	6	7	8	9	0
J										
I										
H										
G										
F										
E										
D										
C										
B										
A										



TOP TRAY CASE NO SAMPLE
TR-017 02 LAYER



TR-017 16 LAYER

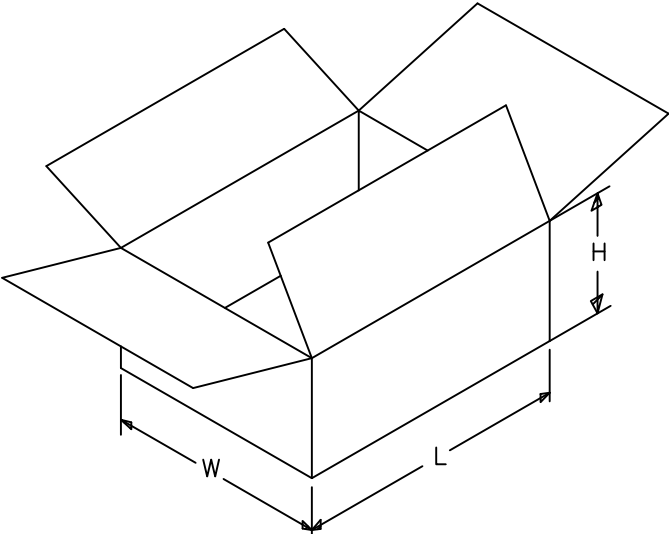

BC-008

PCAKING MATERIAL


PART NAME	PART NO.	DIM.(LxWxH)/mm	QUANTITY
TRAY CASE	TR-017	310X220X25	16
BIG CRTON	BC-008	470X340X180	1

PCAKING CAPACITY

PART NO.	PCS/TR	PCS/BC
	200PCS/TR	3000PCS/BC



煜倫股份有限公司

PART NO. FIR-HS-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:
DWG NO. FIR-HS-xx		DRAWING BY			
FILE NO.		PROJECTION 		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE