
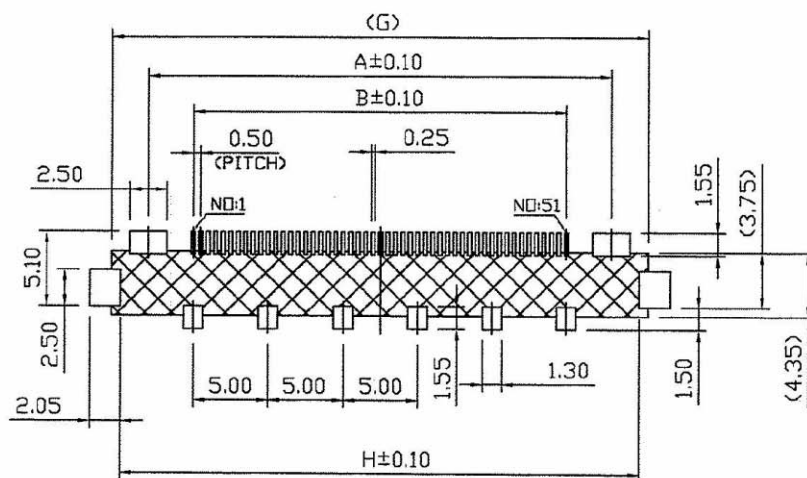


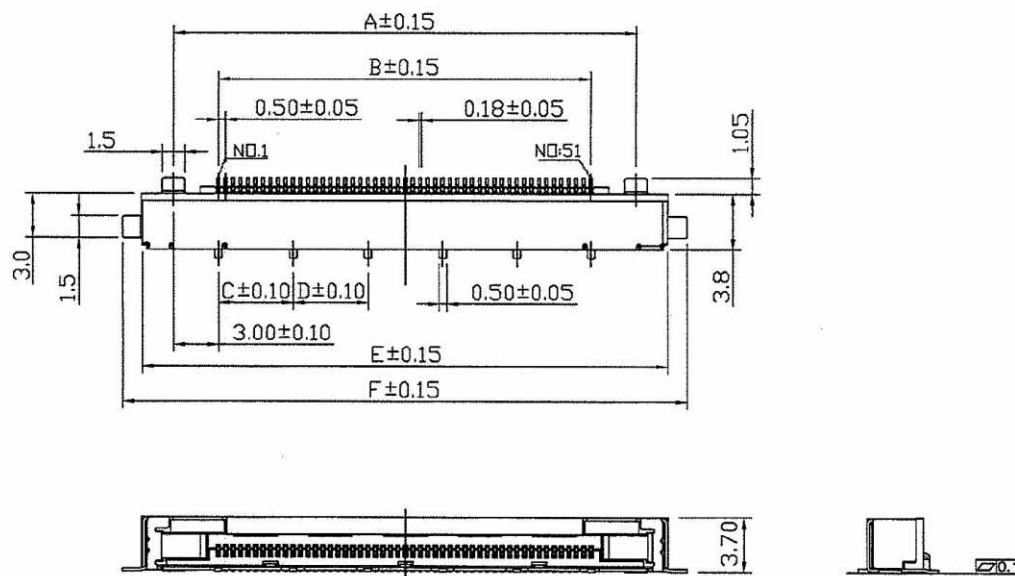

APPLICABLE P.C.B LAYOUT DIMENSION

Specifications :

Ectrical:

Current : Rating : 0.8A AC/DC

Voltage Rating : 100V AC/DC

Contact Resistance : 40m Ω Max.


Dielectric Withstanding Voitage: 500V AC/DC

Insulation Resistance: 100M Ω MIN

Operating Temperature: -40°C to +80°C

Matorial:

- ① Terminal : Copper alloy T=0.20mm
Plating : contact area 5u" Gold ,other area G/F
over all 40~80u" Nicket under plated
- ② Shell : Stainless steel T=0.20mm
Plating : matte Tin 70u" (Lead Free)
over all 20u" Nickel under plated
- ③ Housing: Thermoplastic UL94-V0 color : black

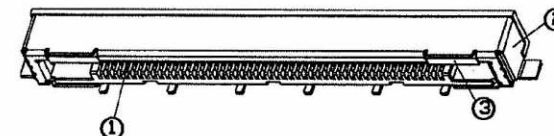

PIN NO.	A	B	C	D	E	F	G	H
51P	31.00	25.00	5.00	5.00	35.20	37.80	35.95	34.75

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG ±

照片框

ORDER INFORMATION

FIR-W-51-LF
SERIES T LEADFREE
51 WAY
90°SMT

DESCRIPTION: