
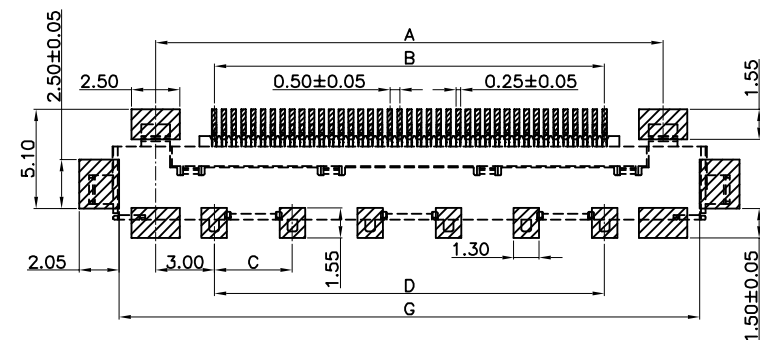


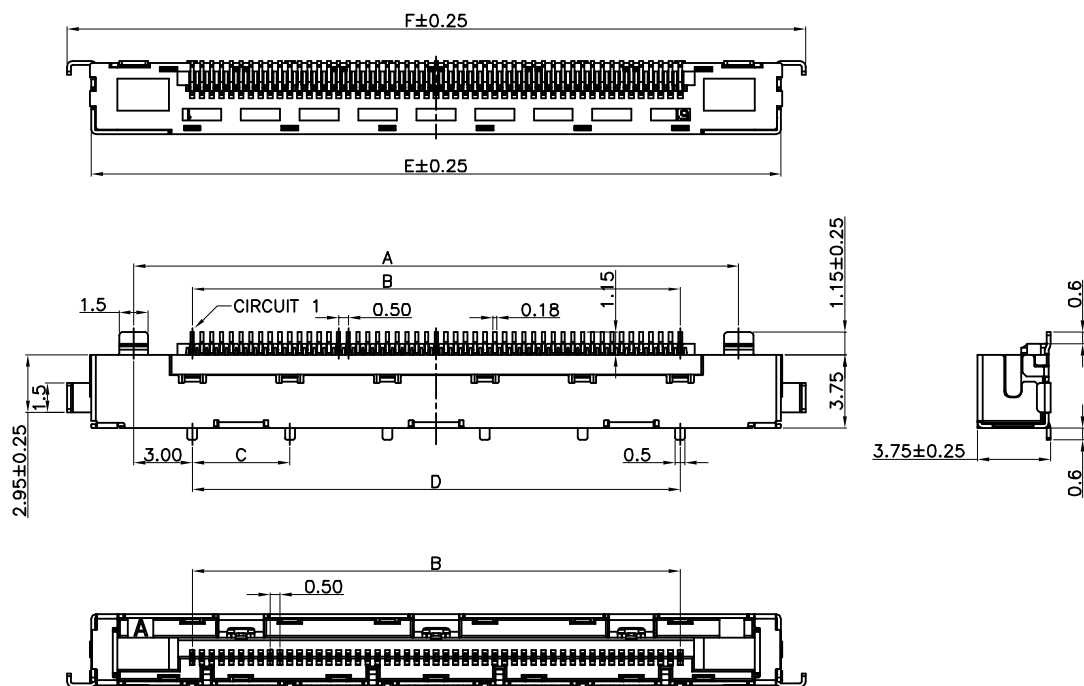

TOLERANCE: ± 0.10
RECOMMENDED P.C.B. Layout
TOP VIEW

NOTES:

- MATERIAL:
INSULATION: THERMOPLASTIC, UL94V-0 (BLACK)
CONTACT: COPPER ALLOY
SHELL: STAINLESS STEEL / GOLD FLASH ON SOLDER TAIL, OVER NICKEL TOLERANCE
- CONTACT FINISH: (VOID)---GOLD FLASH ON CONTACT AREA,
MATTE-TIN ON SOLDER TAIL, OVER NICKEL

PIN	DIM. (mm)						
	A	B	C	D	E	F	G
41	26.00	20.00	4.00	20.00	30.35	32.85	29.75
51	31.00	25.00	5.00	25.00	35.35	37.85	34.75

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

照片框

ORDER INFORMATION

FIR-W-xx-LF
SERIES | LEADFREE
41.51 WAY
90°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 0.5mm, SMT TYPE, ASSEMBLY