


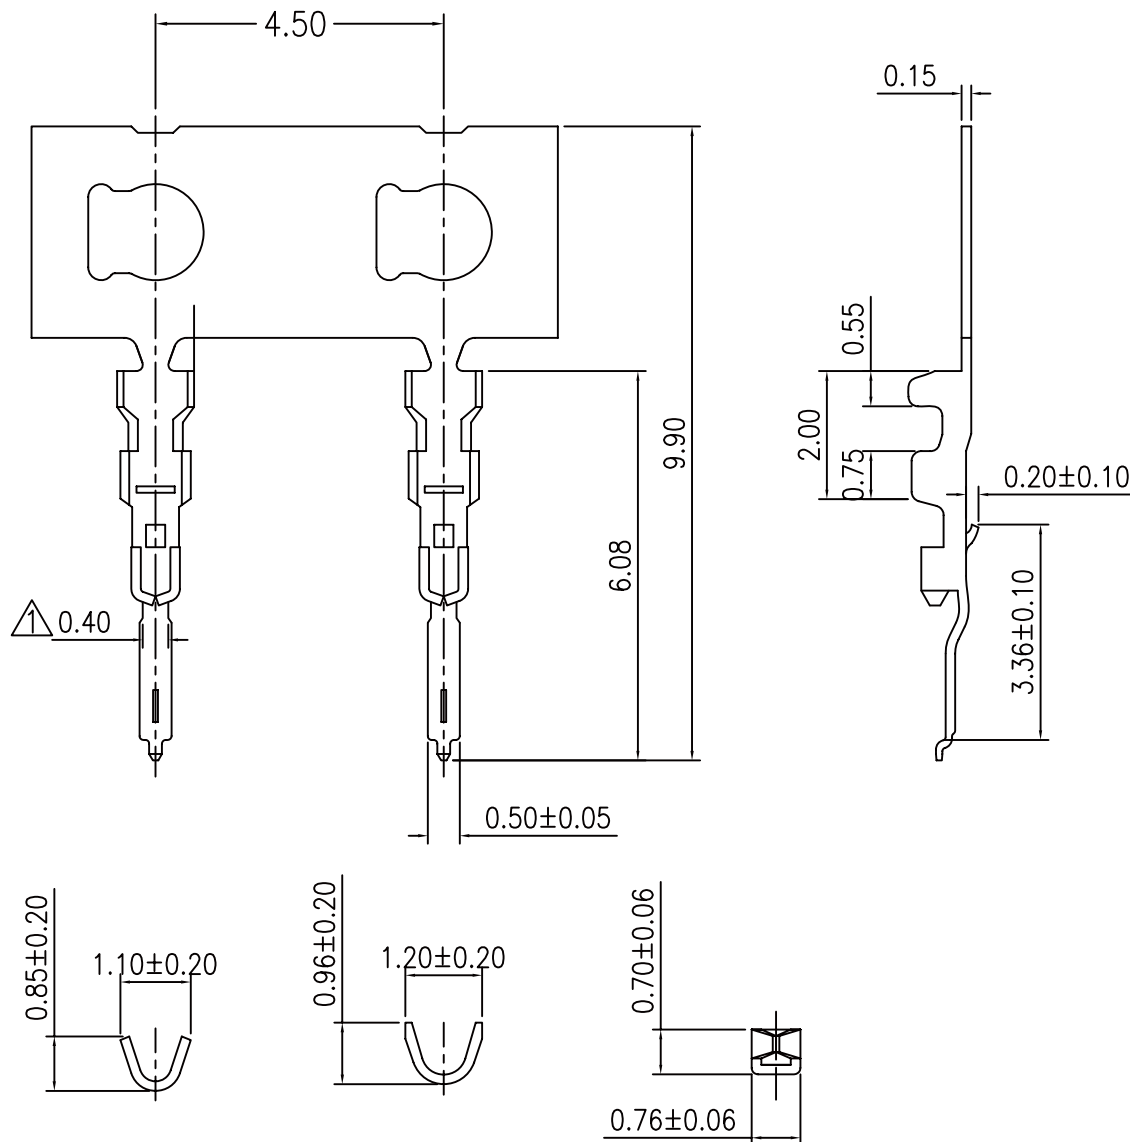

SPECIFICATIONS

- . Voltage Rating : 200V AC/DC
- . Current Rating : 1A AC/DC
- . Withstanding Voltage : 500V AC/minute
- . Insulation Resistance : 100M Ω min
- . Temperature Range : -40°C to +80°C
- . Contact Resistance : 40m Ω max

TERMINAL

- . Applicable Wires :AWG#30-36
- . Material: Phos.Bronze
- . Thickness : 0.15mm
- . Q'ty : 20,000pcs/Reel

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PJECTION



ORDER INFORMATION

FIX-TG-30-LF
SERIES | LEADFREE
30-36 AWG
GOLD
TERMINAL

DESCRIPTION: