


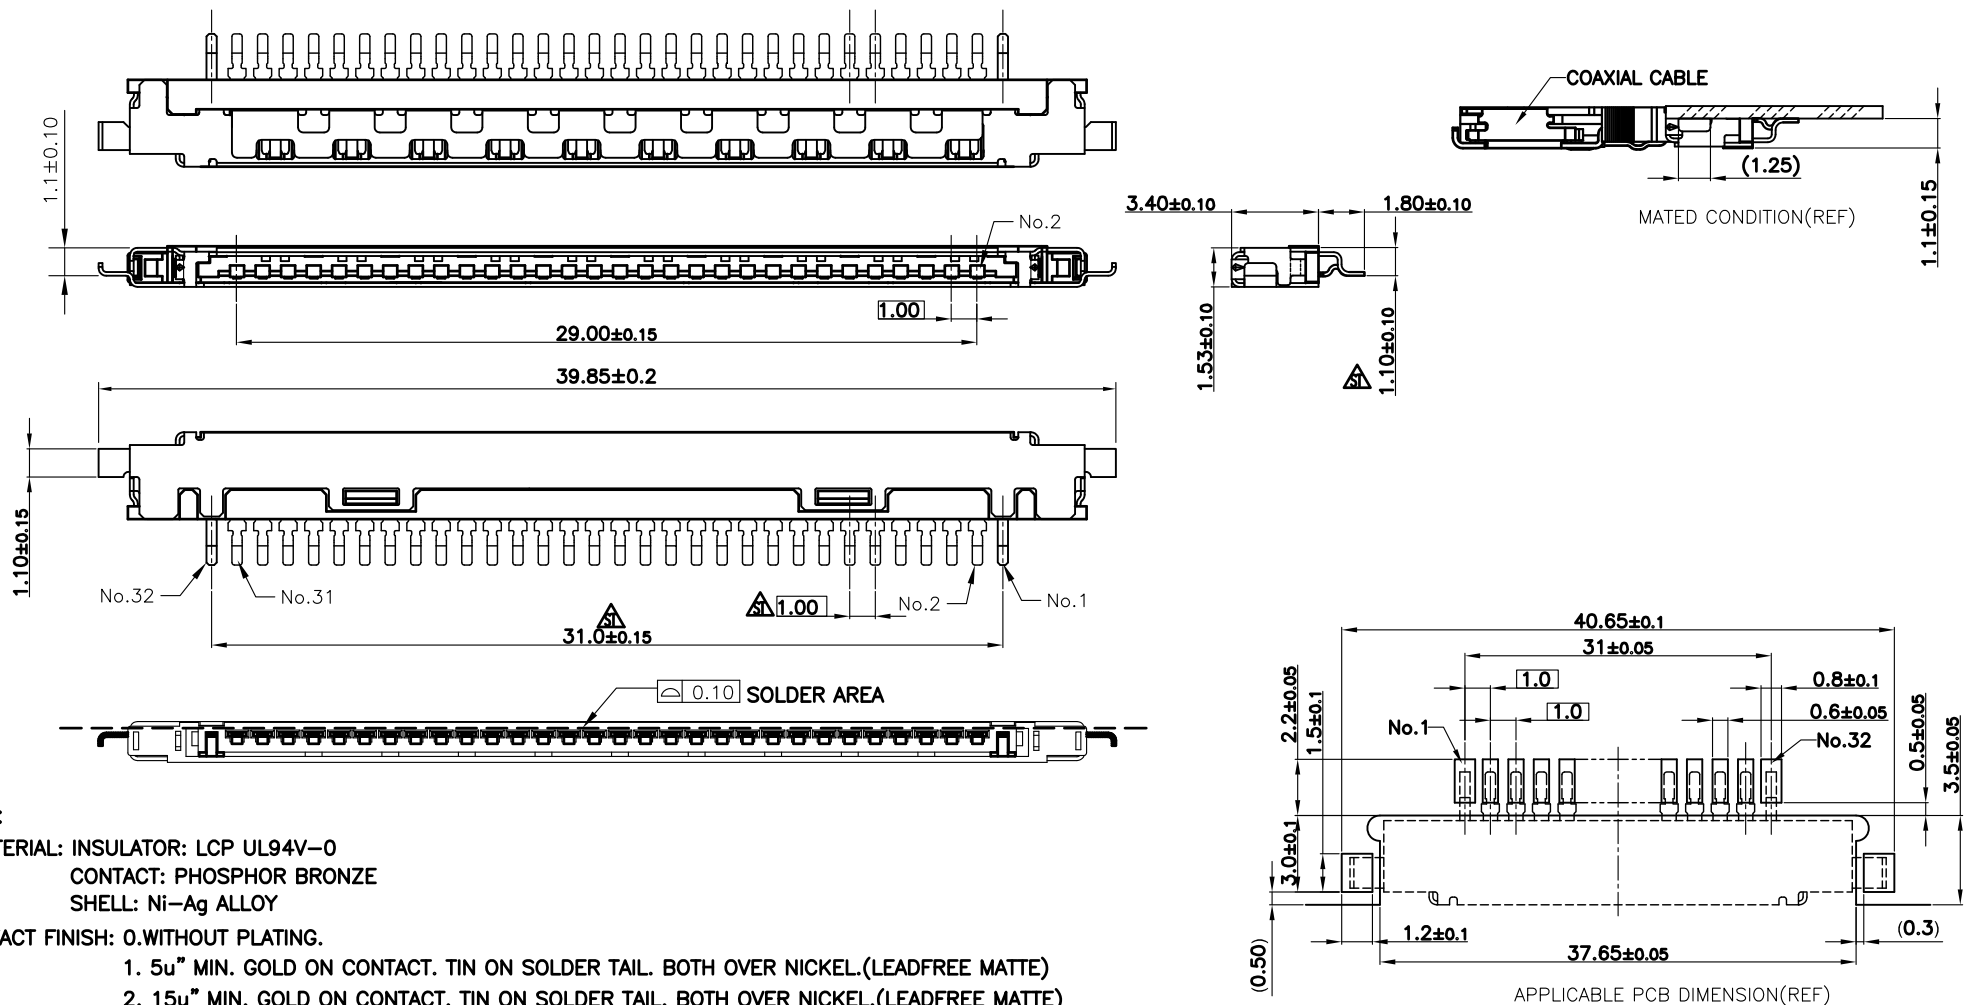

NOTES:

1. MATERIAL: INSULATOR: LCP UL94V-0
CONTACT: PHOSPHOR BRONZE
SHELL: Ni-Ag ALLOY
- 2.CONTACT FINISH: 0.WITHOUT PLATING.
 1. 5u" MIN. GOLD ON CONTACT. TIN ON SOLDER TAIL. BOTH OVER NICKEL.(LEADFREE MATTE)
 2. 15u" MIN. GOLD ON CONTACT. TIN ON SOLDER TAIL. BOTH OVER NICKEL.(LEADFREE MATTE)
3. IMPORTANT AREA FLASH: 0.05mm MAX. DAMAGE: NA. DEFAME: NA.
4. LOGO TYPE: 1.WITH LOGO , 2. WITHOUT "TYCO" LOGO
5. PACKING TYPE: 1.REEL 2.TRAY 3.TUBE
6. INSPECTING POINT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±



ANG ±

照片框

ORDER INFORMATION

FIX-WXF11BR-30-LF
SERIES | | | | LEADFREE
30WAY
REEL
BOTTOM CONTACT
90°SMT | | | | OFFSET 1.1mm
NON POST

DESCRIPTION:

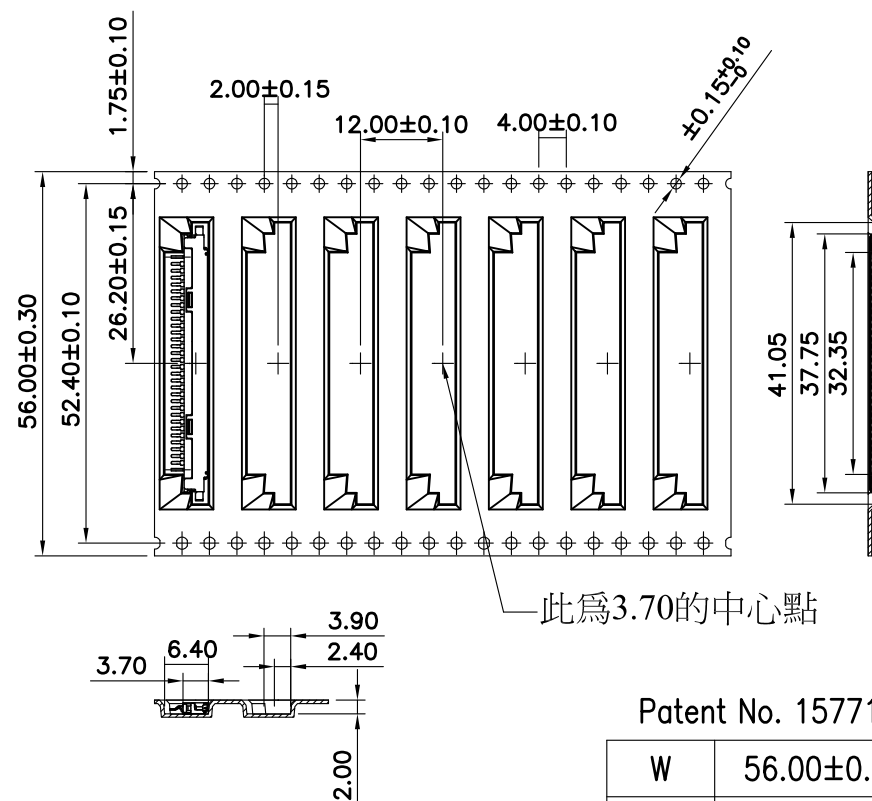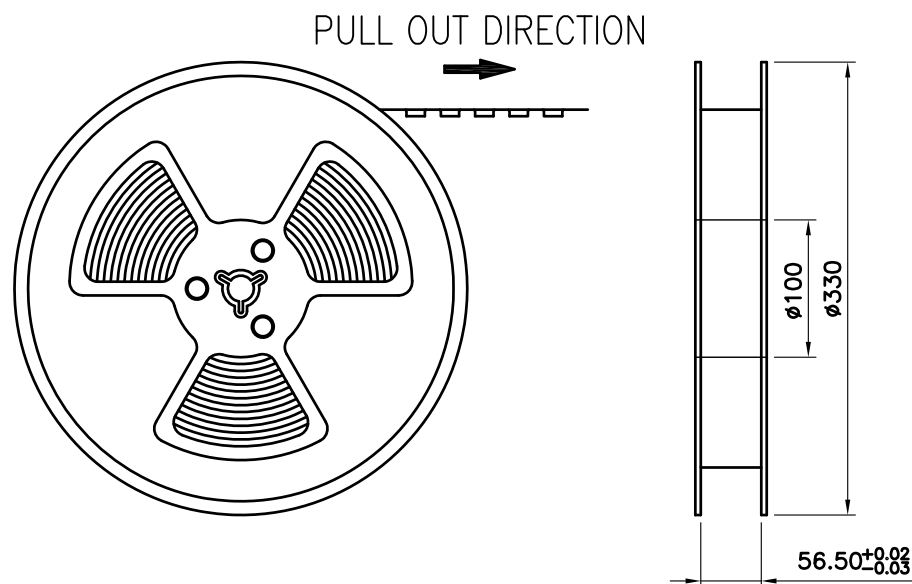

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Component load per 13" reel : 2500 pcs.

Patent No. 157713

W	56.00 ± 0.30
A0	3.70 ± 0.10
B0	37.75 ± 0.10
K0	2.00 ± 0.10

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$


PPOJECTION

照片框

ORDER INFORMATION

FIX-WXF11BR-30-LF
SERIES T T T T LEADFREE
30WAY
REEL
BOTTOM CONTACT
90°SMT OFFSET 1.1mm
NON POST

DESCRIPTION:

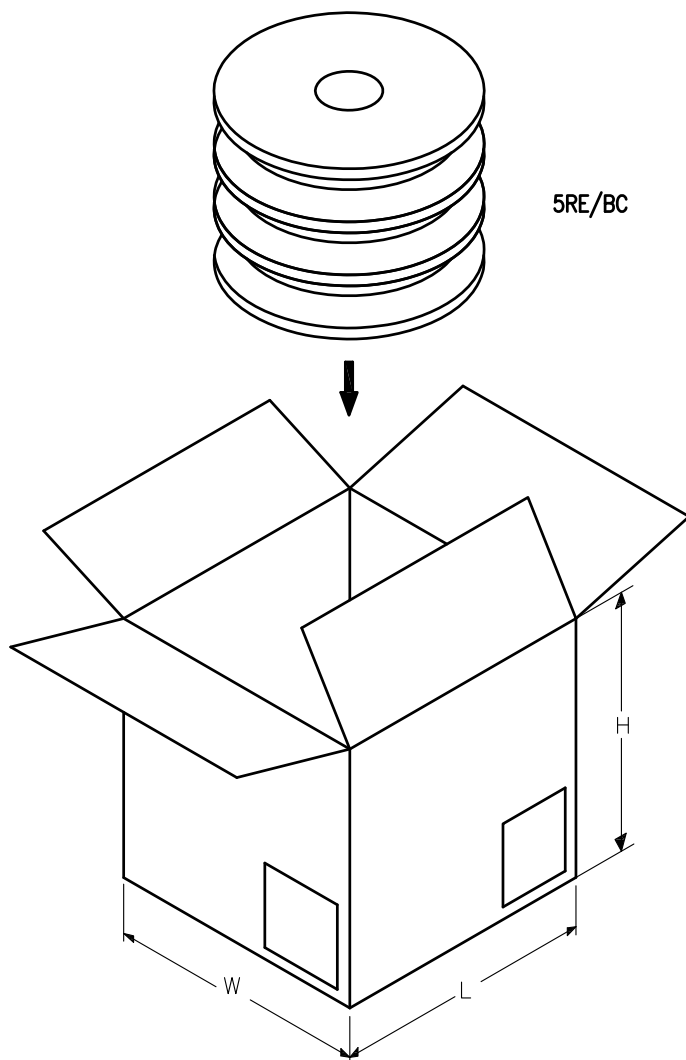

5RE/BC

PCAKING MATERIAL

PART NAME	DIM(mm)
REEL	330X56.5
BIG CRTON	350X350X340

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
FIX-WXF11BR-30	2500PCS/RE	5 RE/BC	12500 PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FIX-WXF11BR-30-LF
SERIES | | | | LEADFREE
30WAY
REEL
BOTTOM CONTACT
90°SMT | OFFSET 1.1mm
NON POST

DESCRIPTION: