


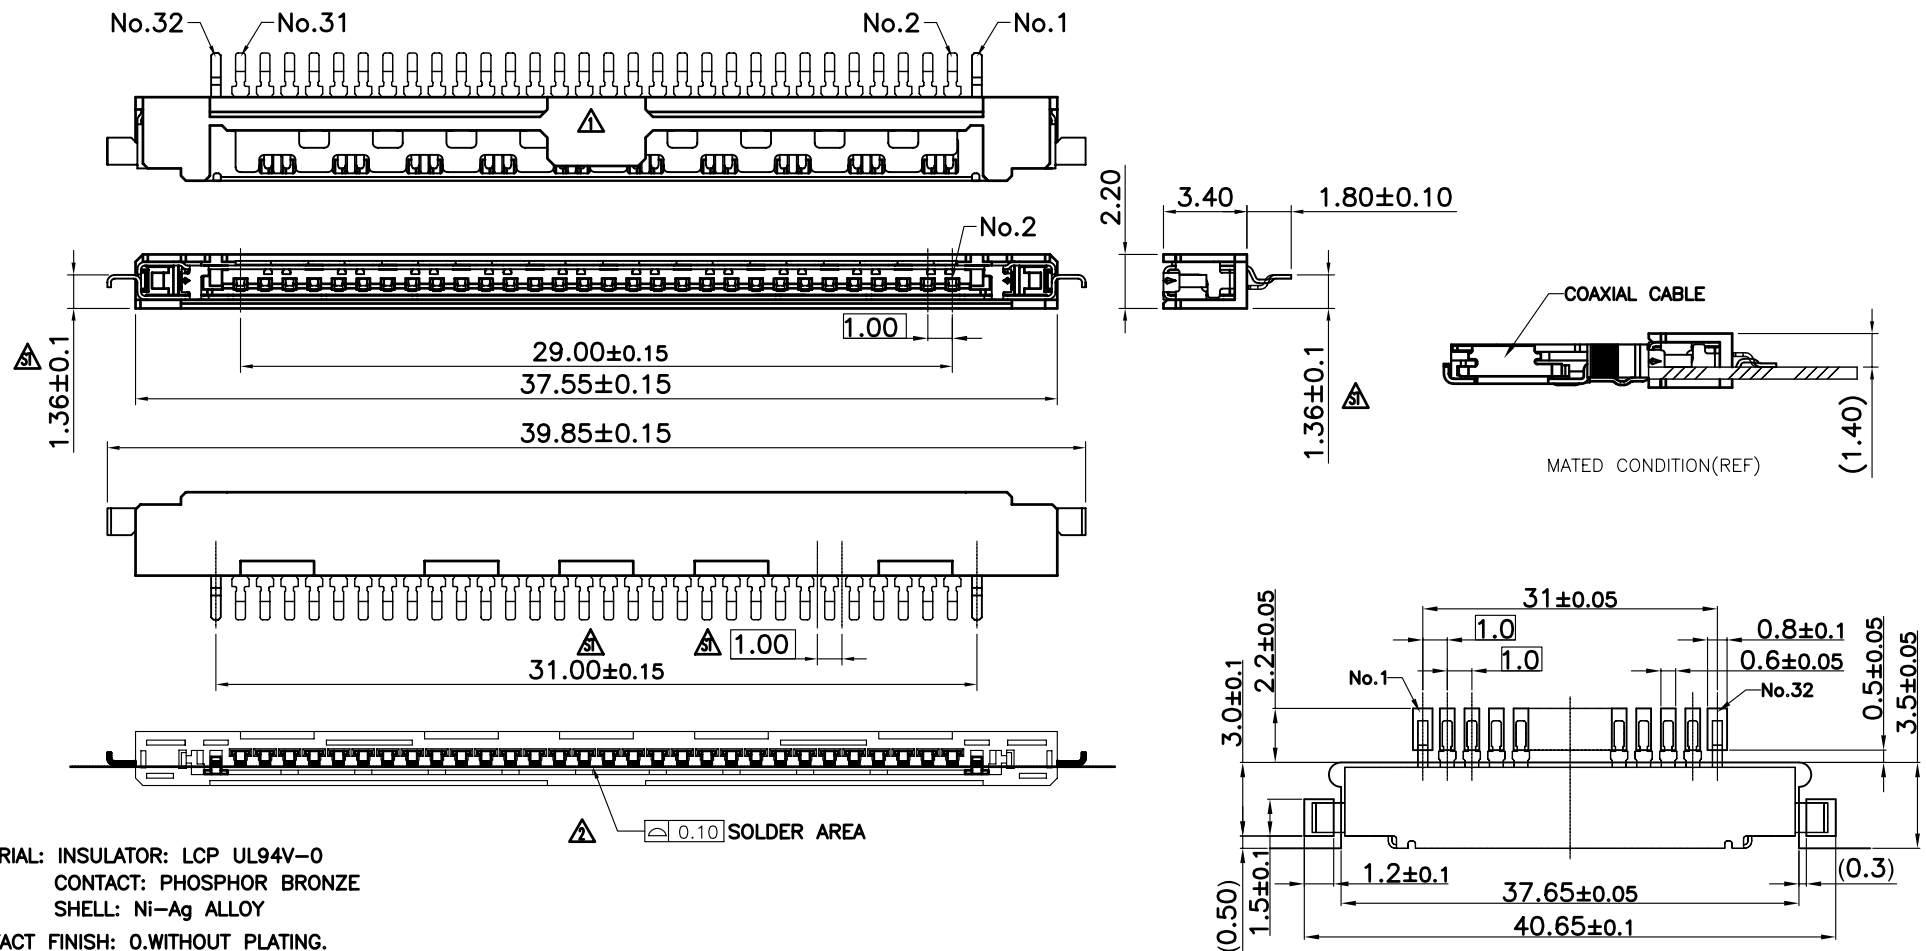

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±



PPOJECTION

照片框

ORDER INFORMATION

FIX-WXF14AR-30-LF
SERIES
LEADFREE
30WAY
REEL
TOP CONTACT
OFFSET 1.4mm
NON POST
90°SMT

DESCRIPTION:

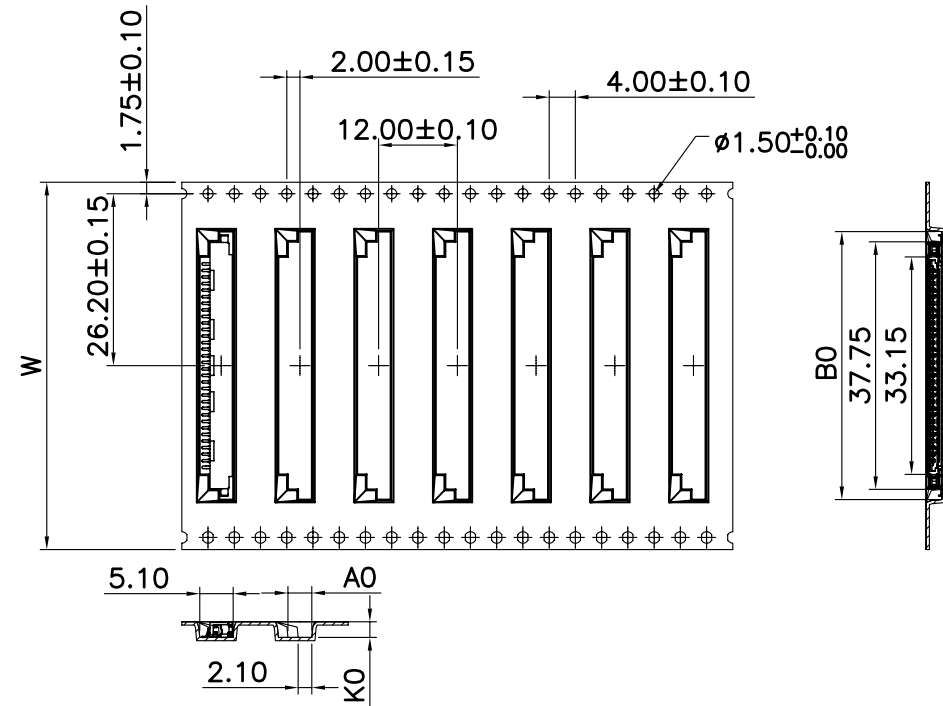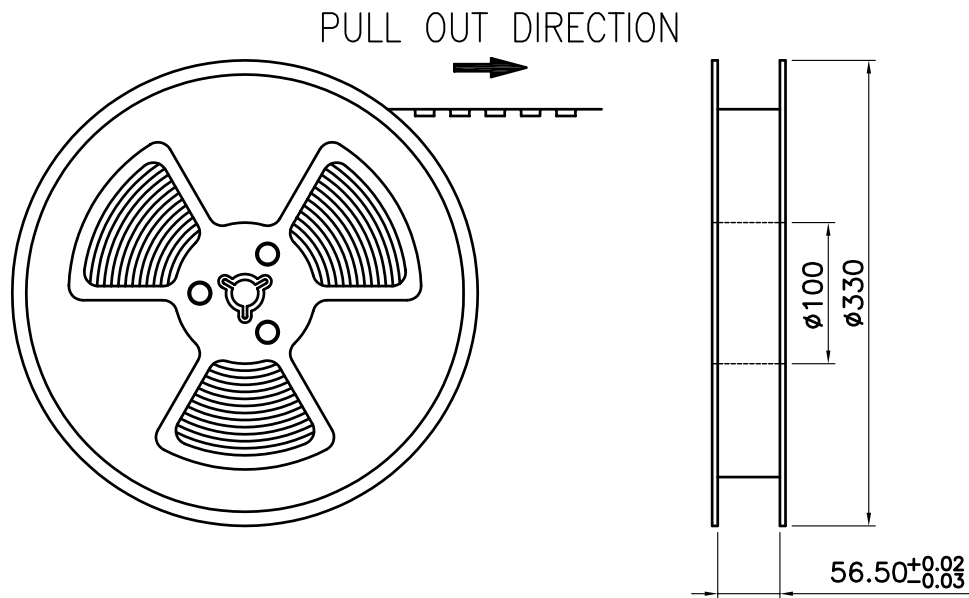

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy
4. All dimensions meet EIA-481-C requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Component load per 13" reel : 2000 pcs.

Patent No. 157713

W	56.00±0.30
A0	3.65±0.10
B0	40.85±0.10
K0	2.50±0.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FIX-WXF14AR-30-LF
SERIES
90°SMT
LEADFREE
30WAY
REEL
TOP CONTACT
OFFSET 1.4mm
NON POST

DESCRIPTION:

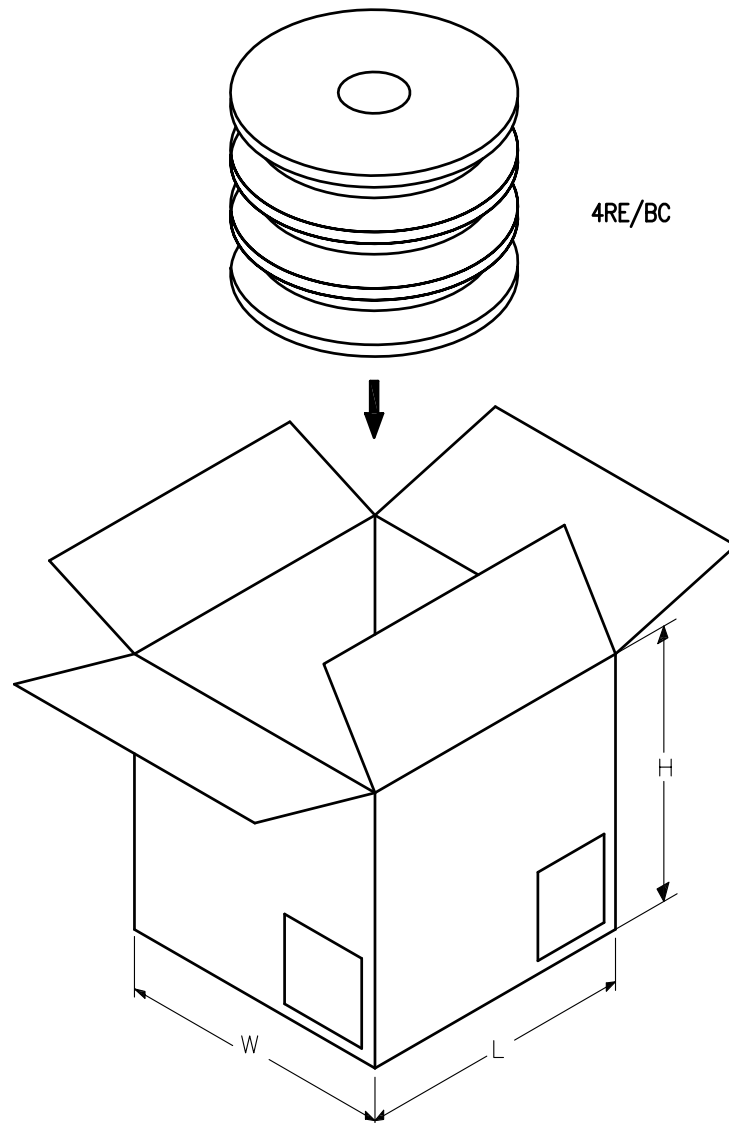

4RE/BC

PCAKING MATERIAL

PART NAME	DIM(mm)
REEL	330X56.5
BIG CRTON	350X350X340

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
FIX-WXF14AR-30	2000PCS/RE	4 RE/BC	8000 PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FIX-WXF14AR-30-LF
SERIES | | | | LEADFREE
| | | | 30WAY
| | | | REEL
| | | | TOP CONTACT
90°SMT | | | | OFFSET 1.4mm
| | | | NON POST

DESCRIPTION: