
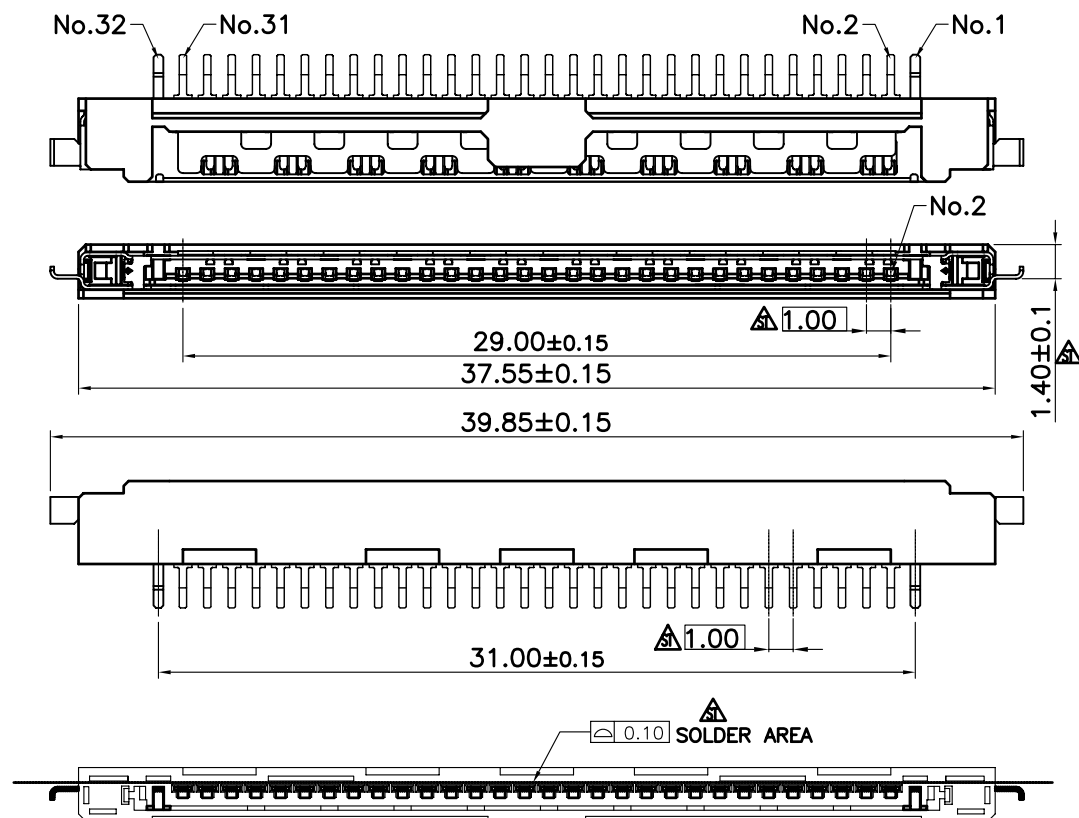


MATED CONDITION(REF)

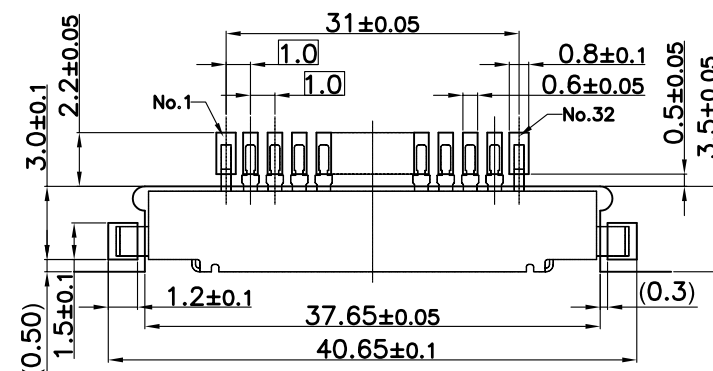

APPLICABLE PCB DIMENSION(REF)

NOTES:

1. MATERIAL: INSULATOR: LCP UL94V-0
CONTACT: PHOSPHOR BRONZE
SHELL: Ni-Ag ALLOY
2. CONTACT FINISH: 0.WITHOUT PLATING.
1. 5u" MIN. GOLD ON CONTACT. TIN ON SOLDER TAIL. BOTH OVER NICKEL.(LEADFREE MATTE)
2. 15u" MIN. GOLD ON CONTACT. TIN ON SOLDER TAIL. BOTH OVER NICKEL.(LEADFREE MATTE)
3. IMPORTANT AREA FLASH: 0.05mm MAX. DAMAGE: NA. DEFAE: NA.
4. PACKING TYPE: 1.REEL 2. TRAY
5. INSPECTING POINT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FIX-WXF14BR-30-LF
SERIES
LEADFREE
30WAY
REEL
BOTTOM CONTACT
90°SMT
OFFSET 1.4mm
NON POST

DESCRIPTION:

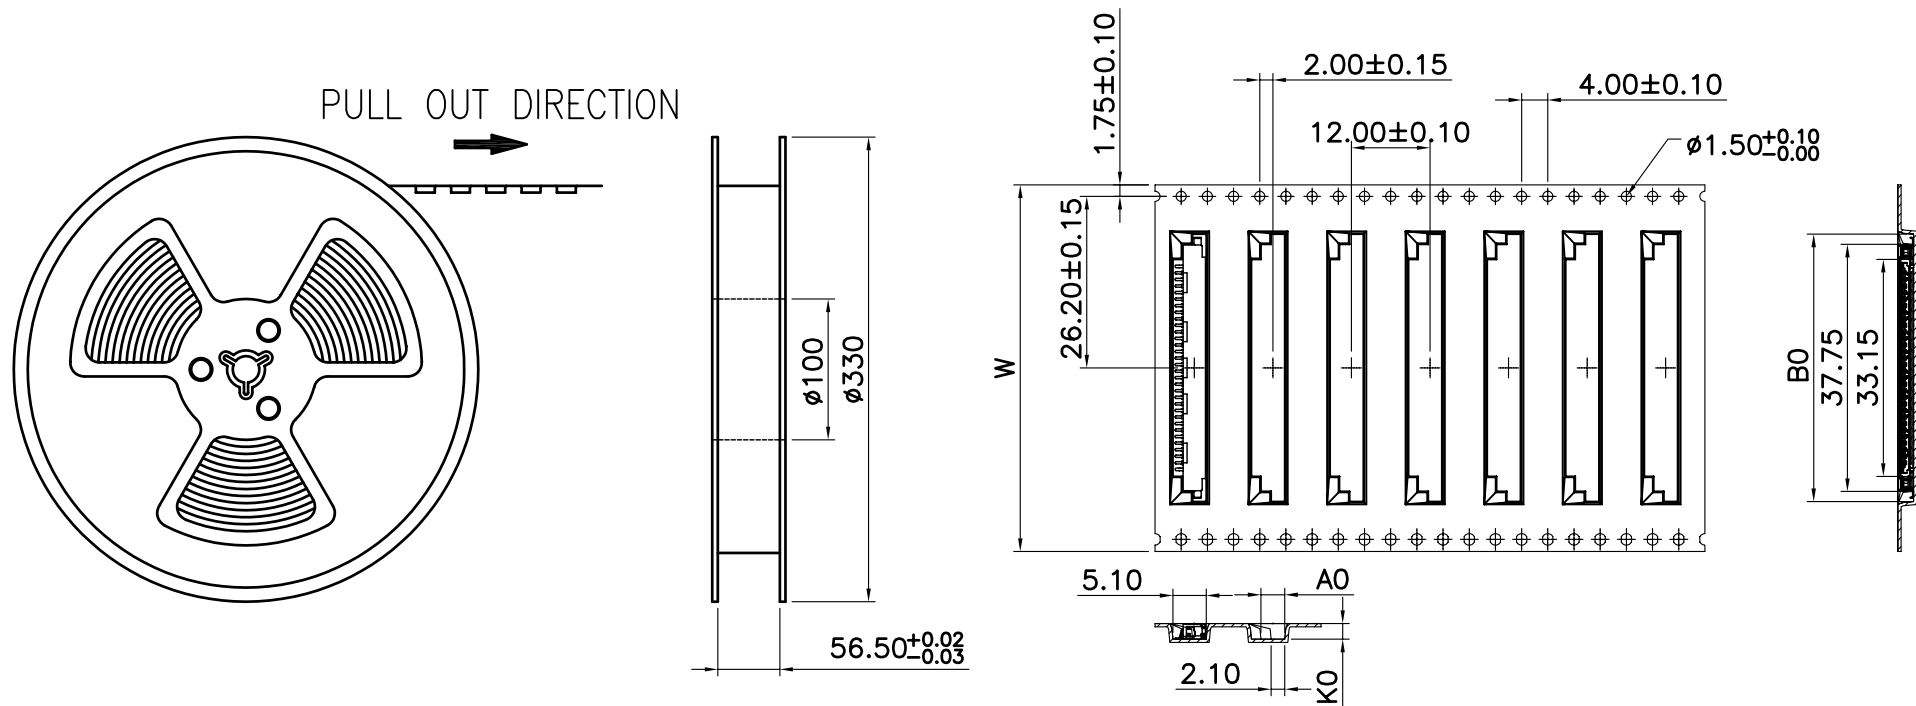

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy
4. All dimensions meet EIA-481-C requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Component load per 13" reel : 2000 pcs.

Patent No. 157713

W	56.00 ± 0.30
A0	3.65 ± 0.10
B0	40.85 ± 0.10
K0	2.50 ± 0.10

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$


PPOJECTION

照片框

ORDER INFORMATION

FIX-WXF14BR-30-LF
SERIES T T T T LEADFREE
30WAY
REEL
BOTTOM CONTACT
90°SMT OFFSET 1.4mm
NON POST

DESCRIPTION:

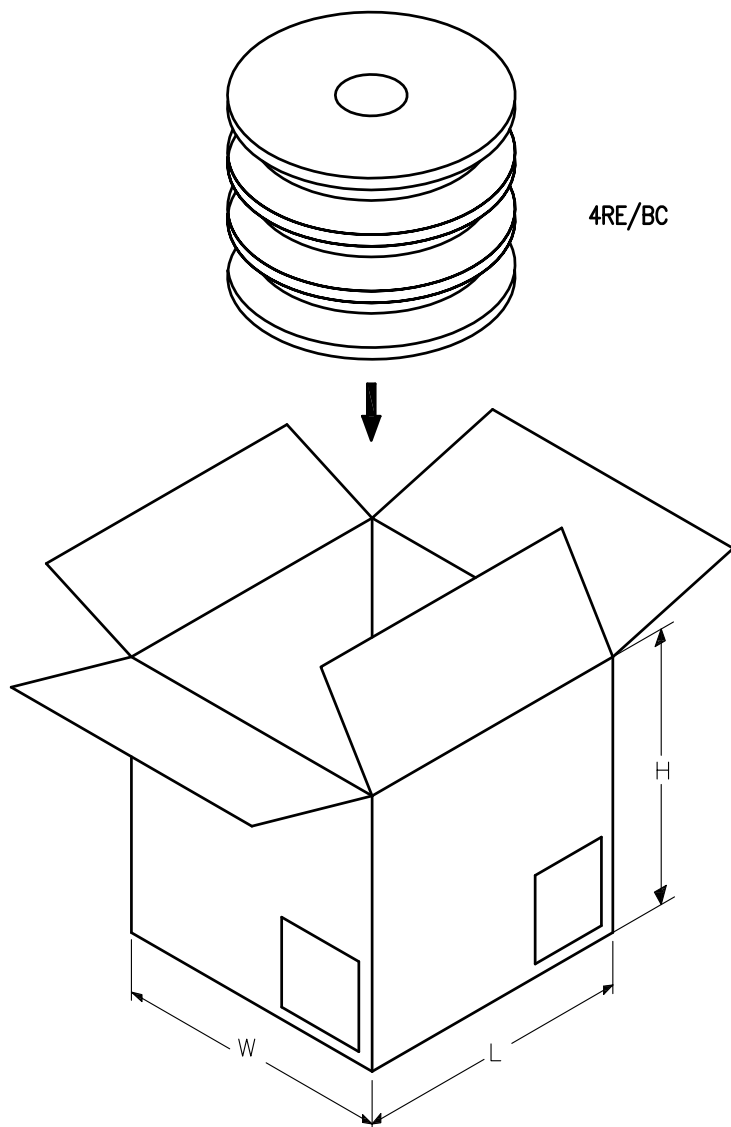

4RE/BC

PCAKING MATERIAL

PART NAME	DIM(mm)
REEL	330X56.5
BIG CRTON	350X350X340

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
	2000PCS/RE	4 RE/BC	8000 PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FIX-WXF14BR-30-LF
SERIES | | | | LEADFREE
| | | | 30WAY
| | | | REEL
| | | | BOTTOM CONTACT
90°SMT | | | | OFFSET 1.4mm
| | | | NON POST

DESCRIPTION: