


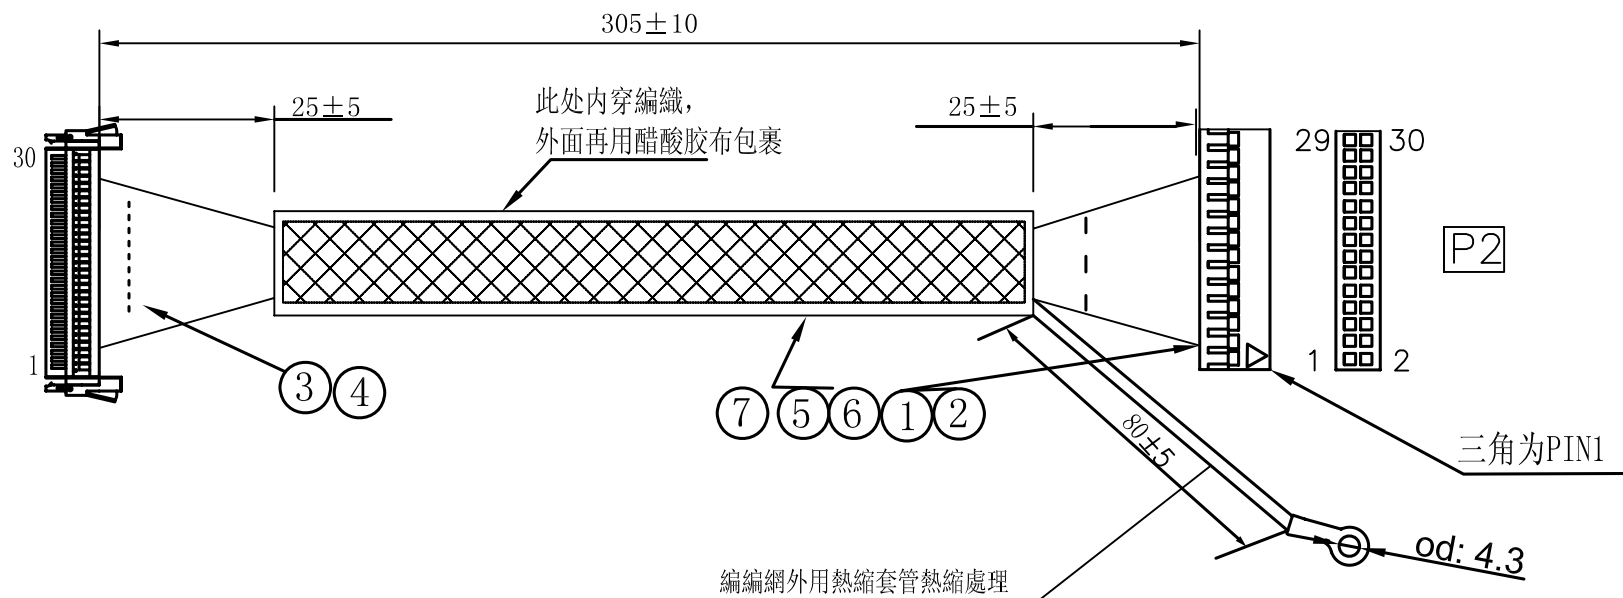

P1		P2
黑 1	1	1
紅 2	2	2
紅 3	3	3
NC 4	4	4
NC 5	5	5
NC 6	6	6
NC 7	7	7
白 8	8	8
藍 9	9	9
黑 10	10	10
白 11	11	11
藍 12	12	12
黑 13	13	13
白 14	14	14
藍 15	15	15
黑 16	16	16
白 17	17	17
藍 18	18	18
黑 19	19	19
NC 20	20	20
NC 21	21	21
NC 22	22	22
NC 23	23	23
NC 24	24	24
NC 25	25	25
NC 26	26	26
NC 27	27	27
NC 28	28	28
NC 29	29	29
NC 30	30	30

注：线材部份包成圆形

7	1		編織	24/6/0.12
6			醋酸胶布	富立宽:W=40
5			UL1571#32AWG 7/0.08 OD:0.4	威雅:蘭白紅黑
4	15		TERMINAL	FI-X-HL-T(A100ITOP-00 OR EQ)
3	1		HOUSING	FI-X30HL(JWT:A1001HSO-30P-HL OR EQ)
2	15		TERMINAL	杜邦2.0(JWT:A2005T OR EQ)
1	1		HOUSING	杜邦2.0:2*15(JWT:A2005H02-2*15P OR EQ)
项目	用量	材料代号	品名	厂商规格

注：1. 对绞 "X"

测试条件:

1. 100%做导通测试
2. 导通阻抗: 5 Ω /MAX
3. 绝缘阻抗: 5M Ω /MIN
4. 测试电压: 200V DC

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FIXMPV-30B1532-E30C5-LF

SERIES

LEADFREE

305mm

MALE TO FEMALE

32 AWG

30 TO 30 WAY

DESCRIPTION: