


P1	WIRE COLOR		P2
1	RED		19
2	RED		20
3	RED		21
4	RED		22
5	BLACK		13
6	BROWN		14
7	ORANGE		15
8	YELLOW		16
9	GREEN		28
10	NC		
11	BLUE		17
12	BLACK	TWIST PAIR	10
13	WHITE		9
14	PURPLE		18
15	BROWN	TWIST PAIR	8
16	WHITE		7
17	GRAY		23
18	RED	TWIST PAIR	6
19	WHITE		5
20	WHITE		24
21	ORANGE	TWIST PAIR	12
22	WHITE		11
23	BLACK		25
24	YELLOW	TWIST PAIR	4
25	WHITE		3
26	BROWN		26
27	NC		
28	NC		
29	ORANGE		27
30	NC		

1. 所用材料全部符合ROHS要求.
2. 100%導通測試, 不可有短路, 斷路錯位及間歇性接觸不良
3. 出貨時產品外箱需貼UL橙色標籤 UL E136432 FORM N
4. 內部導電膠布短於外醋酸膠布. 導電布不可外露.
5. 出貨時PI端需單獨用汽泡布包裹HOUSING.
6. 對絞線需絞線 85 ± 10 圈. 對絞線差動阻抗為 $100 \pm 20 \Omega$

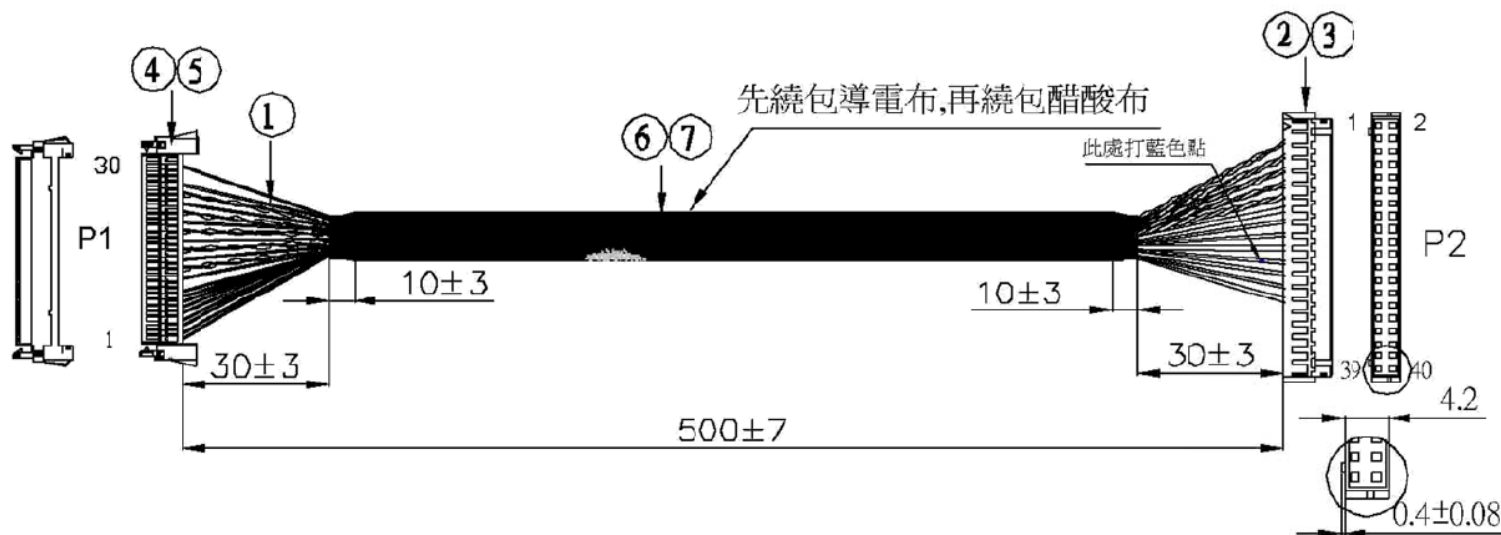

FIXPHD-3040-E50C-LF
LEADFREE
RoHS Compliant

7	CONDUCTIVE ADHESIVE TAPE	W:20mm*L:520mm GRAY	PC	1
6	ACETATE TAPE	W:20mm*L:540mm BLACK	PC	1
5	HOUSING	FIX-H-30	PC	1
4	TERMINAL	FIX-T	PCS	26
3	HOUSING	PHD-H-40	PC	1
2	TERMINAL	PHD-T-24	PCS	26
1	WIRE	UL 1571#28 OD:0.6mm	PCS	26
ITEM	DESCRIPTION	SPECIFICATION	UNIT	Q'TY



PART NO.FIXPHD-3040-E50C

DWG NO. FIXPHD-3040-E50C


FILE NO.

UNIT / mm

SCALE 1:1

DRAWING BY

PROJECTION



TOLERANCES ARE

 $\bar{X} \pm 0.2$ $.XX \pm$ $\text{.XXX} \pm$

AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE _____

煜倫股份有限公司