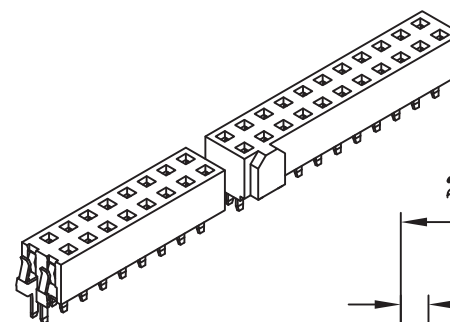
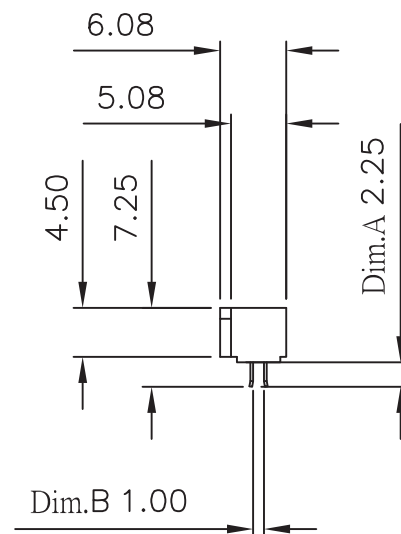
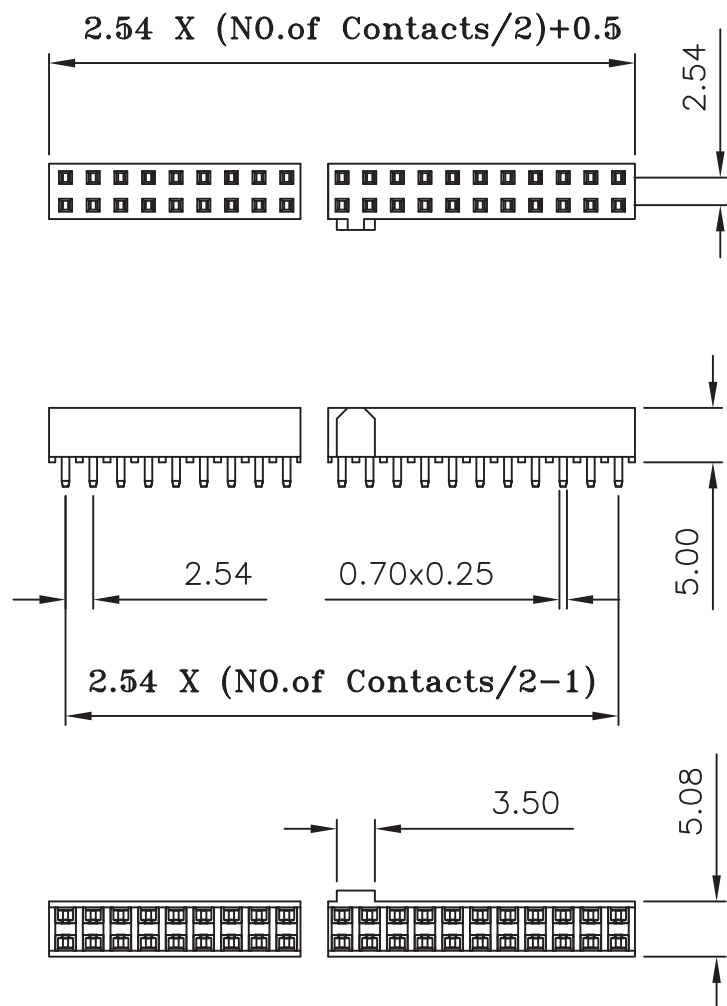


Recommended P.C. Board
Hole Layout

Current Rating: 3 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: AC 1000 V
 Operating Temperature: - 40° ~ +85° C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester,UL 94V-0
 Standard: PBT
 Finish: Tin,Gold Plated
 Standard:Gold Flash all over
 Note:
 Duplex Plating: Gold Plated on contact area,
 Tin on solder area
 Insulator Material: Polyester,UL 94V-0
 Standard: Nylon-6T
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FK-D50T22-2Xxx-LF

SERIES
 LEADFREE
 2X03:06WAY
 2X40:80WAY
 TERMINAL 2.25mm
 HIGH 5.0mm
 DIP 180°

DESCRIPTION: