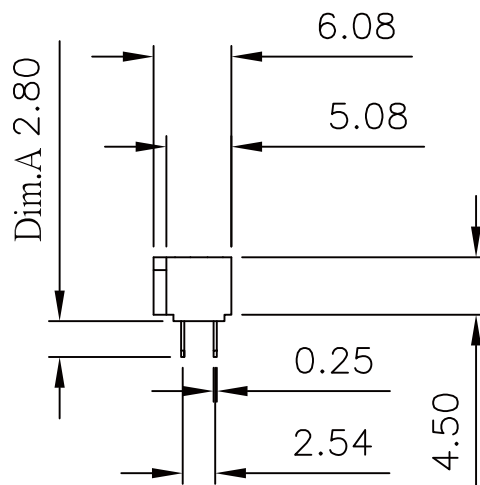
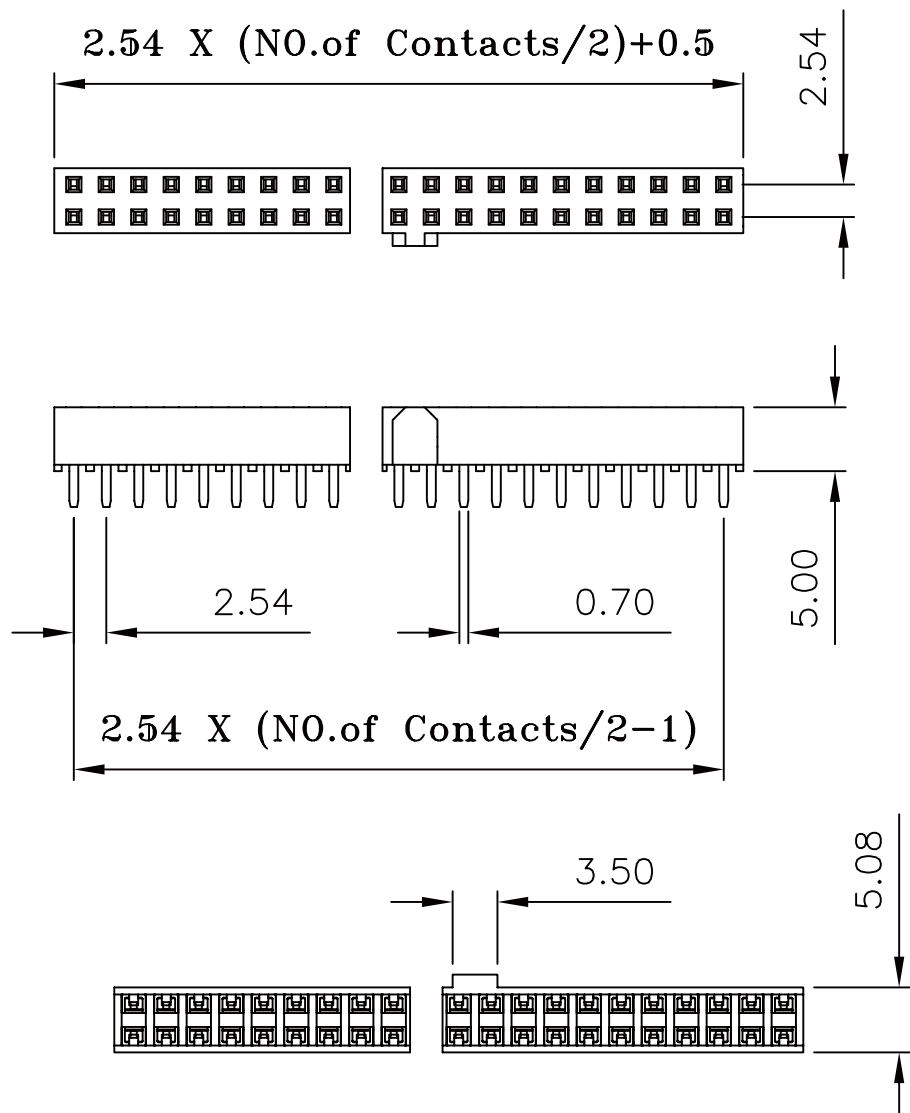



Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: - 40° ~ +85° C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester,UL 94V-0
 Standard: PBT

Finish: Tin,Gold Plated
 Standard:Gold Flash all over

Note:
 Duplex Plating: Gold Plated on contact area,
 Tin on solder area

Insulator Material: Polyester,UL 94V-0
 Standard: Nylon-6T
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds

Recommended P.C. Board
 Hole Layout

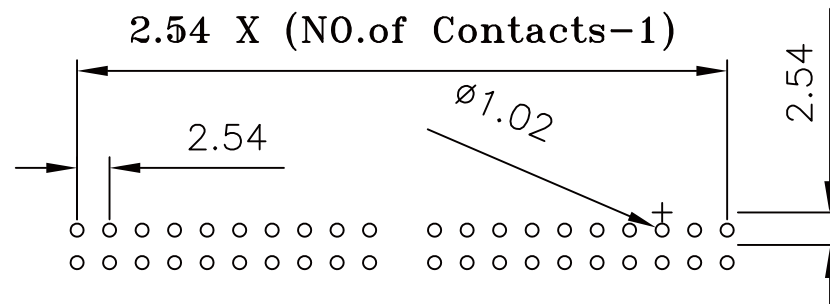

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FK-D50T28-2Xxx-LF

SERIES

LEADFREE

2X03:06WAY

2X40:80WAY

TERMINAL 2.80mm

HIGH 5.0mm

DIP 180°

DESCRIPTION: