
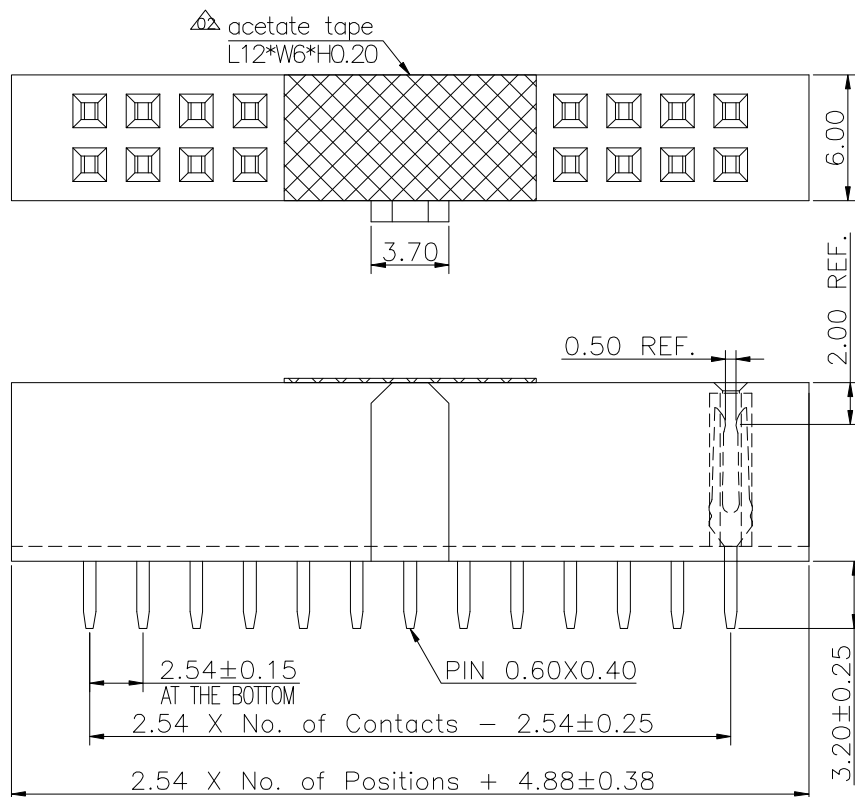


Specifications
 Current Rating:3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:−40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature
 Thermoplastic,UL 94V−0 Nylon (Halogen Free)
 or the equivalent material

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

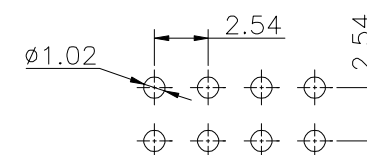

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FK-DKC-2Xxx-LF

SERIES
 LEADFREE
 2X03:06 WAY
 2X36:72 WAY
 MYALR
 KEY
 DIP 180°

DESCRIPTION: 2.54 FEMALE HEADER DUAL ROWS DIP TYPE BASE 8.50H