

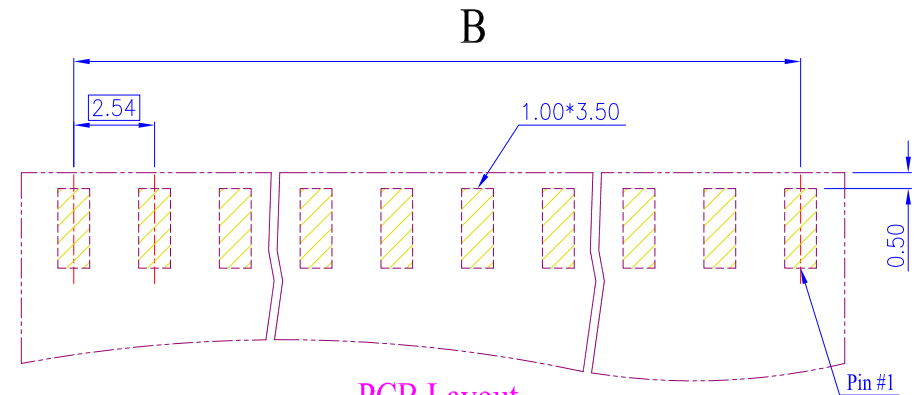
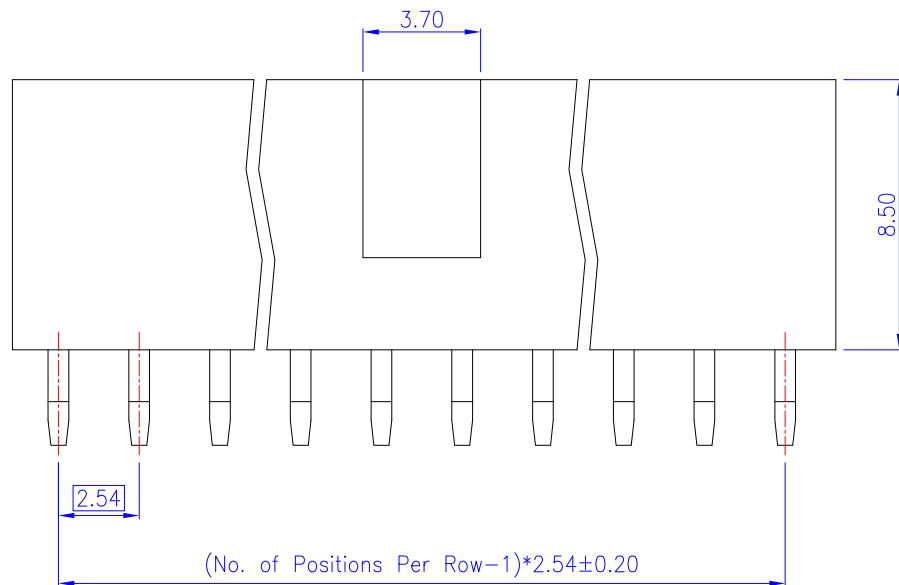


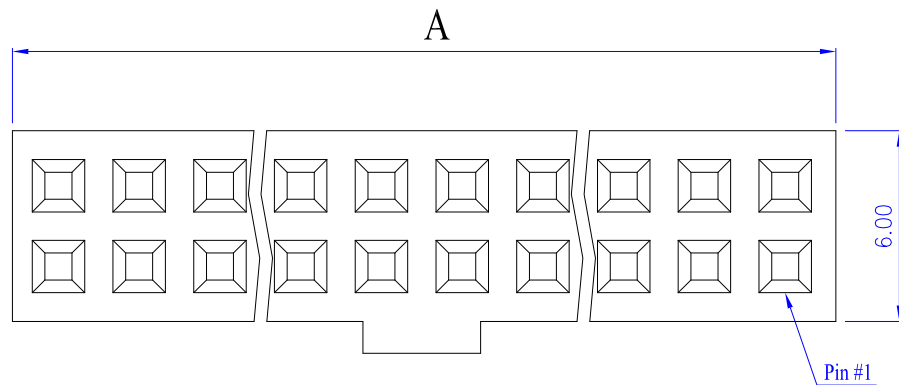

PCB Layout
(Both Sides)

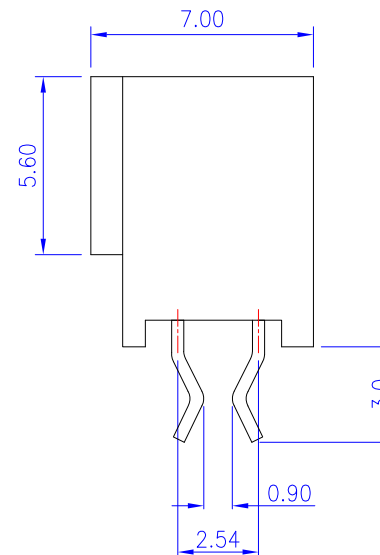

Order Information	Dimension		
	Pos.	A	B
FK-E09-2X04	08	10.66	7.62
FK-E09-2X05	10	13.20	10.16
FK-E09-2X06	12	15.74	12.70
FK-E09-2X07	14	18.28	15.24
FK-E09-2X08	16	20.82	17.78
FK-E09-2X10	20	25.90	22.86
FK-E09-2X12	24	30.98	27.94
FK-E09-2X13	26	33.52	30.48
FK-E09-2X15	30	38.60	35.56
FK-E09-2X17	34	43.68	40.64
FK-E09-2X20	40	51.30	48.26
FK-E09-2X25	50	64.00	60.96
FK-E09-2X32	64	81.78	78.74

Material and Finish

- Housing: Thermoplastic (UL94V-0), Black.
- Terminal: Copper Alloy ($\tau=0.40\text{mm}$), Gold Plating.

Electrical Characteristics

- Current Rating: 3.0 Amp. Max..
- Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
- Insulation Resistance:
1000M Ohms Min. at 1000V DC.
- Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

- Operating Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

FK-E09-2Xxx-LF
SERIES LEADFREE
2X04:08 WAY
2X32:64 WAY
EDGE CLIP 0.9mm

DESCRIPTION: 2.54mm Post Header Receptacle
PCB Straddle Mount Type (0.90mm) Dual Rows, With Short Key (W=6.00mm)