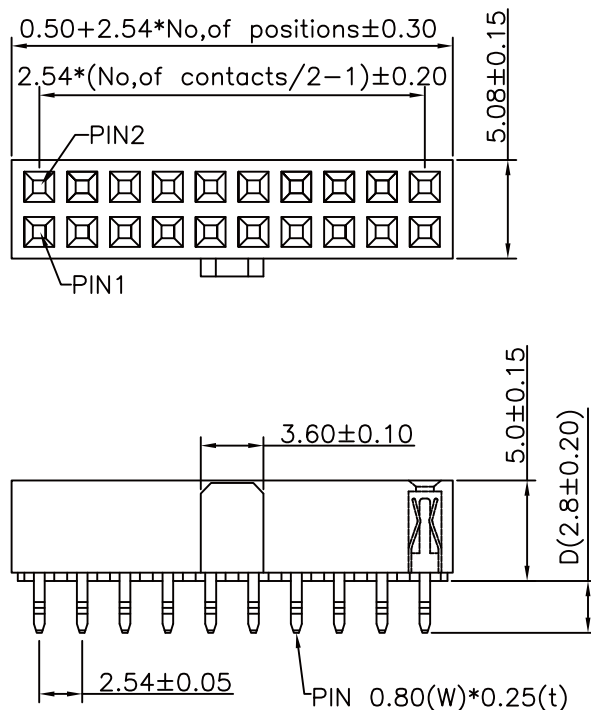


P.C.B LAYOUT

Specifications

current Rating	:3Amps
Insulator Resistance	:5000Megohms Min
contact Resistance	:20mohms max.
Dielectric Withstanding	:Ac1000v
Operating Temperature	:-40°C~+105°C
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester,UL94V-0
Standard	:NYLON-6T
Finish	:Tin,Gold or Duplex plated
standard	:Gold Flash all over

NOTE:

Duplex plating :Gold Plated on contact area,
Tin on solder area

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FK-E10T28-2Xxx-LF
SERIES LEADFREE
2X03:06WAY
2X40:80WAY
TERMINAL 2.80mm
EDGE 1.0mm

DESCRIPTION: 2.54mm Female Header Straddle Dual Row H 5.0 (防呆有倒角)