

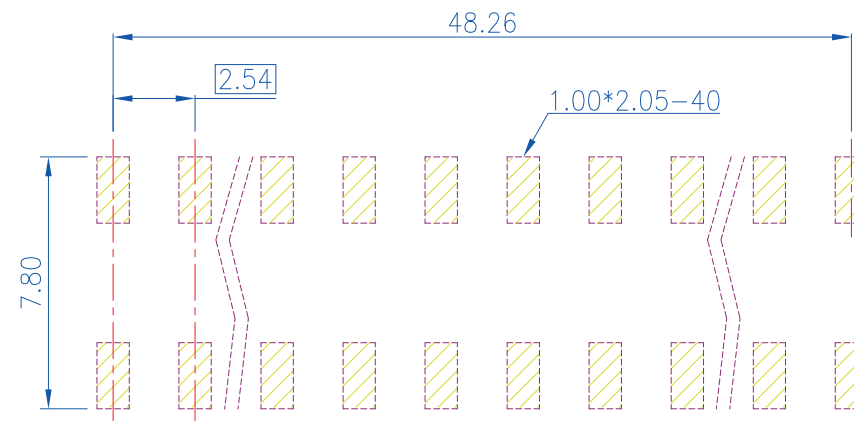
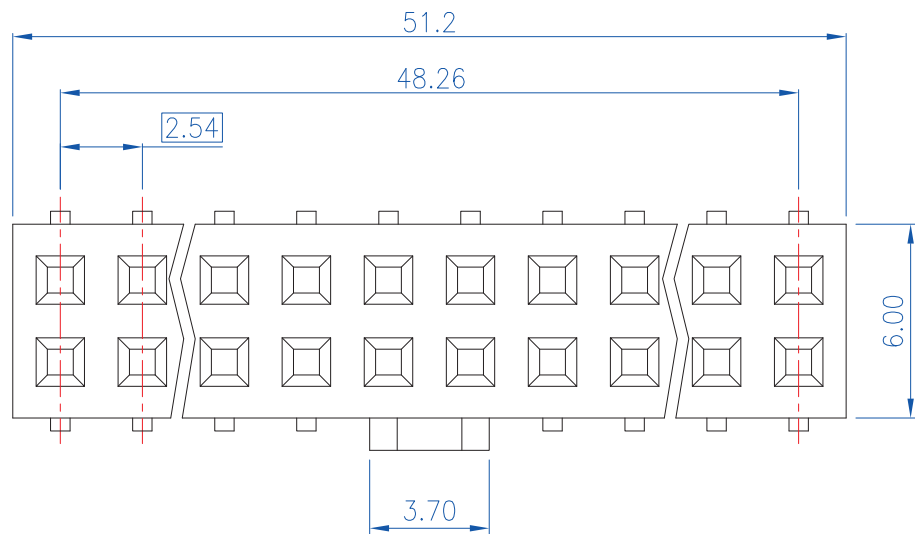


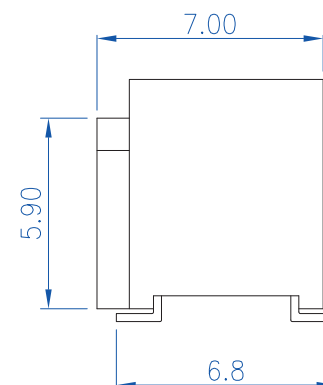

PCB Layout
(Top View)

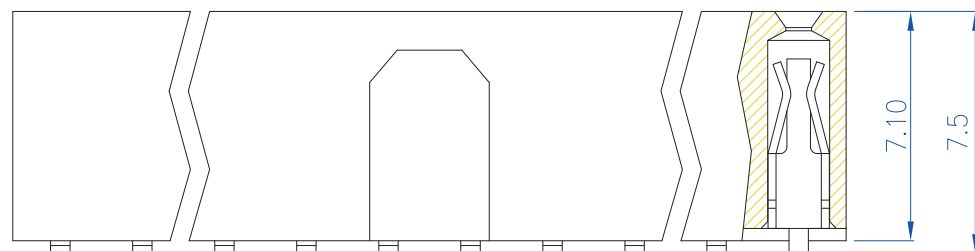

Material and Finish

1. Housing: Nylon 6T (UL94V-0), Black.
2. Terminal: Copper Alloy (t=0.25mm), Gold Plating.

Electrical Characteristics

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage:
1000V AC RMS for 60Seconds.
3. Insulation Resistance:
1000M Ohms Min. at 1000V DC.
4. Contact Resistance: 30m Ohms Max.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FK-V75X-2X20-LF
SERIES LEADFREE
40WAY
NON POST
HIGH 7.5mm
180°SMT

DESCRIPTION: 2.54mm Post Header Receptacle PCB Surface Mount Type
(H=7.10mm) Without Post, Dual Rows 40P, With Key (W=6.00mm)