


Recommended P.C. Board

SMD Layout

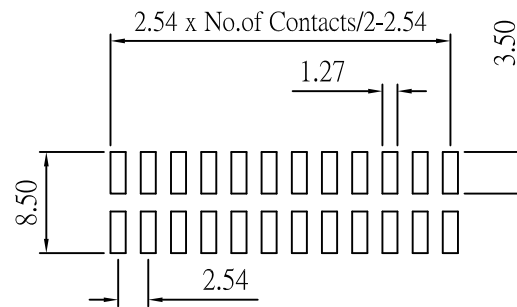

Current Rating Voltage: 3 Amps 250V AC (r.m.s)

Insulator Resistance: 5000 Megohms min

Contact Resistance: 20 m ohms max.

Dielectric Withstanding: 1000 V AC

Operating Temperature: - 40° ~ +105° C

Contact Material: Copper Alloy

Insulator Material: Polyester, UL 94V-0

Standard: PBT



Finish: Standard: Gold Flash all over

Insulator Material: High Temperature

Polyester, UL 94V-0

Max Processing Temp: 230° C for 60 seconds

Max Processing Temp: 260° C for 10 seconds

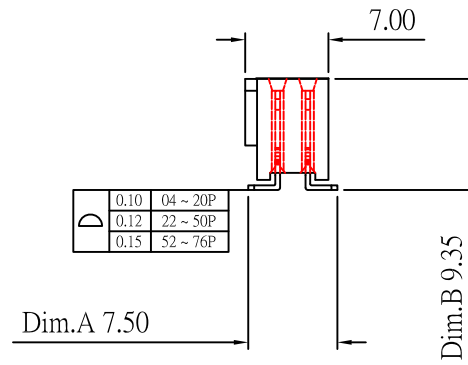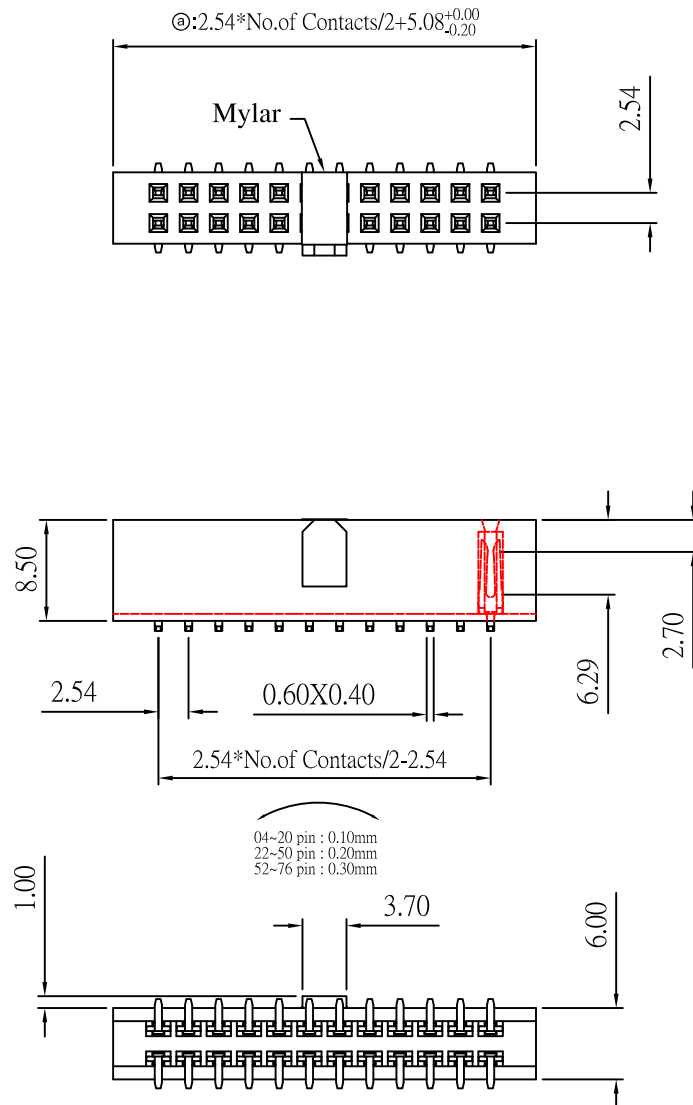

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FK-VK93XC-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X38:76WAY
180°SMT MYLAR
KEY NON POST
HIGH 9.35mm

DESCRIPTION: