

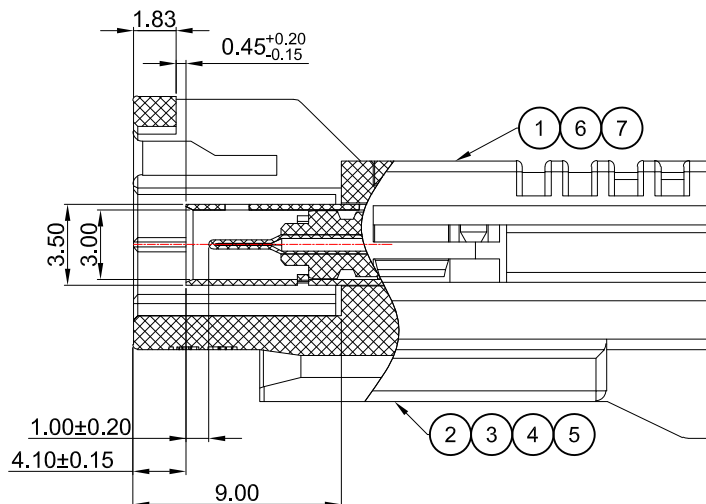
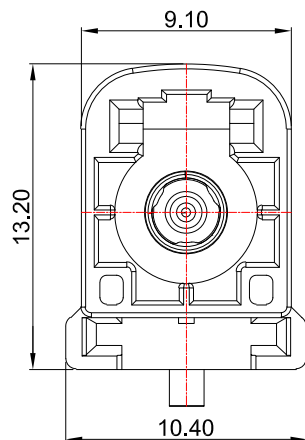
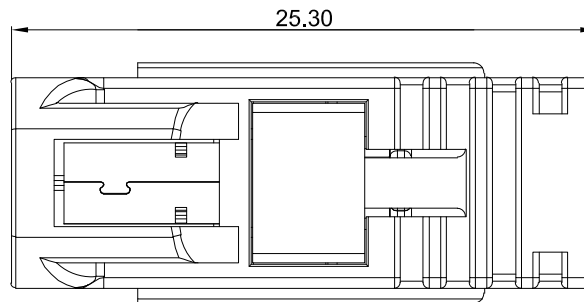


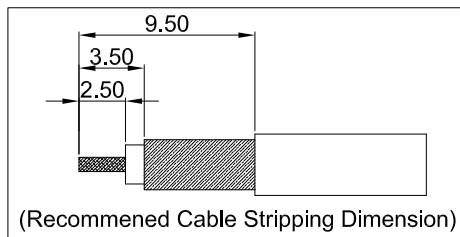

7	Crimp	Brass, Ni Plated	1
6	Terminal	Phosphor Bronze, Contact 3u" Gold Plated	1
5	Insulator	PA, Signal Green	1
4	Crimp	Phosphor Bronze, G/F Plated	1
3	Crimp	Phosphor Bronze, Ni Plated	1
2	Stopper	Zinc, Yellow	1
1	Housing	PA	1
No.	Part Name	Specifications	Q'ty



Notes:

1. Impedance : 50 Ω
2. Frequency Range : DC-6 GHz
3. VSWR(Return Loss) : 25dB, DC to 3 GHz
20dB, DC to 6 GHz
4. D.W.V. : 750 VRMS, Min.
5. Center Contact Resistance : 24mΩ Max.
6. Out Conductor Resistance : 5mΩ Max.
7. Mating Cycles : 25 Cycles Min.
8. Engagement Force : 15N Max.
9. Disengage Force : 5N Min.
10. Retention Force Latch : 110N Min.
11. Coding Efficiency : 150N Min.
12. Operating Temperature : -40°C~+105°C

Port Type			
No.	BK	WH	BL
顏色	黑色	白色	藍色
Port Type			
No.	PR	GR	BR
顏色	酒紅紫色	綠色	棕色
Port Type			
No.	WB		
顏色	水藍色		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FKM-PH-1X1xx-LF
SERIES T LEADFREE
BK.WH.....WB
01 WAY
HOUSING
MALE

DESCRIPTION: Mini FAKRA, Male Type