



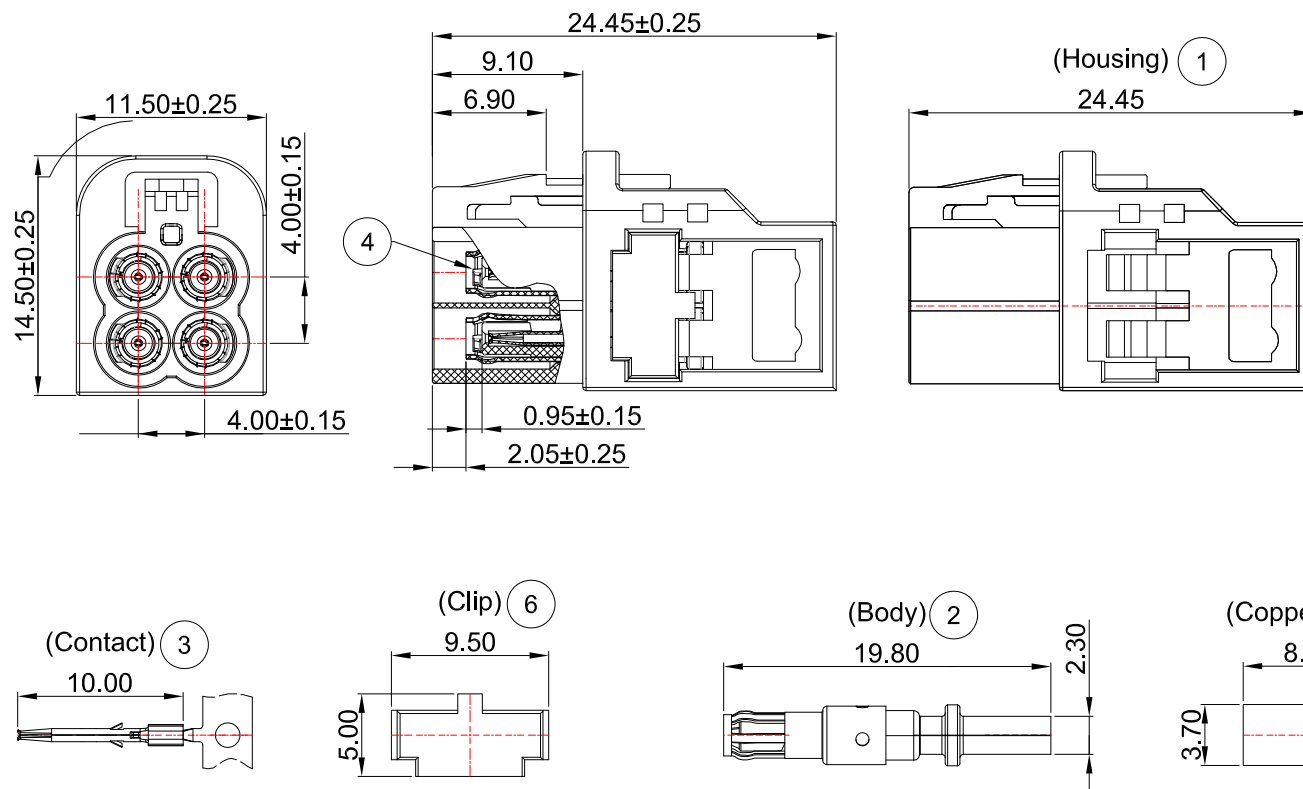

Notes:

1. Impedance : 50 Ω
2. Frequency Range : DC-6 GHz
3. Mating Cycles : 25 Cycles Min.
4. Retention Force Latch : 110N Min.
5. Operating Temperature : -40°C~+105°C

Port Type			
No.	BK	WH	BL
顏色	黑色	白色	藍色
Port Type			
No.	PR	GR	BR
顏色	酒紅紫色	綠色	棕色
Port Type			
No.	WB		
顏色	水藍色		



6	Clip	PBT, Yellow	2
5	Copper Pipe	Copper, Ni Plated	4
4	Insulator	PPO, Brown	4
3	Contact	Copper, G/F Plated	4
2	Body	Copper, Ni Plated	4
1	Housing	PBT	1
No.	Part Name	Specifications	Q'ty

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FKM-SH-2X2xx-LF
SERIES | LEADFREE
BK.WH.....WB
04 WAY
HOUSING
FEMALE

DESCRIPTION: Mini FAKRA, Female Type