


NOTES: TYPICAL SPECIFICATIONS

1.0. ELECTRICAL DATA

- 1.1. FREQUENCY RANGE --- DC ... 4 GHz
- 1.2. IMPEDANC --- 50 Ohms
- 1.3. VSWR --- < 1.42
- 1.4. DIELECTRIC WITHSTANDING VOLTAGE --- 750 Vrms
- 1.5. INSULATION RESISTANCE --- 1000 Mega-Ohms
- 1.6. CENTER CONTACT RESISTANCE --- 8.0 mini-Ohms
- 1.7. OUTER CONTACT RESISTANCE --- 6.0 mini-Ohms

2.0. MECHANICAL DATA

- 2.1. COUPLING METHOD --- SNAP-ON
- 2.2. DURABILITY (MATING/UNMATING) --- 100 Cycles
- 2.3. ENGAGEMENT FORCE --- 25N max.
- 2.4. DISENGAGEMENT FORCE --- 2N min.

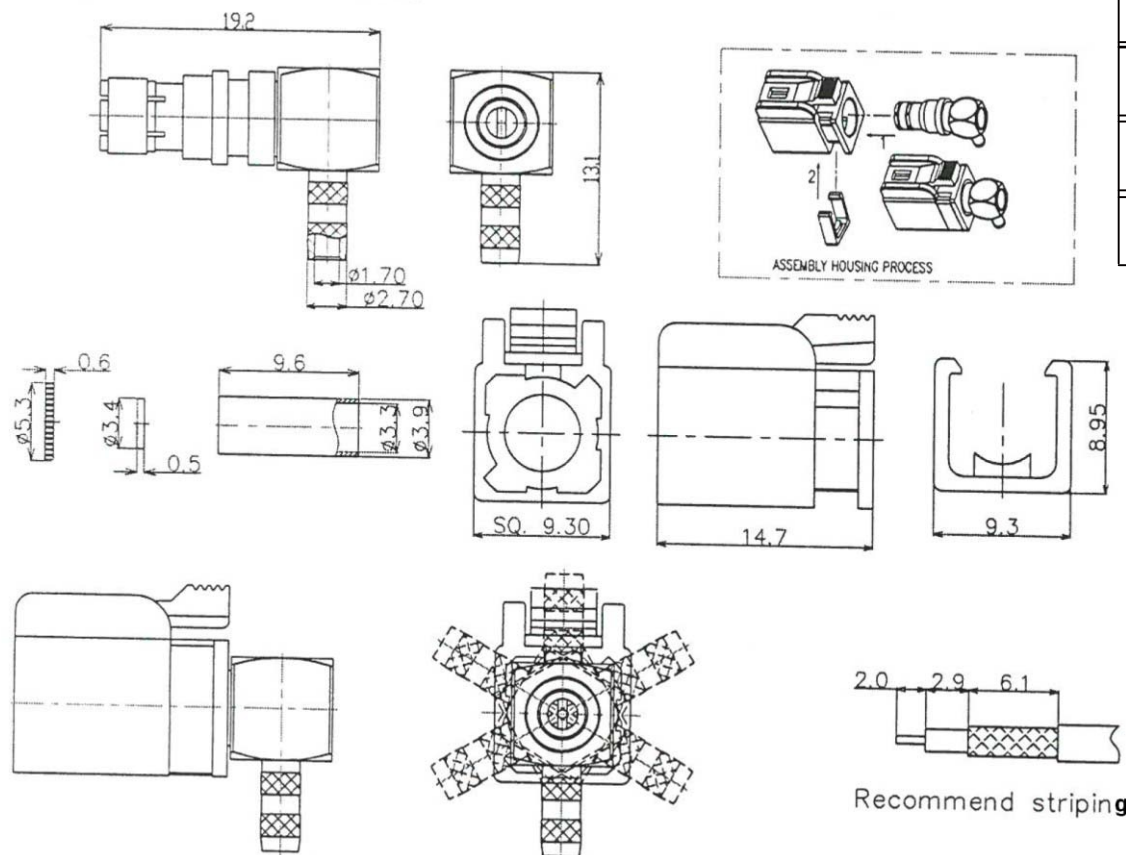

CODE REFERENCE CHART

A	BK		Black 9005 Radio without phantom supply	CODE		
				Violet 4003 GPS for telematics and navigation	PP	H
B	WH		Cream white 9001 Radio phantom supply	Beige 1001 Remote control parking heating	BG	I
C	BL		Blue 5005 GPS	Curry 1027 Radio with IF	CR	K
D	PR		Bordeaux 4004 GSM cellular phone	Carmine red 3002 Not defined	RD	L
E	GR		Green 6002 TV1 / SDARS	Pastel orange 2003 Not defined	PO	M
F	BR		Brown 8011 TV2 / SDARS	Pastel green 6019 Not defined	PG	N
G	GE		Grey 7031 Remote control keyless entry	Water blue 5021 Neutral coding	WB	Z

ITEM	ITEM NAME	MATERIAL	FINISH	Q'TY/EA
9	CAP	BRASS	NICKEL	1
8	OUTER INSULATOR	TEFLON		1
7	HOUSING	NYLON	By Code Color	1
6	C-RING	SK-5	NICKEL	1
5	LOCK RING	NYLON	By Code Color	1
4	SLEEVE	BRASS	NICKEL	1
3	FEMALE INSULATOR	TEFLON		1
2	FEMALE CONDUCTOR	Phosphor Bronze	GOLD	1
1	BODY	BARSS	NICKEL	2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FKSMB-PCRxx-174-LF

SERIES

PLUG

CRIMP

RG 174

BK:BLACK

WH:WHITE

90°

LEADFREE

DESCRIPTION: FAKRAJACK R/A FOR RG-316/174