

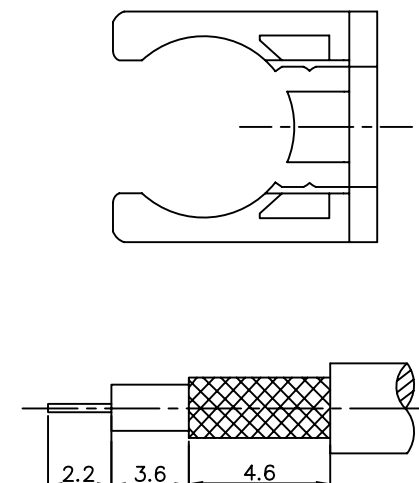
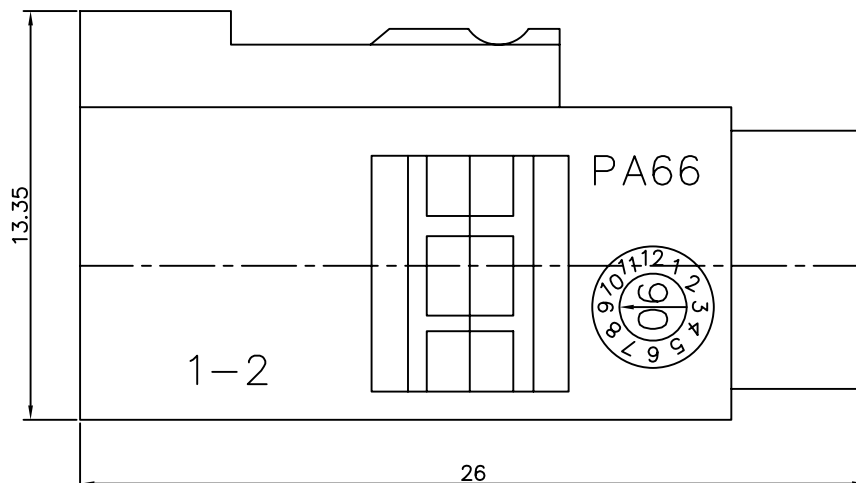
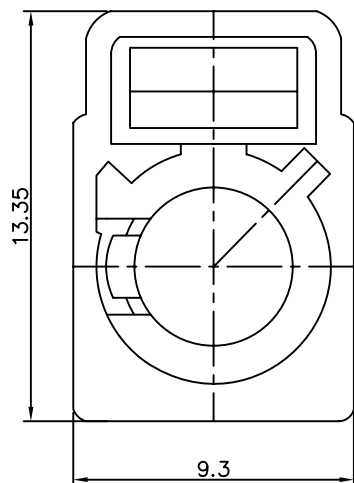



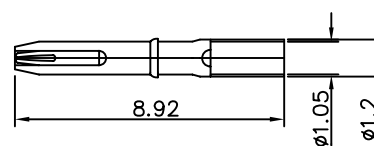

RECOMMENDED CABLE
STRIPPING DIMENSIONS

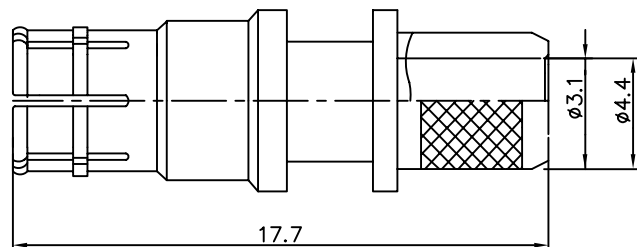

6	CUP	PA66	BLUE	1
5	SHELL	PA66	WHITE	1
4	FERRULE	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	WHITE	1
1	BODY	BRASS	NICKEL	1
ITEM	DESCRIPTION	MATERIAL	FINISH	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

0.5-6=±0.2
6-30=±0.4
30-120=±0.6
120-315=±1.0
ANGLES=±1°

照片框

ORDER INFORMATION

FKSMB-PCWH-58-LF

SERIES

LEADFREE

RG58

WHITE

CRIMP

MALE

DESCRIPTION: FAKRA SMB STR CRIMP JACK-50 OHM (FOR RG-58 /U,58C /U)