




Specifications

1. MATERILA

Housing PA9T+30%G.F UL94V-0 Color Black
Contact Brass GOLD FLASH PLATING OVER ALL
30u" NICKEL UNDERPLATING OVER ALL

2. characteristics

Raring Current 3AMP
Contact Resistance 20MΩ MAX.
Insulating Resistance 1000MΩ MIN.
WithstWanding Voltage AC 500V/Minute.
Temperture Range -40_° to +105_°

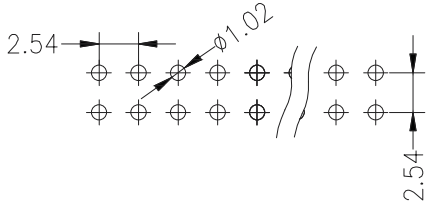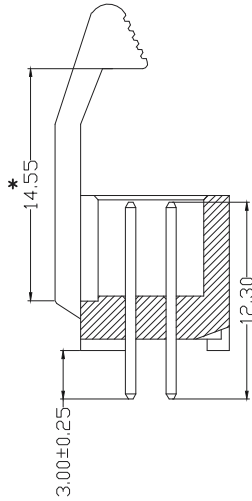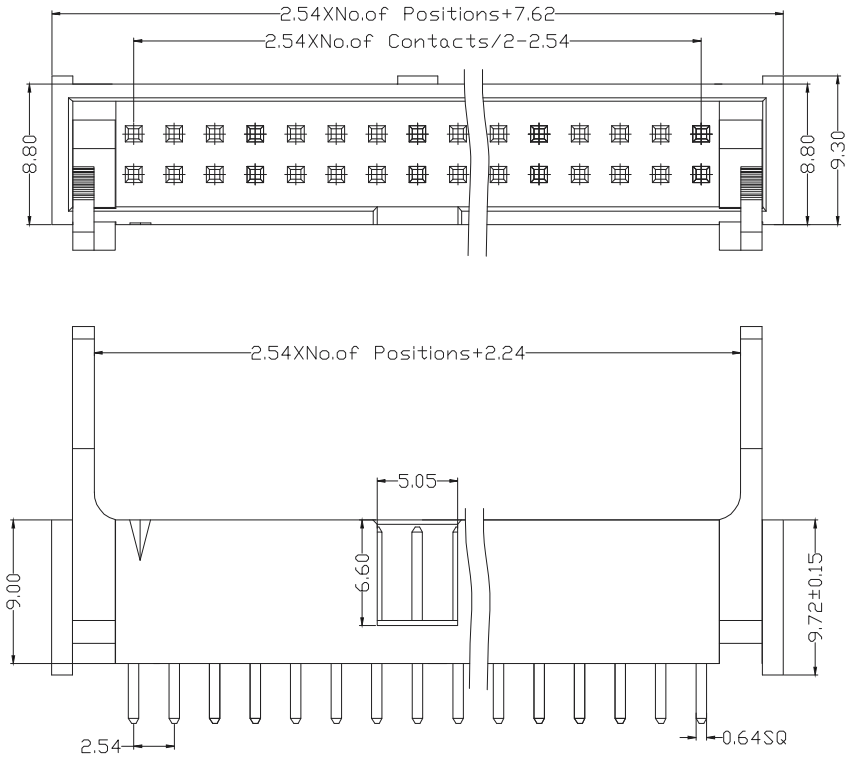

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

FLM-DG-xx-LF
SERIES | T | LEADFREE
08~40WAY
GOLD
DIP 180°

DESCRIPTION: 2.54筒牛側面帶鐵鉤 DIP 180度