


1. DIMENSION-1

Unless otherwise specified all
Dimensions in millimeters &
inches. Values in brackets
are inches equivalents.

FRACTIONS $\pm 4/10$
REMOVE BURRS & SHARP EDGES .250 MAX
MACHINE FILLET RADIUS .250 R MAX
ALL DIAS. TO BE CONCENTRIC
WITHIN .125 T.I.R.
INTERPRETATION PER MIL STD
8 10 & 12

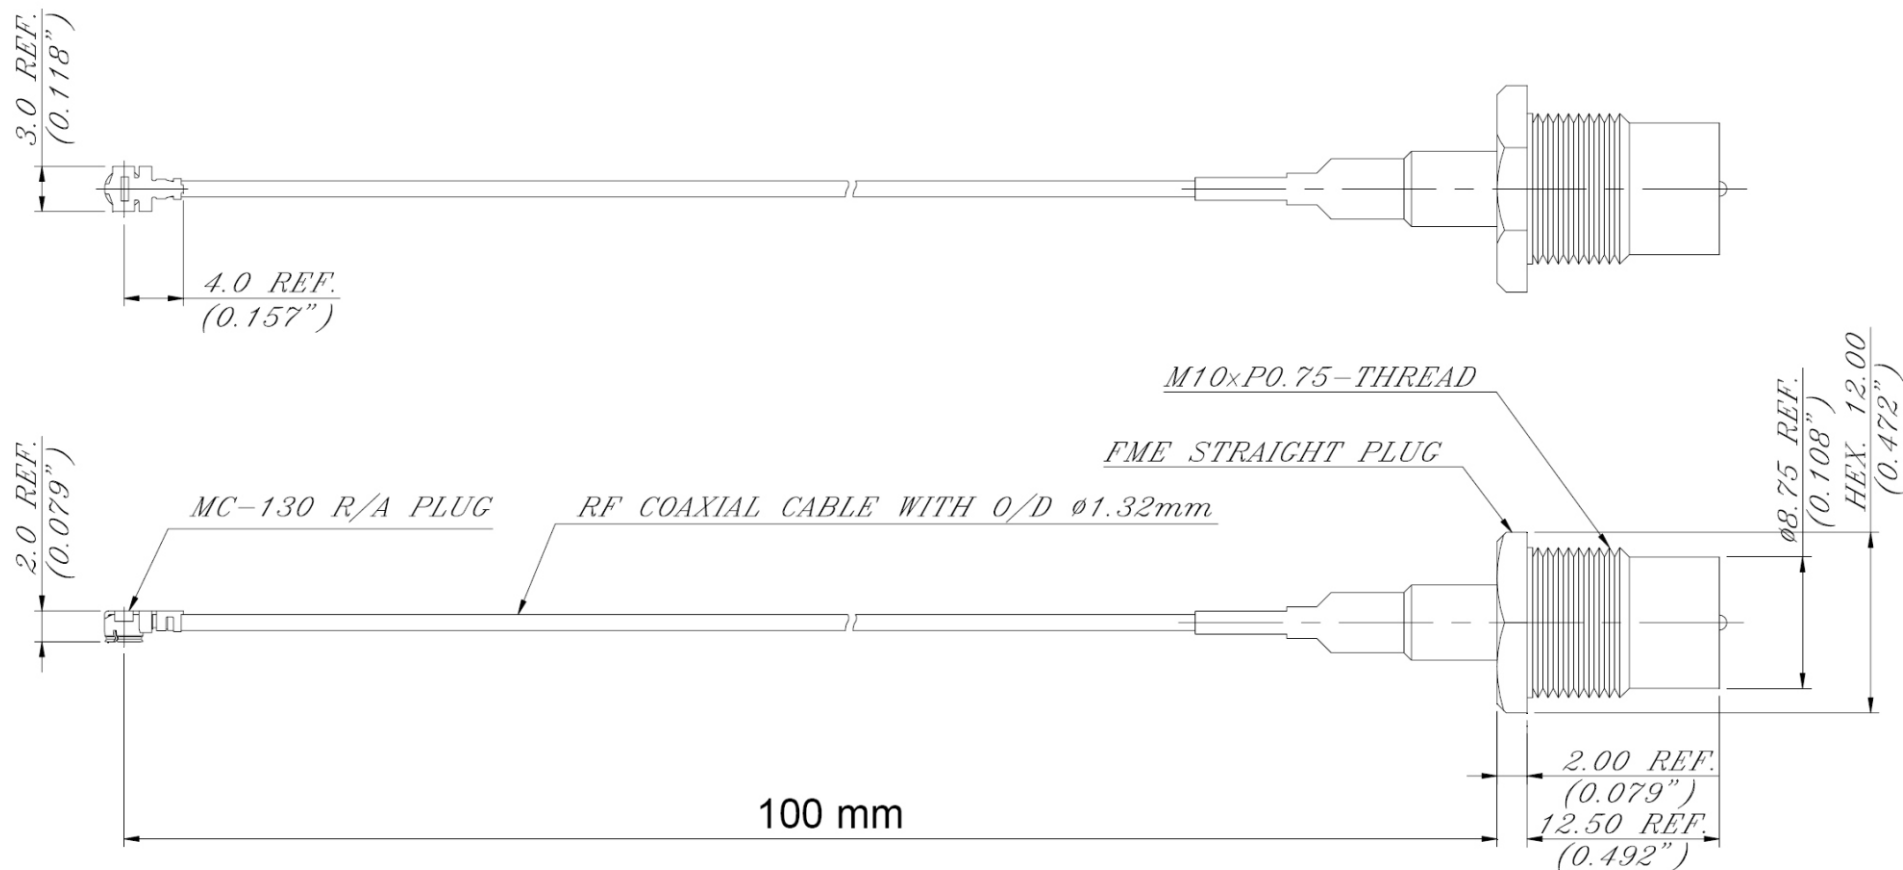

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
X. ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FMEMHF-1S1R132PB-M10C-LF

SERIES

LEADFREE

100mm

MALE TO MALE

PANEL BACK

1.32 DIA CABLE

ST/RT

DESCRIPTION: MC-130 TO FME STRAIGHT PLUG CABLE ASS'Y FOR O/D Ø1.32mm COAXIAL CABLE