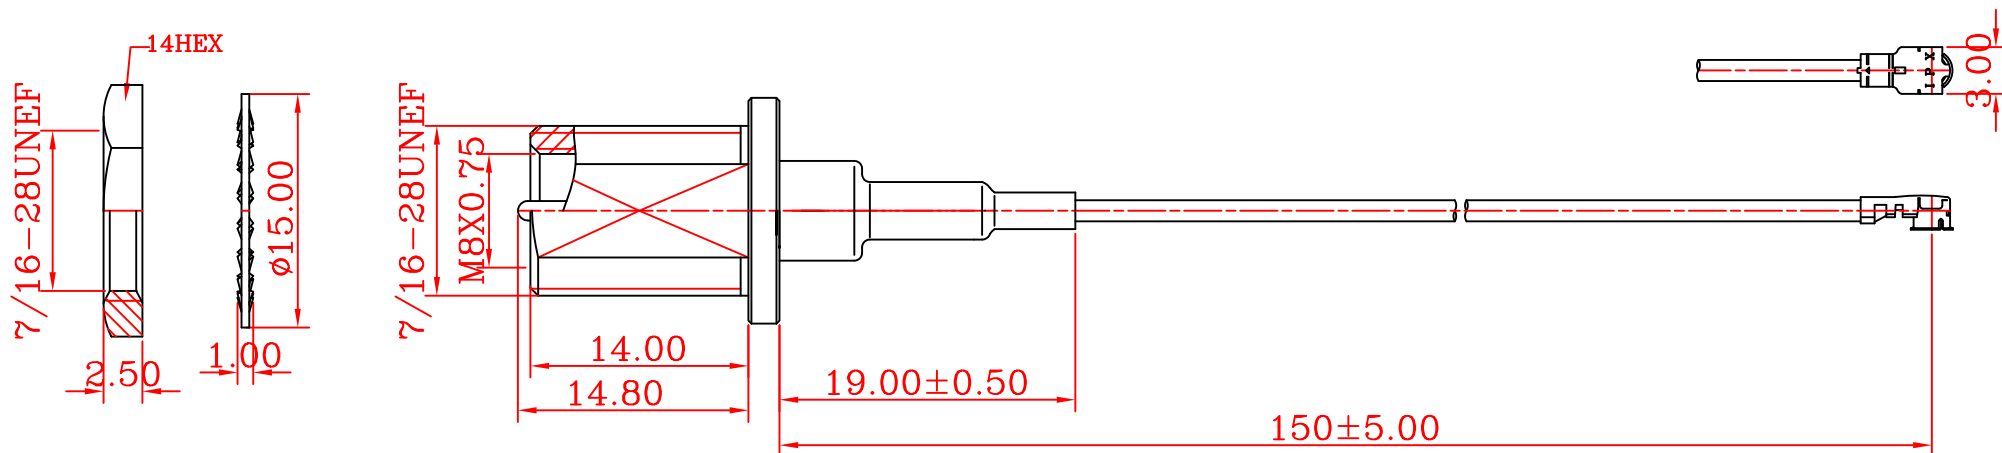


NOTE1:CABLE SPECIFICATION:(ϕ 1.37mm CABLE)	
CONDUCTOR	0.30 Silver-Coated copper
INSULATOR	0.86 FEP
BRAID SHIELD	1.15 Tinned-Coated copper
JACKET	1.37 FEP(BLACK)

4	IPEX CONNECTORS (GOLD PLATED)
3	FILOTEX CABLE (SEE NOTE1)
2	THE SHRINK TUBE GLUED WITH ADHESIVE COLOR: BLACK
1	FME PLUG BULKHEAD CRIMP FOR 1.37 CABLE (NICKEL PLATED)
	WASHER_1:IRON, NUT_1:ZINC
	BODY:BRASS, RAER BODY:BRASS, INSULATOR:POM
	CONTACT PIN:BRASS
ITEM	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

0.5-15 = ± 0.20
 15-30 = ± 0.40
 30-120 = ± 0.60
 >120 = ± 1.00

ANGLES
 $\pm 5^\circ$

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

FMEUFL-1S1R137PBNW-M15C-LF

SERIES

ST/RT

RG137

PANEL BACK

NUT+WASHER

MALE TO MALE

150mm

LEADFREE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: FME PLUG BULKHEAD TO I-PEX CONNECTORS (WITH 1.37 CABLE)