


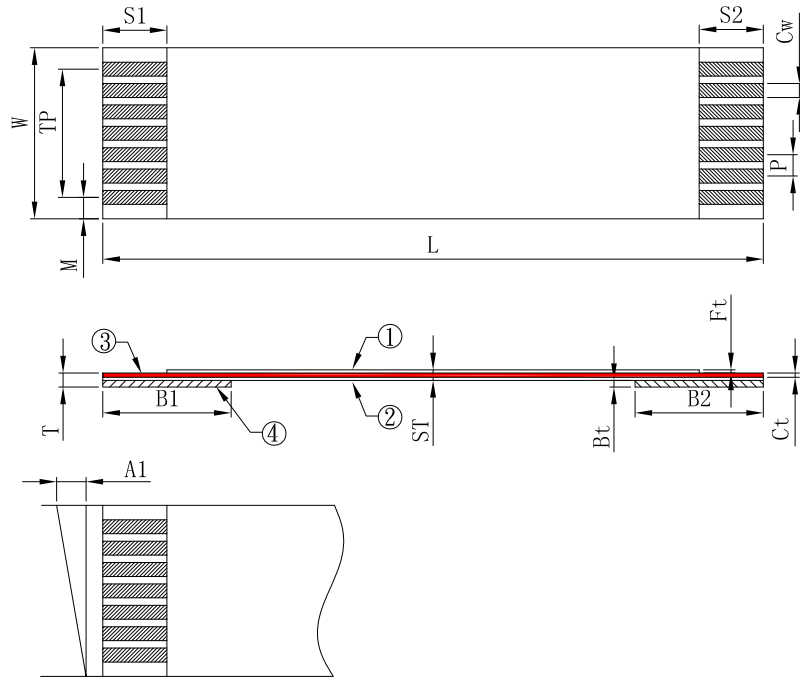

Symbol 标号	Item 项目	Specification 规格
N	No. of Conductors(导体芯数)	9
P	Pitch(间距)	1.0±0.10
TP	Total Pitch(总间距)	8.0±0.15
W	Width(总宽度)	10.0±0.15
M	Margin(边缘宽度)	1.0±0.15
L	Total Length(总长度)	305±5
T	Insertion Thickness(插入厚度)	0.303±0.05
ST	FFC Body Thickness(线身厚度)	0.121±0.03
S1/S2	Conductor Strip Length(裸铜长度)	4/4±1.0
B1/B2	Supporting tape Length(补强板长度)	10/10±2.0
Cw	Conductor Width(导体宽度)	0.65±0.03
Ct	Conductor Thickness(导体厚度)	0.035±0.005
Ft	Insulation Film Thickness(绝缘膜厚度)	0.043±0.005
Bt	Supporting tape Thickness(补强板厚度)	0.225±0.005
A1	Slanting(线口倾斜度)	<0.5

ELECTRICAL CHARACTERISTICS

Conductor Resistance: JISC-3102(at20℃) 2.20Ω/M Max.
Insulation Resistance: Apply the voltage of DC 500V
for one minute 100MΩ Min.
Dielectric Strength: Apply AC 500V for one minute.
Continuity Test: Apply microtest machine No Open/Short
Rated voltage & temperature:UL20624 60V 80℃

Material

Insulation: Flame Retardant Polyeste
Color: White
Conductor: Copper with 1u m min.tin-Plating
Supporting Tape: Flame Retardant Polyester
Color: Blue

包装方式:线材每50PCS两端用纸带包好,6把装1PE袋(需整齐排好),
然后把装好1PE袋的产品用纸板固定好,7袋装一纸箱.
批量不够2100PCS可自行选择合适纸箱

包材	C型纸箱 K=K 15.7"*13.3"*8.6" 环保ROHS	1/2100	PCS	GC01
	PE袋 12"*17" 有环保标示 环保ROHS	1/300	PCS	XHSL
	纸板A=A 14.9"*12.1" 环保ROHS	1/300	PCS	GC01
	纸带 15*0.1" 环保ROHS	0.000006	Kg	HY08
4	FFC-ST-0.225*20 环保ROHS	10	mm	LR00
3	FFC-CN-0.035*0.65 环保ROHS	0.5551693875	g	MX00
2	FFC-FD-0.043*120 环保ROHS	W=10 L=305	mm	XSD0
1	FFC-FM-0.043*120 G-NS 环保ROHS	W=10 L=297	mm	XSD0
序号	品 名/规 格	用量	单位	代码

FPA-CA09-305-LF
LEADFREE
RoHS Compliant

B	 CONNECTORS ASSEMBLIES		PART NO. FPA-CA09-305									
			DWG NO. FPA-CA09-305	CHECKED BY CY	TOLERANCES ARE .X ± .XX ± .XXX ± AWG	DESCRIP TION:						
A	煜倫股份有限公司		FILE NO.					DRAWING BY		AREA	REVISIONS	HK
			UNIT / mm	SCALE 1:1	PROJECTION 