


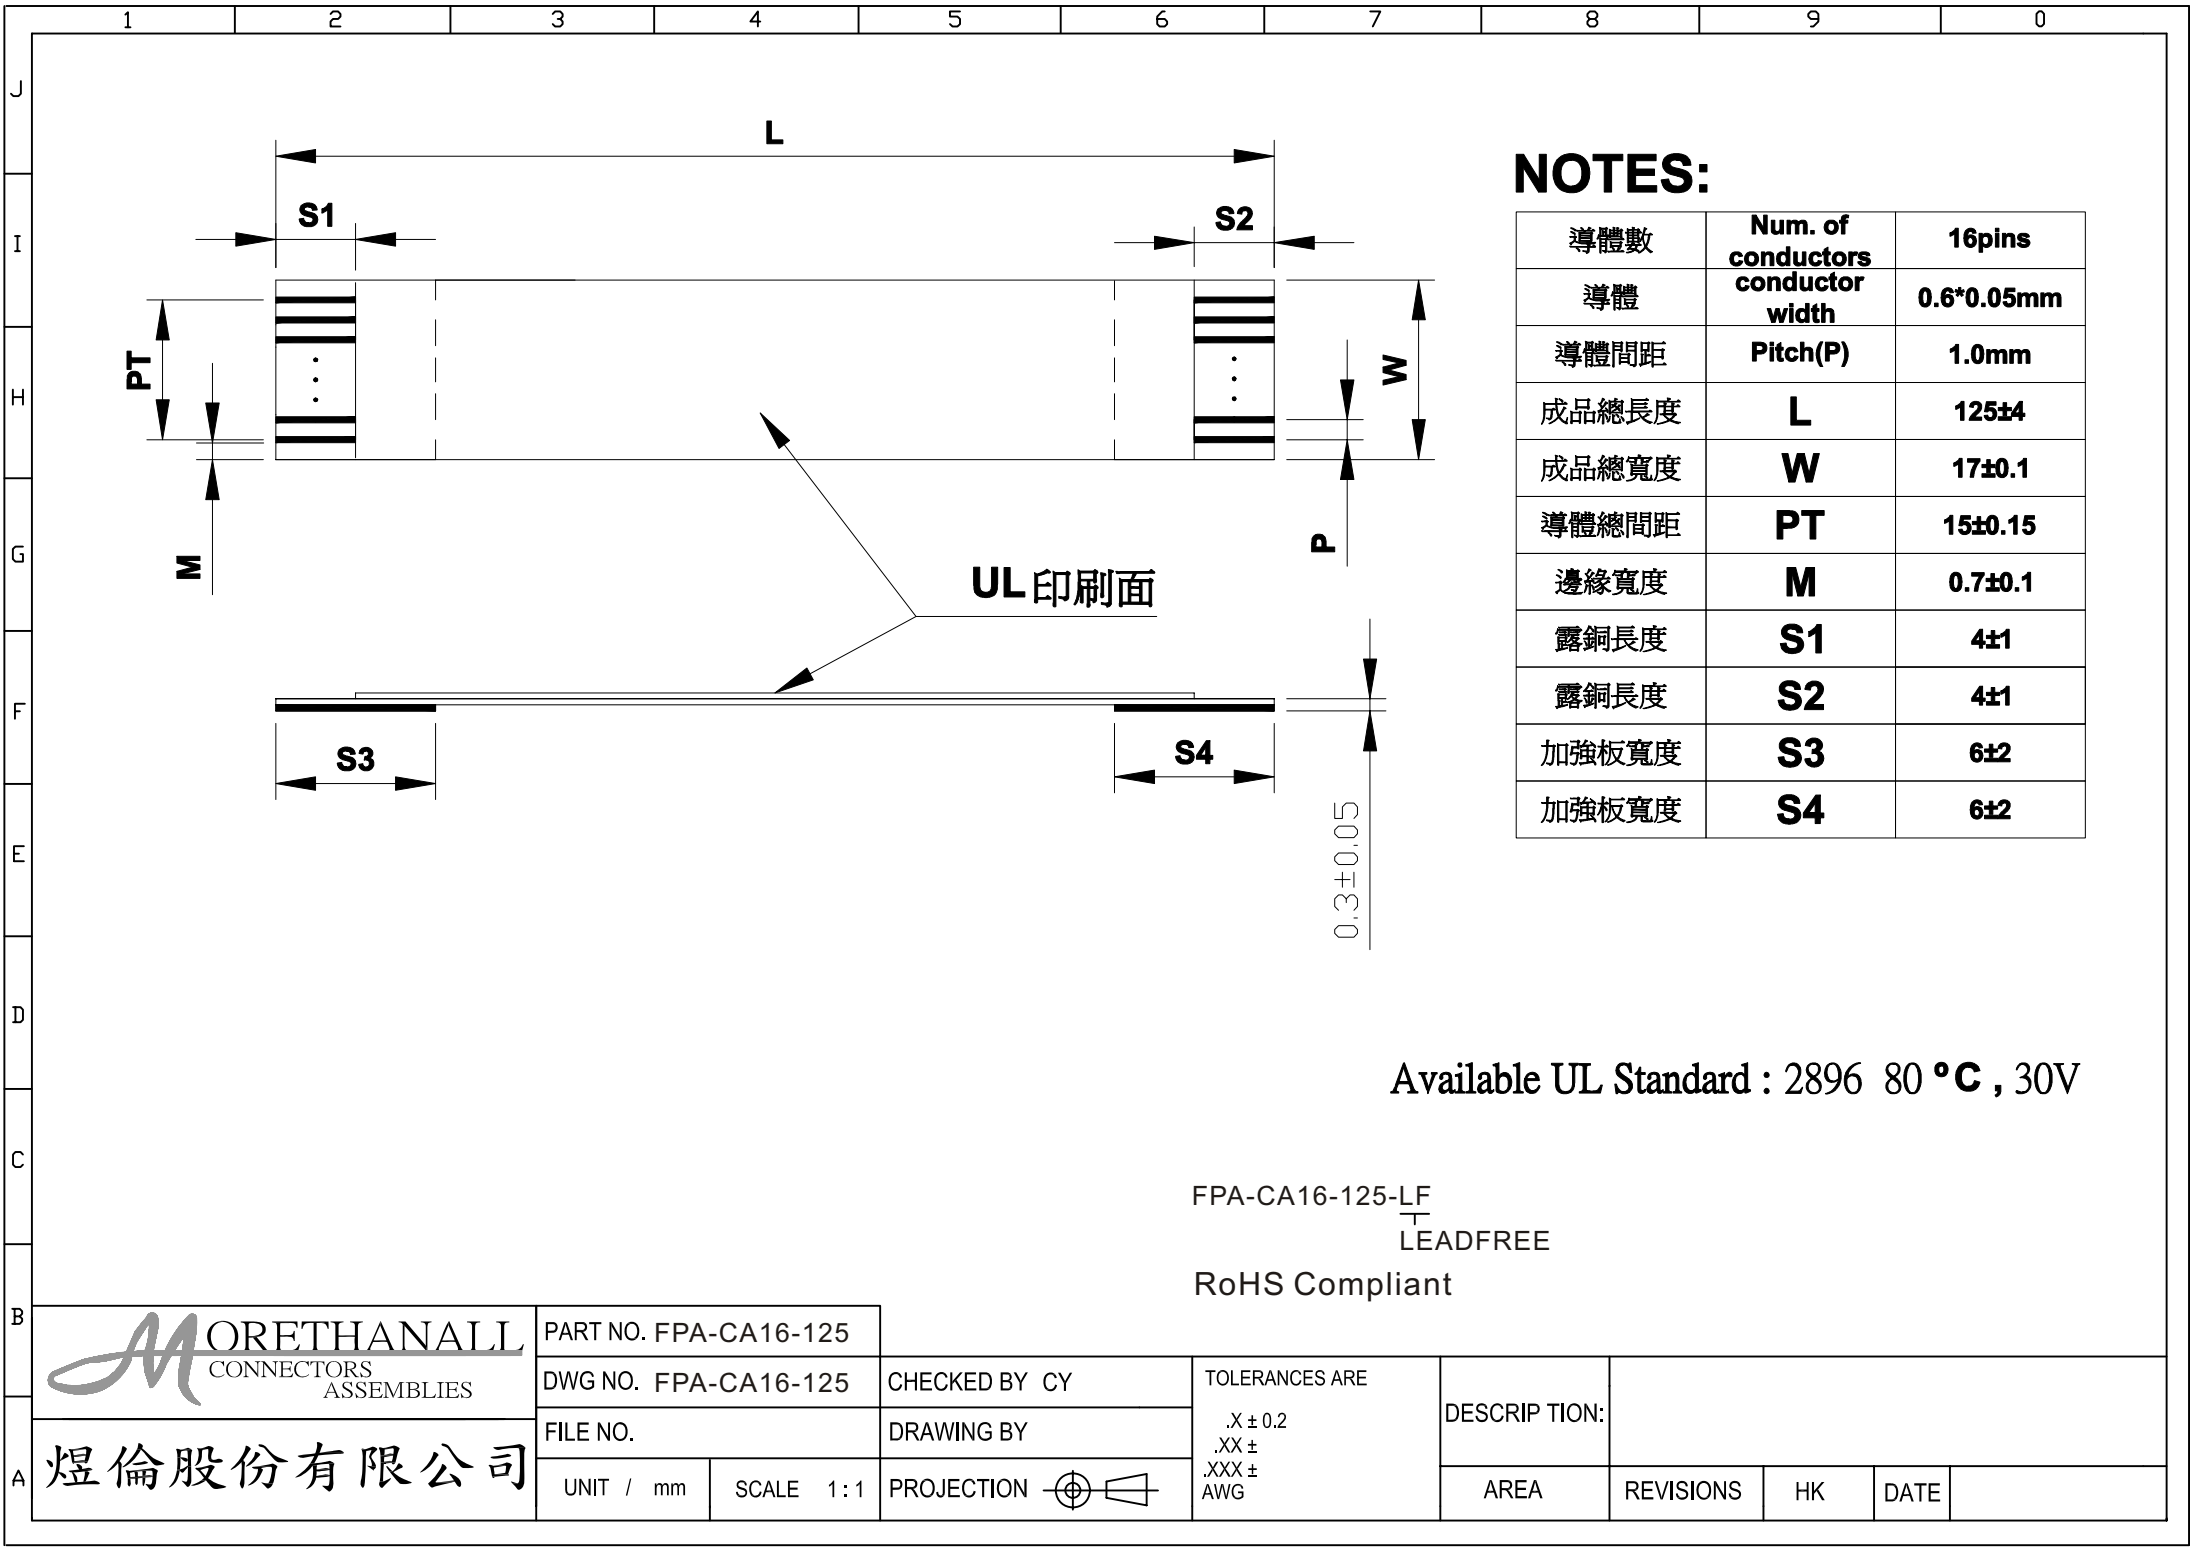

NOTES:

導體數	Num. of conductors	16pins
導體	conductor width	0.6*0.05mm
導體間距	Pitch(P)	1.0mm
成品總長度	L	125±4
成品總寬度	W	17±0.1
導體總間距	PT	15±0.15
邊緣寬度	M	0.7±0.1
露銅長度	S1	4±1
露銅長度	S2	4±1
加強板寬度	S3	6±2
加強板寬度	S4	6±2

Available UL Standard : 2896 80 °C , 30V

FPA-CA16-125-LF
LEADFREE
RoHS Compliant

 MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. FPA-CA16-125		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:				
	DWG NO. FPA-CA16-125									
	FILE NO.		DRAWING BY			AREA	REVISIONS	HK	DATE	
	UNIT / mm	SCALE 1:1	PROJECTION 							