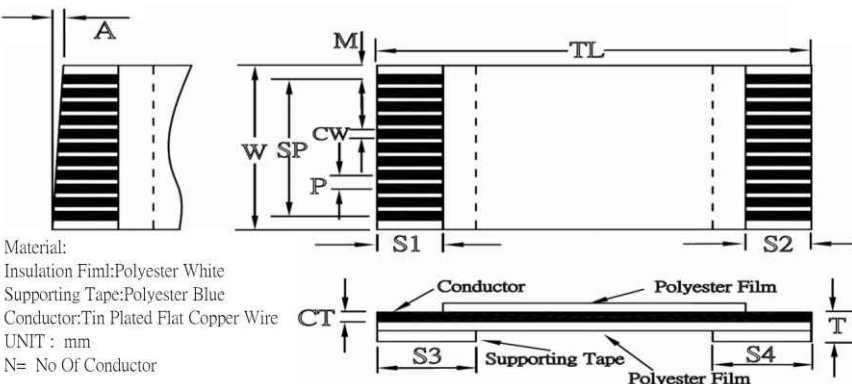





	1	2	3	4	5	6	7	8	9	0																																																															
J																																																																									
I																																																																									
H																																																																									
G																																																																									
F	 Material: Insulation Film:Polyester White Supporting Tape:Polyester Blue Conductor:Tin Plated Flat Copper Wire UNIT : mm N= No Of Conductor <table><tr><th>SYMBOL</th><th>N</th><th>P</th><th>W</th><th>SP</th><th>M</th><th>A</th><th>TL</th><th>T</th><th>S1</th><th>S2</th><th>S3</th><th>S4</th></tr><tr><td>RANGE</td><td>16</td><td>1.0</td><td>17.0</td><td>15.0</td><td>1.0</td><td>0.0</td><td>152.0</td><td>0.3</td><td>4.0</td><td>4.0</td><td>8.0</td><td>8.0</td></tr><tr><td>TOLERANCE</td><td></td><td>±0.10</td><td>±0.15</td><td>±0.15</td><td>±0.15</td><td><0.5</td><td>±2.0</td><td>±0.05</td><td>±1.0</td><td>±1.0</td><td>±2.0</td><td>±2.0</td></tr><tr><td>CONDUCTOR</td><td colspan="2" rowspan="2">TIN PLATED COPPER WIRE (TIN 1~3um)</td><td colspan="2">THICKNESS(Ct)</td><td colspan="2">0.035</td><td colspan="2">±0.005</td><td colspan="4"></td></tr><tr><td>SPECIFICATION</td><td colspan="2" rowspan="5">WIDTH(Cw)</td><td colspan="2" rowspan="5">0.65</td><td colspan="2" rowspan="5">±0.03</td><td colspan="4"></td></tr></table>										SYMBOL	N	P	W	SP	M	A	TL	T	S1	S2	S3	S4	RANGE	16	1.0	17.0	15.0	1.0	0.0	152.0	0.3	4.0	4.0	8.0	8.0	TOLERANCE		±0.10	±0.15	±0.15	±0.15	<0.5	±2.0	±0.05	±1.0	±1.0	±2.0	±2.0	CONDUCTOR	TIN PLATED COPPER WIRE (TIN 1~3um)		THICKNESS(Ct)		0.035		±0.005						SPECIFICATION	WIDTH(Cw)		0.65		±0.03					
SYMBOL	N	P	W	SP	M	A	TL	T	S1	S2	S3	S4																																																													
RANGE	16	1.0	17.0	15.0	1.0	0.0	152.0	0.3	4.0	4.0	8.0	8.0																																																													
TOLERANCE		±0.10	±0.15	±0.15	±0.15	<0.5	±2.0	±0.05	±1.0	±1.0	±2.0	±2.0																																																													
CONDUCTOR	TIN PLATED COPPER WIRE (TIN 1~3um)		THICKNESS(Ct)		0.035		±0.005																																																																		
SPECIFICATION			WIDTH(Cw)		0.65		±0.03																																																																		
E																																																																									
D																																																																									
C	FPA-CA16-152-LF LEADFREE RoHS Compliant																																																																								
B	 煜倫股份有限公司 <table><tr><td colspan="2">PART NO. FPA-CA16-152</td><td colspan="2">DWG NO. FPA-CA16-152</td><td>CHECKED BY CY</td><td rowspan="2">TOLERANCES ARE .X ± .XX ± .XXX ± AWG</td><td colspan="2" rowspan="2">DESCRIP TION:</td><td colspan="2" rowspan="2"></td></tr><tr><td colspan="2">FILE NO.</td><td colspan="2">DRAWING BY</td></tr><tr><td>UNIT / mm</td><td>SCALE 1:1</td><td colspan="2">PROJECTION </td><td colspan="2"></td><td>AREA</td><td>REVISIONS</td><td>HK</td><td>DATE</td></tr></table>										PART NO. FPA-CA16-152		DWG NO. FPA-CA16-152		CHECKED BY CY	TOLERANCES ARE .X ± .XX ± .XXX ± AWG	DESCRIP TION:				FILE NO.		DRAWING BY		UNIT / mm	SCALE 1:1	PROJECTION 				AREA	REVISIONS	HK	DATE																																							
PART NO. FPA-CA16-152		DWG NO. FPA-CA16-152		CHECKED BY CY	TOLERANCES ARE .X ± .XX ± .XXX ± AWG	DESCRIP TION:																																																																			
FILE NO.		DRAWING BY																																																																							
UNIT / mm	SCALE 1:1	PROJECTION 				AREA	REVISIONS	HK	DATE																																																																
A																																																																									

FFC CABLE Charateristics特性表

UL STYLE: 20624

	Test Item 測試項目	Testing Method 測試方法	Specification 規格
1	Conductor resistance導體阻抗	JIS-C-3102(at20℃)	0.63 Ω/M MAX.
2	Insulation resistance絕緣阻抗	Apply the voltage of DC 500V for min	More than 1000MΩ 大於1000MΩ
3	Dielectric Srtength耐壓強度	AC 500V, 0.5Ma, 1分鐘,相鄰兩導體在空氣中	PASS
4	Continuity Test導通測試	Apply Test DC 3V	No open/Short Citcuit
5	Rated Current 額定電流		0.5A
6	Rated Voltage&Temperature 額定電壓及溫度	UL Sub, 758	60V 80℃
7	Operating Temperature操作溫度	Fixed Wiring Condition	-40℃~80℃
8	Flammability Test耐燃性測試	UL Sub, 758 V W-1	PASS
9	Heat Resistance抗熱測試	85℃ / 96Hrs	No Trouble with insulation Resistance and withstand voltage絕緣電阻與耐電壓符合要求
10	Humidity Resistance抗溼測試	40℃ , 95%RH, 96Hrs	
11	Temperature Cycling Test 溫度循環測試	-40℃ for 4hrs--85℃ for 4hrs--25℃ for 1hrs (5 cyc)	
12	Sliding Test柔性測試	R=Cable thickness	耐曲折測試≥ 30cycle
13		15mmR,70cycle/min , 25mm往復運動	耐曲折測試≥ 100,000cycle
14	Abrasion Test耐磨測試	Ø5mm,600g,60cycle/min	Min 10,000cycles 10,000回以上