


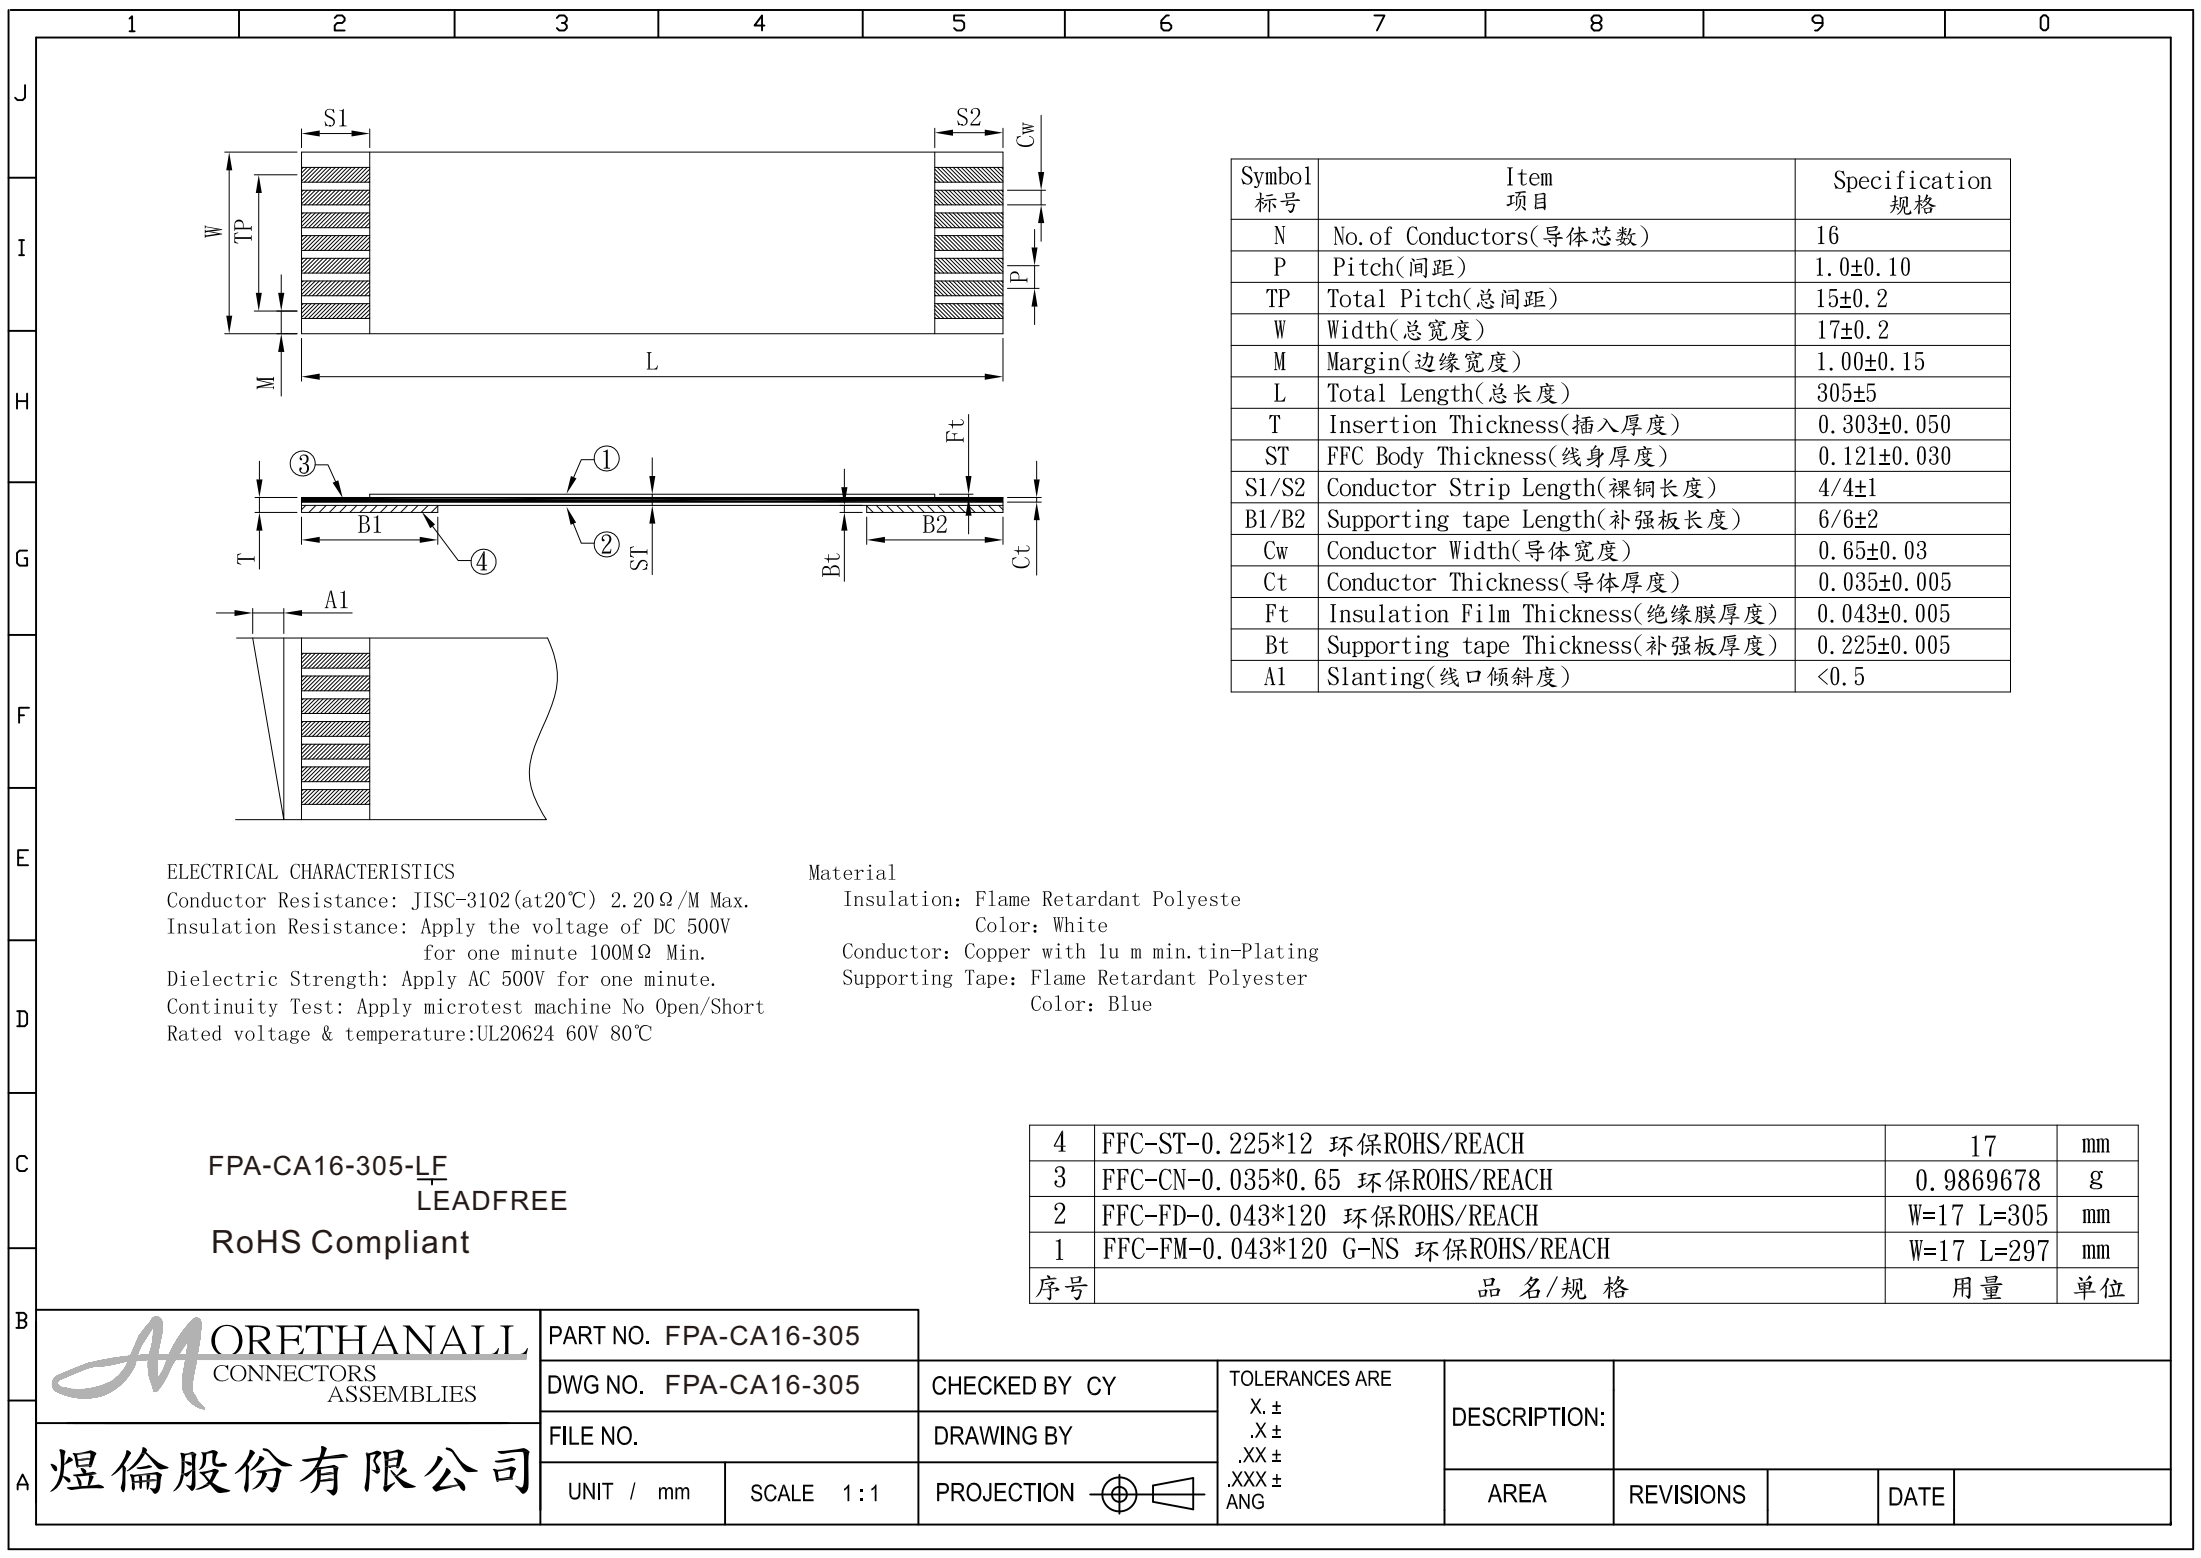

Symbol 标号	Item 项目	Specification 规格
N	No. of Conductors(导体芯数)	16
P	Pitch(间距)	1.0±0.10
TP	Total Pitch(总间距)	15±0.2
W	Width(总宽度)	17±0.2
M	Margin(边缘宽度)	1.00±0.15
L	Total Length(总长度)	305±5
T	Insertion Thickness(插入厚度)	0.303±0.050
ST	FFC Body Thickness(线身厚度)	0.121±0.030
S1/S2	Conductor Strip Length(裸铜长度)	4/4±1
B1/B2	Supporting tape Length(补强板长度)	6/6±2
Cw	Conductor Width(导体宽度)	0.65±0.03
Ct	Conductor Thickness(导体厚度)	0.035±0.005
Ft	Insulation Film Thickness(绝缘膜厚度)	0.043±0.005
Bt	Supporting tape Thickness(补强板厚度)	0.225±0.005
A1	Slanting(线口倾斜度)	<0.5

ELECTRICAL CHARACTERISTICS

Conductor Resistance: JISC-3102(at20℃) 2.20Ω/M Max.
Insulation Resistance: Apply the voltage of DC 500V
for one minute 100MΩ Min.
Dielectric Strength: Apply AC 500V for one minute.
Continuity Test: Apply microtest machine No Open/Short
Rated voltage & temperature:UL20624 60V 80℃

Material

Insulation: Flame Retardant Polyeste
Color: White
Conductor: Copper with 1u m min.tin-Plating
Supporting Tape: Flame Retardant Polyester
Color: Blue

FPA-CA16-305-LF
LEADFREE
RoHS Compliant

4	FFC-ST-0.225*12 环保ROHS/REACH	17	mm
3	FFC-CN-0.035*0.65 环保ROHS/REACH	0.9869678	g
2	FFC-FD-0.043*120 环保ROHS/REACH	W=17 L=305	mm
1	FFC-FM-0.043*120 G-NS 环保ROHS/REACH	W=17 L=297	mm
序号	品 名/规 格	用量	单位



煜倫股份有限公司

PART NO. FPA-CA16-305							
DWG NO. FPA-CA16-305		CHECKED BY CY	TOLERANCES ARE X. ± .X ± .XX ± .XXX ± ANG	DESCRIPTION:			
FILE NO.		DRAWING BY					
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS		DATE