


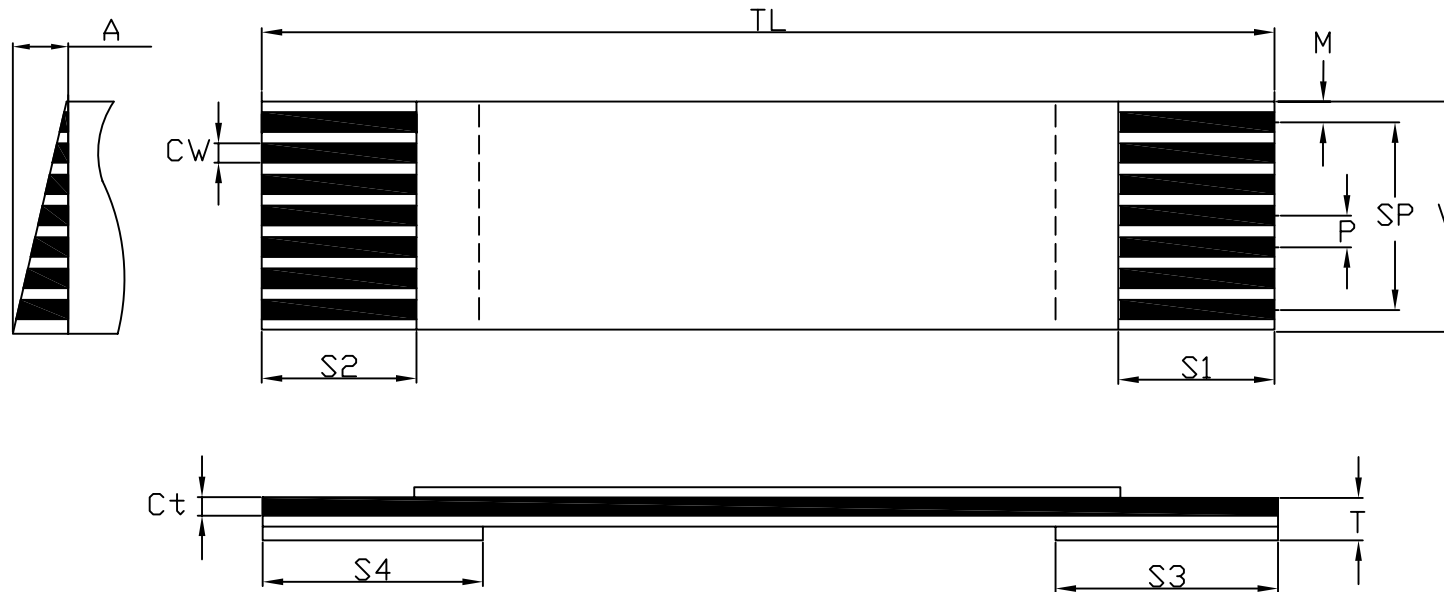

					UL NO.: E254391						
SYMBOL	P	W	SP	M	A	TL	T	S1	S2	S3	S4
PANGE	1.0	21	19	1.0	0	250	0.3	4	4	6	6
TOLERANCE	±0.08	±0.12	±0.1	±0.15	<0.5	±2.0	±0.05	±1.0	±1.0	±1.0	±1.0
CONDUCTOR SPECIFICATION	Tin Properties Copper wire (Tin 2~5u)		THICKNESS (Ct)		0.05		±0.01				
			WIDTH (Cw)		0.65		±0.03				

Cable Properties (UL STYLE:AWM 20624)

ITEM	Condition	Properties
Conductor Resistance	JTS C-3102 (@20°C)	Less than 1.82OHM/m
Insulation Resistance	DC 500V	More than 1.000OHM/m
Dielectric Strength	AC 500V 1min	No Breakdown
Heat Resistance	85°Cx95Hr	A-2,A-3 Pass
Heat Cycle Test (12Hr2Cycle)	-40°C — 25°C — 85°C — 25°C	A-2,A-3 Pass
Moisture Resistance	40°C,95%RH,96Hrs	A-2,A-3 Pass
Flame Test	UL Sub.758	VW-1 Pass
Flexing Test	180°C Folding Test	More than 20 times
Pull-out Test		More than 20 times
Abrasion Test	φ5mm,600g,60cycle/min	More than 10,000 times
Elongation of Insulation	JIS K-6732	More than 60%

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPA-CA20-250-LF
SERIES T LEADFREE
250mm
20WAY
SAME SIDE
CABLE

DESCRIPTION: