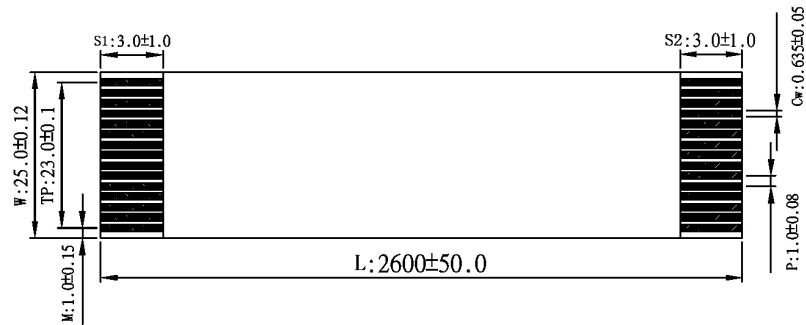


ELECTRICAL CHARACTERISTICS

Conductor Resistance: JISC-3102(at20℃) 2.20Ω /KM Max.

Insulation Resistance: Apply the voltage of DC 500V
for one min 100MΩ Min.

Dielectric Strength: Apply AC 500V for one minute.

Continuity Test: Apply microtest machine No Open/Short
Rated voltage & temperature:UL Sub.758VW-1

Material

Insulation 'Flame Retardant Polyeste

Color 'White

Conductor 'Copper with 1u m min.tin-Plating

Supporting Tape 'Flame Retardant Polyester

Color 'Blue

FPA-CA24-2600-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FPA-CA24-2600

DWG NO. FPA-CA24-2600

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司