


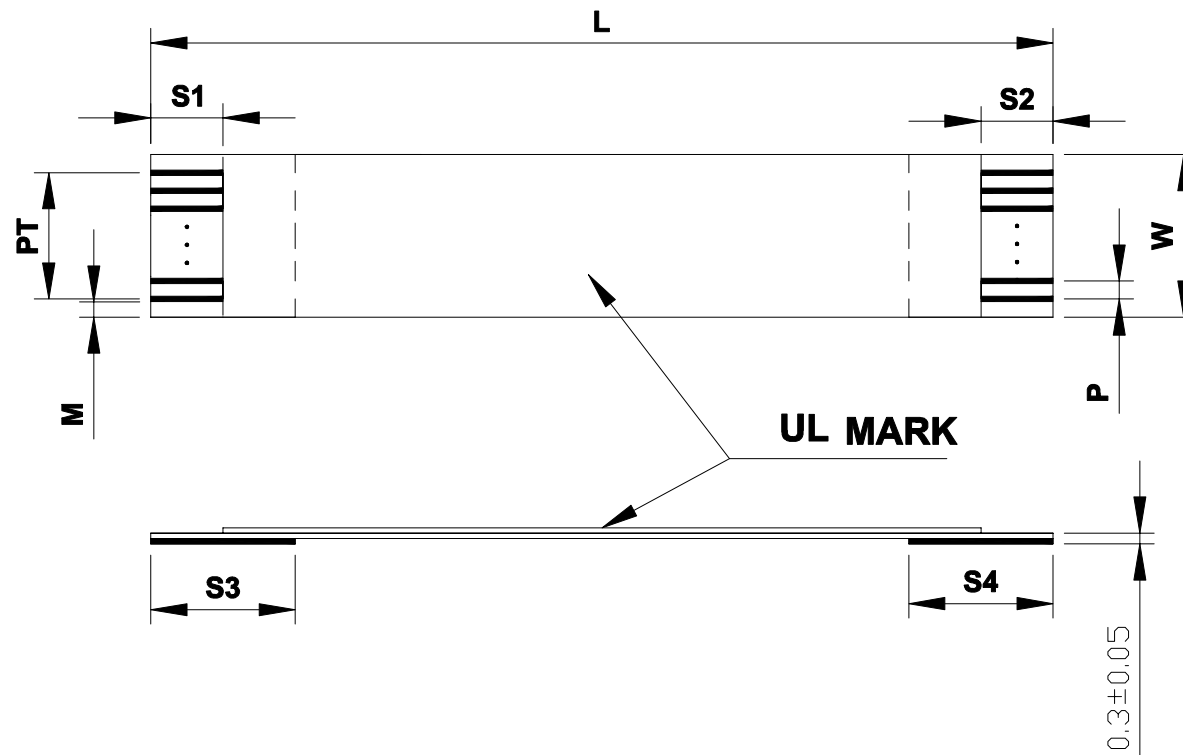

NOTES:

Num. of conductors	Num. of conductors	30pins
conductor width	conductor width	0.6*0.1mm
Pitch	Pitch(P)	1.0mm
total length	L	1000±25
Width	W	31±0.1
Total Pitch	PT	29±0.15
Margin	M	0.7±0.1
Strip lenght	S1	4±1
Strip lenght	S2	4±1
Length of Stiffner	S3	6±2
Length of Stiffner	S4	6±2

Terminal thickness includ:
support tape thickness 0.225mm
Conductor thickness 0.1 mm

Available UL Standard : 2643 105°C,300V

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FPA-CA30-1000

DWG NO. FPA-CA30-1000

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司