

1234567890

J

I

H

G

F


E

D

C

B

A

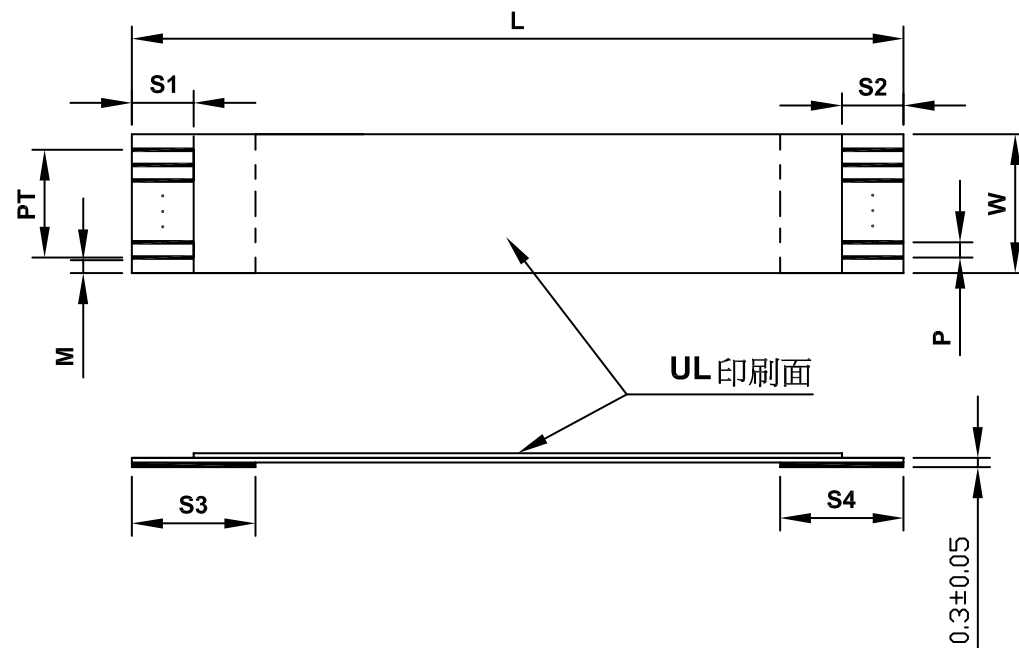

NOTES:

導體數	Num. of conductors	2pins	3pins	4pins	6pins
導體	conductor width	0.6*0.1mm	0.6*0.1mm	0.6*0.1mm	0.6*0.1mm
導體間距	Pitch(P)	1.0mm	1.0mm	1.0mm	1.0mm
成品總長度	L	150±4	150±4	150±4	150±4
成品總寬度	W	3±0.1	4±0.1	5±0.1	7±0.1
導體總間距	PT	1±0.15	2±0.15	3±0.15	5±0.15
邊緣寬度	M	0.35±0.1	0.35±0.1	0.35±0.1	0.35±0.1
露銅長度	S1	4±1	4±1	4±1	4±1
露銅長度	S2	4±1	4±1	4±1	4±1
加強板寬度	S3	6±2	6±2	6±2	6±2
加強板寬度	S4	6±2	6±2	6±2	6±2

FPA-CAxx-150-LF
LEADFREE
02,03,04,06WAY
RoHS Compliant

Available UL Standard:2896-80°,30V

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FPA-CAxx-150

DWG NO. FPA-CAxx-150

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司