


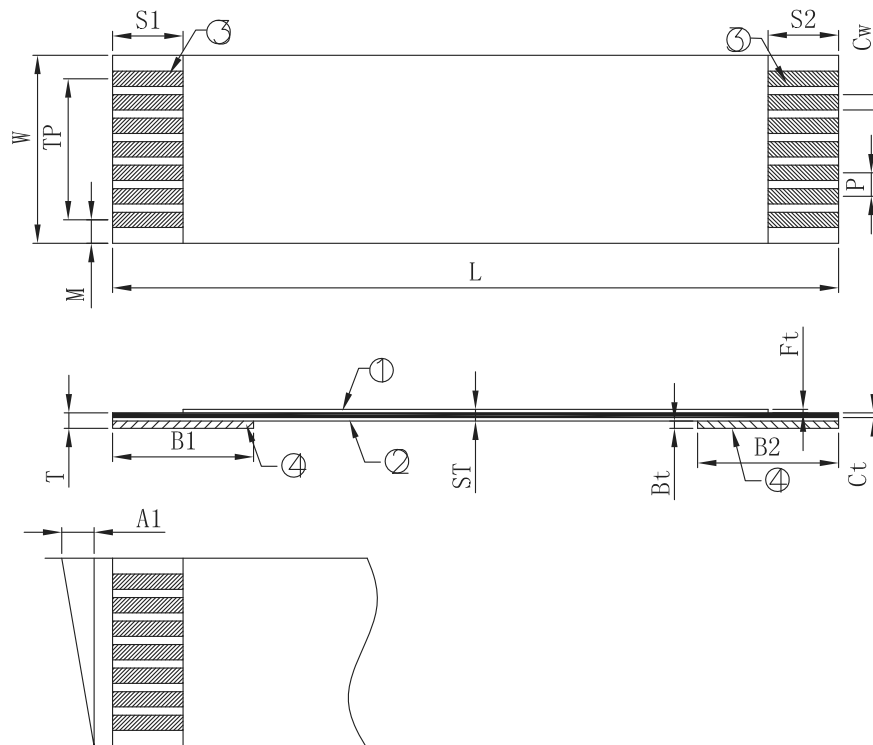

Symbol	Item	Specification
N	No.of Conductors	POSITION
P	Pitch	1.00±0.05
TP	Total Pitch	3.0±0.1
W	Width	5.0±0.1
M	Margin	1.00±0.15
L	Total Length	CABLE Length ±5
T	Insertion Thickness	0.335±0.05
ST	FFC Body Thickness	0.17±0.03
S1/S2	Conductor Strip Length	4/4±1
B1/B2	Supporting tape Length	8/8±2
Cw	Conductor Width	0.65±0.03
Ct	Conductor Thickness	0.050±0.005
Ft	Insulation Film Thickness	0.060±0.005
Bt	Supporting tape Thickness	0.225±0.005
A1	Slanting	<0.5

ELECTRICAL CHARACTERISTICS

Conductor Resistance: JISC-3102(at20℃) 2.20Ω /KM Max.

Insulation Resistance: Apply the voltage of DC 500V
for one min 100MΩ Min.

Dielectric Strength: Apply AC 500V for one minute.

Continuity Test: Apply microtest machine No Open/Short

Rated voltage & temperature:UL Sub.758VW-1

Material

Insulation: Flame Retardant Polyeste

Color: White

Conductor: Copper with 1u m min.tin-Plating

Supporting Tape: Flame Retardant Polyester

Color: Blue

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

FPA-CApp-xxx(4488)-LF
 SERIES CABLE 050:50mm CABLE LENGTH
 SAME SIDES 16:16 WAY
 LEADFREE
 SPECIAL S1/S2 B1/B2 (4488)

DESCRIPTION: