


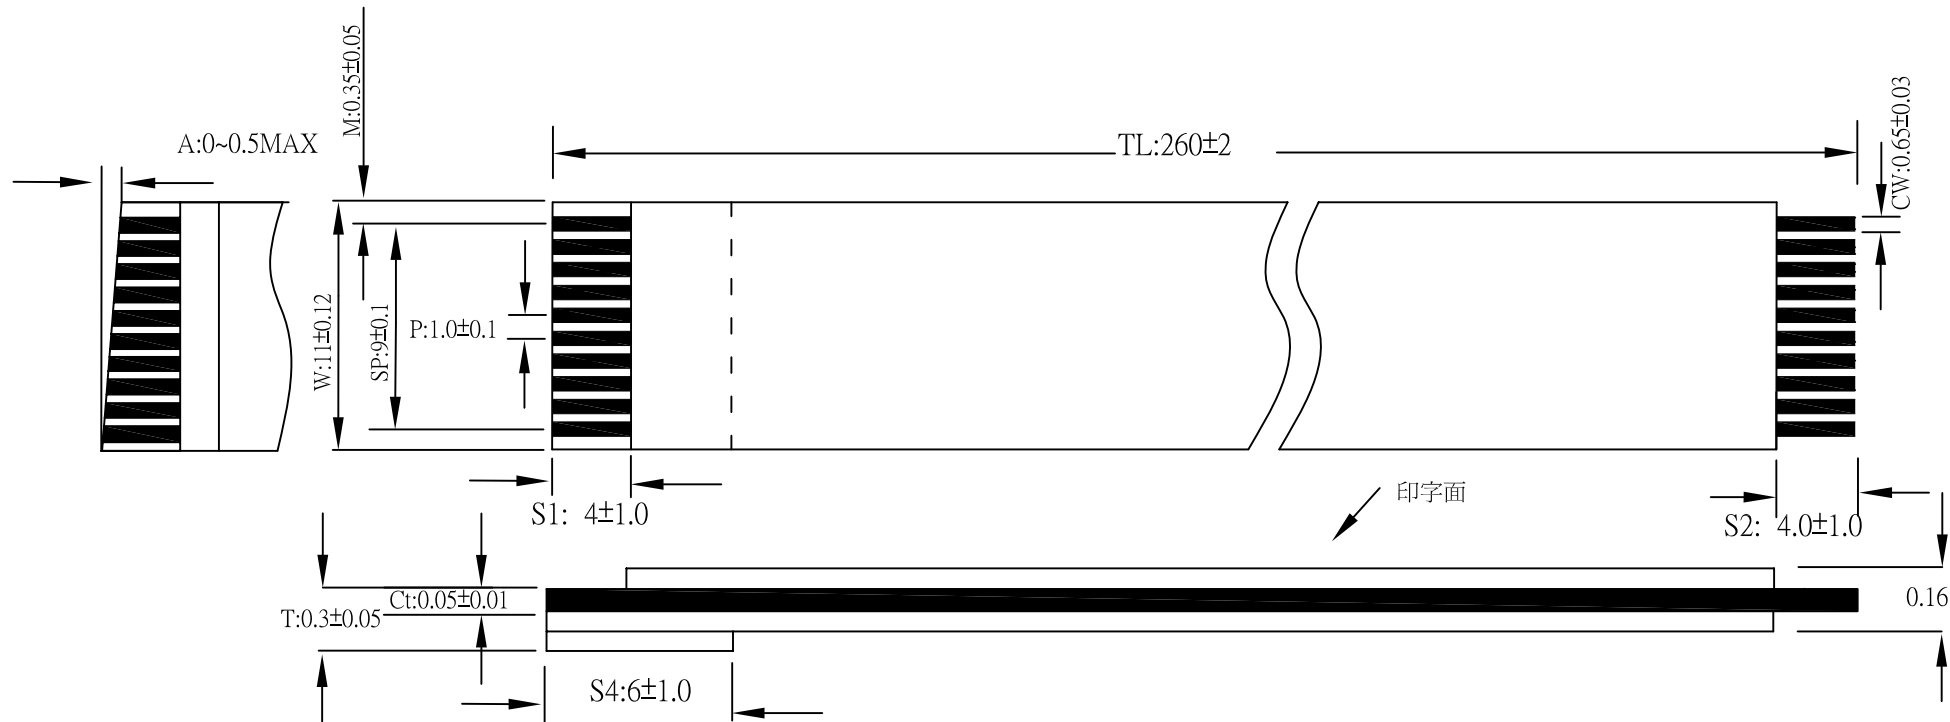

1. Bare flexible flat conductors
2. Pitch: 1.0 mm
3. Number of conductors: 10
4. Insulator: Whit polyester 0.11 mm thick
5. Finish: Tin cover

FPA-CC10-260-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FPA-CC10-260

DWG NO. FPA-CC10-260

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:

FFC CABLE PH1.0mm L=260mm B TYPE 10PIN

AREA

REVISIONS

HK

DATE

煜倫股份有限公司