


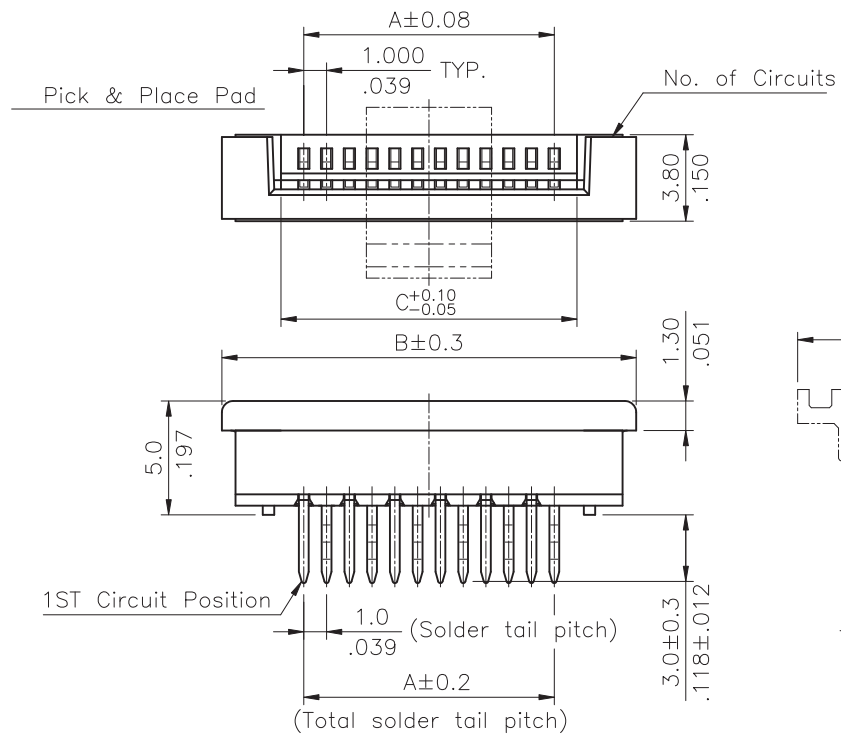


A = 1.00 * No. of Spaces



B = A + 7.2

C = A + 2.1

* Available in 4 through 32 circuits

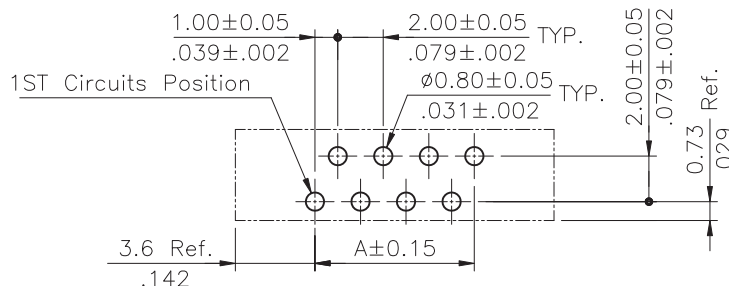

Recommended P.C. Board Layout

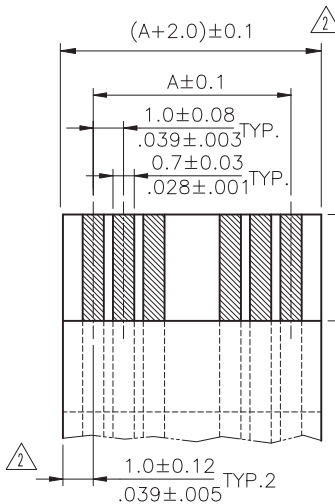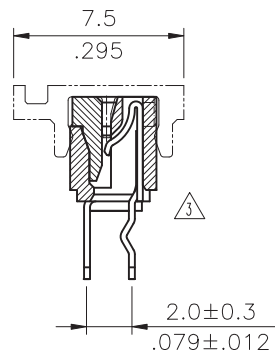

* ACCOMMODATED FFC


Material:

* Insulation: Nylon 6T UL 94V-0, Color Nature

* Slider: Nylon 6T UL 94V-0, Color Brown

* Contact: Phosphor Bronze

△ * PAD: Nylon 6T UL 94V-0, Color Black

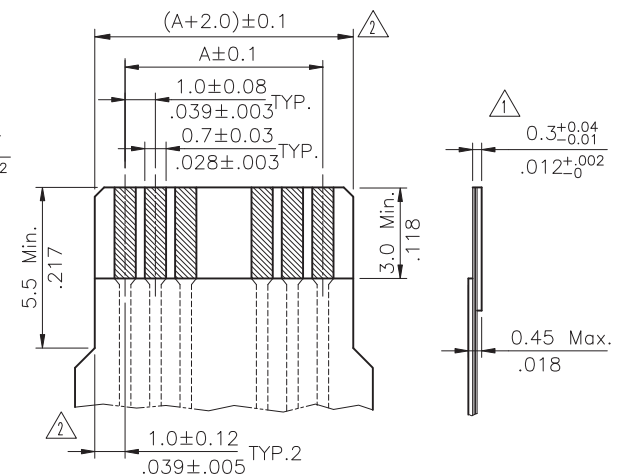

* ACCOMMODATED FPC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-DLAL50C-xx-LF
SERIES
DIP 180°
NON ZIF
LEAD FREE
04~32WAY
CAP
HIGH 5.0mm
L TYPE FOOT
SINGLE CONTACT

DESCRIPTION: 1.00mm(.039") ST. DIP TYPE ZIF FFC/FPC CONNECTOR