

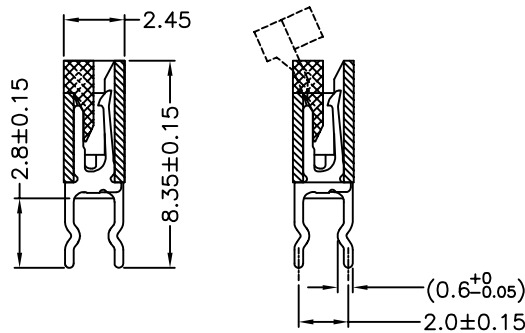
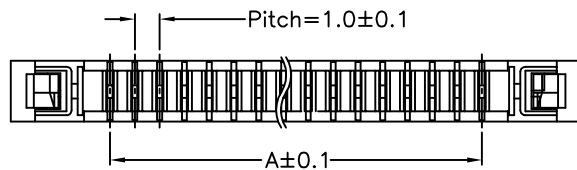
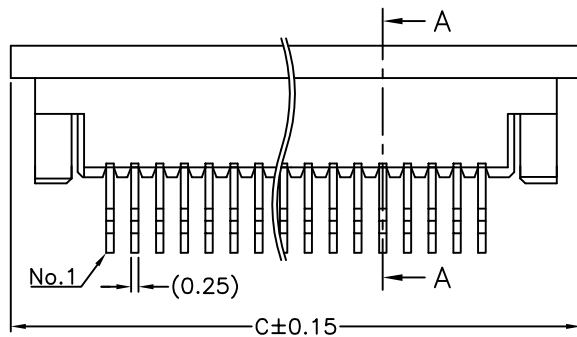


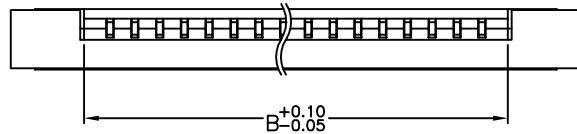

SECTION A-A

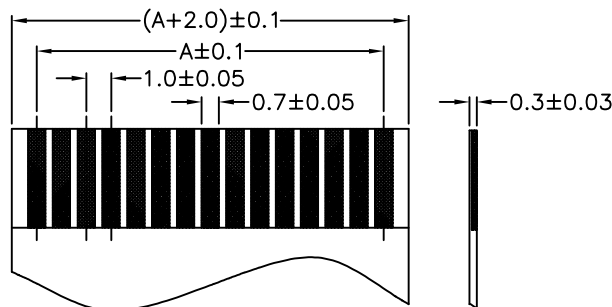

APPLICABLE FPC

NOTES :


1. MATERIAL:

HOUSING: LCP UL 94-V0
COVER: LCP UL 94-V0
CONTACT: COPPER ALLOYS

2. PLATING:

CONTACT: Sn ON THE CONTACT
Ni UNDER PLATED OVER ALL.

CKT	Dim A	Dim B	Dim C	CKT	Dim A	Dim B	Dim C
4	3.00	5.06	11.00	23	22.00	24.06	30.00
5	4.00	6.06	12.00	24	23.00	25.06	31.00
6	5.00	7.06	13.00	25	24.00	26.06	32.00
7	6.00	8.06	14.00	26	25.00	27.06	33.00
8	7.00	9.06	15.00	27	26.00	28.06	34.00
9	8.00	10.06	16.00	28	27.00	29.06	35.00
10	9.00	11.06	17.00	29	28.00	30.06	36.00
11	10.00	12.06	18.00	30	29.00	31.06	37.00
12	11.00	13.06	19.00	31	30.00	32.06	38.00
13	12.00	14.06	20.00	32	31.00	33.06	39.00
14	13.00	15.06	21.00	33	32.00	34.06	40.00
15	14.00	16.06	22.00	34	33.00	35.06	41.00
16	15.00	17.06	23.00	35	34.00	36.06	42.00
17	16.00	18.06	24.00	36	35.00	37.06	43.00
18	17.00	19.06	25.00	37	36.00	38.06	44.00
19	18.00	20.06	26.00	38	37.00	39.06	45.00
20	19.00	21.06	27.00	39	38.00	40.06	46.00
21	20.00	22.06	28.00	40	39.00	41.06	47.00
22	21.00	23.06	29.00				

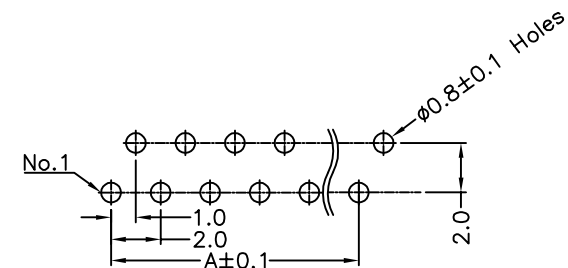

RECOMMENDED PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

FPA-DLAL55-xx-LF
SERIES
DIP 180°
LEAD FREE
04~40WAY
HIGH 5.5mm
L TYPE FOOT
SINGLE CONTACT
NON ZIF

DESCRIPTION: FPC PITCH 1.0 VERTICAL STICKING DIP TYPE