

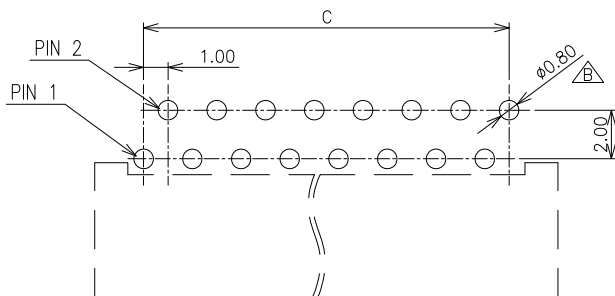
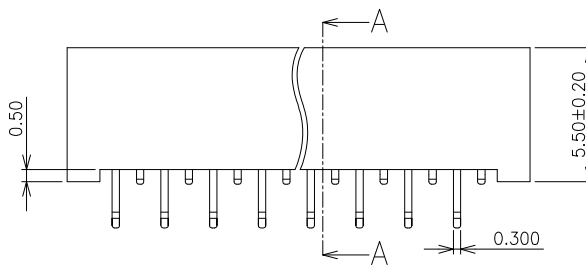
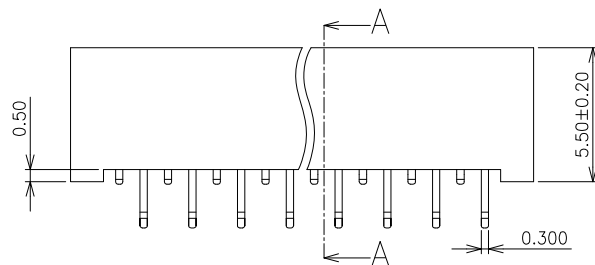



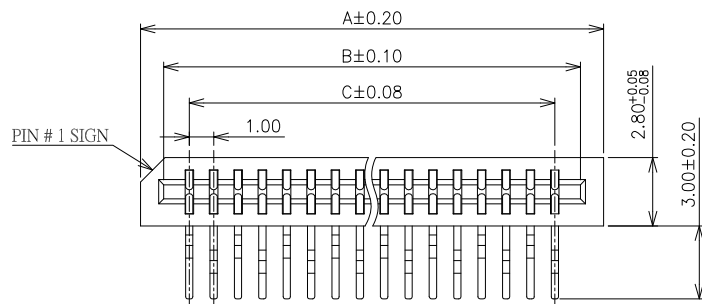

FPCZ-10280IWDG-xx-TT-G

RECOMMENDED PCB LAYOUT

FPC/FFC T=0.30±0.05

NOTE:

■ MATERIAL

HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.

CONTACT: COPPER ALLOY.

PLATING: TIN PLATED OVER NICKEL.

■ ELECTRICAL

CURRENT RATING: 1.0 AMP.

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.

INSULATION RESISTANCE: 500MΩ MIN.

CONTACT RESISTANCE: 30mΩ MAX.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -25°C TO 85°C.

■ DIMENSION TABLE

No. of contacts	Dimensions				No. of contacts	Dimensions			
	间距p	A	B	C		间距p	A	B	C
2		5.00	3.10	1.00	20	●	23.00	21.10	19.00
3	●	6.00	4.10	2.00	21	●	24.00	22.10	20.00
4	●	7.00	5.10	3.00	22	●	25.00	23.10	21.00
5	●	8.00	6.10	4.00	23		26.00	24.10	22.00
6	●	9.00	7.10	5.00	24		27.00	25.10	23.00
7	●	10.00	8.10	6.00	25	●	28.00	26.10	24.00
8	●	11.00	9.10	7.00	26	●	29.00	27.10	25.00
9	●	12.00	10.10	8.00	27		30.00	28.10	26.00
10	●	13.00	11.10	9.00	28	●	31.00	29.10	27.00
11	●	14.00	12.10	10.00	29		32.00	30.10	28.00
12	●	15.00	13.10	11.00	30	●	33.00	31.10	29.00
13	●	16.00	14.10	12.00	31		34.00	32.10	30.00
14	●	17.00	15.10	13.00	32	●	35.00	33.10	31.00
15	●	18.00	16.10	14.00	33		36.00	34.10	32.00
16	●	19.00	17.10	15.00	34	●	37.00	35.10	33.00
17	●	20.00	18.10	16.00	35		38.00	36.10	34.00
18	●	21.00	19.10	17.00	36		39.00	37.10	35.00
19		22.00	20.10	18.00					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-RL2L-xx-LF

SERIES
LEADFREE
03~34WAY
L TYPE FOOT
DUAL CONTACT
NON ZIF
90°SMT

DESCRIPTION: