

NOTES

1.MATERIAL:


HOUSING: NYLON46 UL 94V-0

ACTUATOR: PPA UL 94V-0

PHOSPHOR BRONZE

2.PLATING: 1.TIN/LEAD 120u"MIN OVER NICKEL.




3.PACKING: TUBE.




FFC/FPC DIMENSION
THICKNESS $0.3 \pm 0.05\text{mm}$
TOLERANCE 0.05mm

30	29.00	31.20	35.40
29	28.00	30.20	34.40
28	27.00	29.20	33.40
27	26.00	28.20	32.40
26	25.00	27.20	31.40
25	24.00	26.20	30.40
24	23.00	25.20	29.40
23	22.00	24.20	28.40
22	21.00	23.20	27.40
21	20.00	22.20	26.40
20	19.00	21.20	25.40
19	18.00	20.20	24.40
18	17.00	19.20	23.40
17	16.00	18.20	22.40
CKT	DIM. A	DIM. B	DIM. C


16	15.00	17.20	21.40
15	14.00	16.20	20.40
14	13.00	15.20	19.40
13	12.00	14.20	18.40
12	11.00	13.20	17.40
11	10.00	12.20	16.40
10	9.00	11.20	15.40
9	8.00	10.20	14.40
8	7.00	9.20	13.40
7	6.00	8.20	12.40
6	5.00	7.20	11.40
5	4.00	6.20	10.40
4	3.00	5.20	9.40
3	2.00	4.20	8.40
CKT	DIM. A	DIM. B	DIM. C

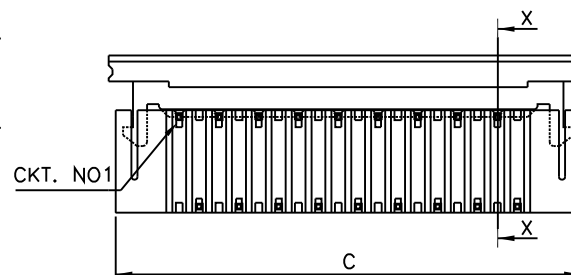

SECTION X-X

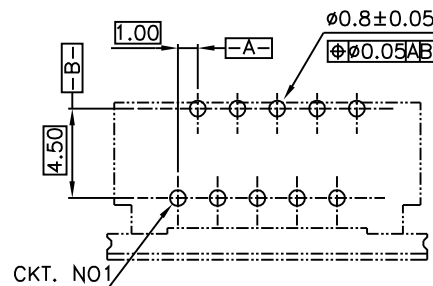

PC BOARD LAYOUT
COMPONENT SIDE
PCB T=0.6mm

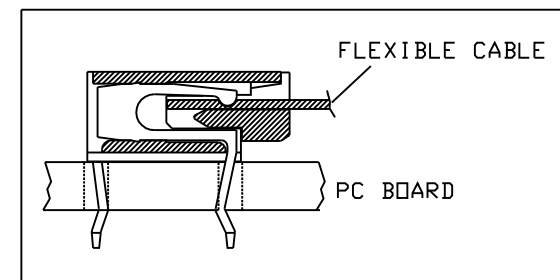

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

照片框

ORDER INFORMATION

FPA-SZAL4-xx-LF

SERIES T LEADFREE

03~30WAY

4.50mm

L TYPE FOOT

SIDE ENTRY SINGLE CONTACT

ZIF

DESCRIPTION: (1.0mm) ASS'Y(RIGHT ANGLE) ZIF for FFC/FPC