

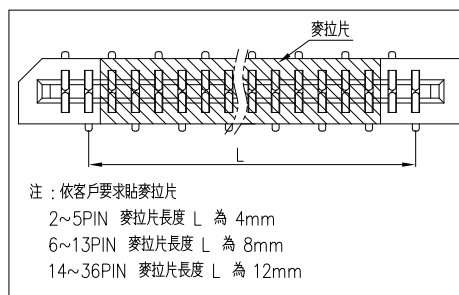


A-A



# NOTE:

## ■ MATERIAL

HOUSING: GLASS-REINFORCED THERMOPLASTIC UL 94V-0.  
CONTACT: COPPER ALLOY.  
PLATING: TIN PLATED OVER NICKEL.

## ■ ELECTRICAL

CURRENT RATING: 1.0 AMP.  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN.  
INSULATION RESISTANCE: 500M  $\Omega$  MIN.  
CONTACT RESISTANCE: 30m $\Omega$  MAX.

## ■ ENVIRONMENTAL

TEMPERATURE RANGE: -25°C TO +85°C.

## ■ DIMENSION TABLE

| Circuits | Dimension |       |       | Circuits | Dimension |       |       |
|----------|-----------|-------|-------|----------|-----------|-------|-------|
|          | A         | B     | C     |          | A         | B     | C     |
| 2        | 5.00      | 3.10  | 1.00  | 20       | 23.00     | 21.10 | 19.00 |
| 3        | 6.00      | 4.10  | 2.00  | 21       | 24.00     | 22.10 | 20.00 |
| 4        | 7.00      | 5.10  | 3.00  | 22       | 25.00     | 23.10 | 21.00 |
| 5        | 8.00      | 6.10  | 4.00  | 23       | 26.00     | 24.10 | 22.00 |
| 6        | 9.00      | 7.10  | 5.00  | 24       | 27.00     | 25.10 | 23.00 |
| 7        | 10.00     | 8.10  | 6.00  | 25       | 28.00     | 26.10 | 24.00 |
| 8        | 11.00     | 9.10  | 7.00  | 26       | 29.00     | 27.10 | 25.00 |
| 9        | 12.00     | 10.10 | 8.00  | 27       | 30.00     | 28.10 | 26.00 |
| 10       | 13.00     | 11.10 | 9.00  | 28       | 31.00     | 29.10 | 27.00 |
| 11       | 14.00     | 12.10 | 10.00 | 29       | 32.00     | 30.10 | 28.00 |
| 12       | 15.00     | 13.10 | 11.00 | 30       | 33.00     | 31.10 | 29.00 |
| 13       | 16.00     | 14.10 | 12.00 | 31       | 34.00     | 32.10 | 30.00 |
| 14       | 17.00     | 15.10 | 13.00 | 32       | 35.00     | 33.10 | 31.00 |
| 15       | 18.00     | 16.10 | 14.00 | 33       | 36.00     | 34.10 | 32.00 |
| 16       | 19.00     | 17.10 | 15.00 | 34       | 37.00     | 35.10 | 33.00 |
| 17       | 20.00     | 18.10 | 16.00 | 35       | 38.00     | 36.10 | 34.00 |
| 18       | 21.00     | 19.10 | 17.00 | 36       | 39.00     | 37.10 | 35.00 |
| 19       | 22.00     | 20.10 | 18.00 |          |           |       |       |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X,  $\pm$   
.X  $\pm$  0.30  
.XX  $\pm$  0.20  
.XXX  $\pm$  0.10  
ANG  $\pm$

PPOJECTION

照片框

## ORDER INFORMATION

FPA-VL2R56C-xx-LF  
SERIES | | | | | LEADFREE  
| | | | | 02~36WAY  
| | | | | MYLAR  
180°SMT | | | | | HIGH 5.6mm  
NON ZIF | | | | | R TYPE FOOT  
| | | | | DUAL CONTACT

DESCRIPTION: 1.0PH 5.6H 無蓋斜角立貼雙接正反腳位