

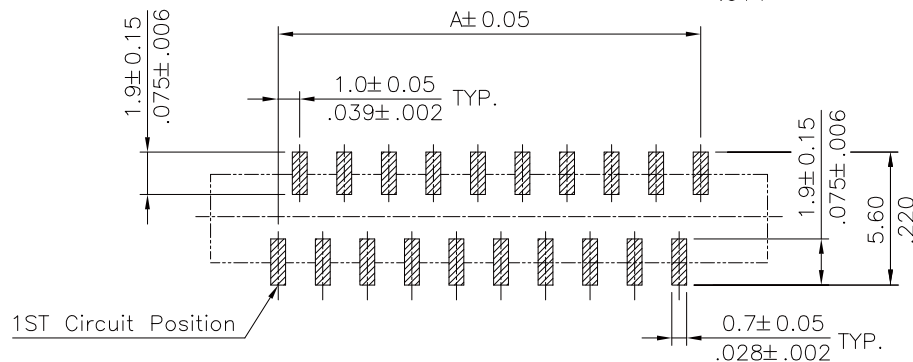
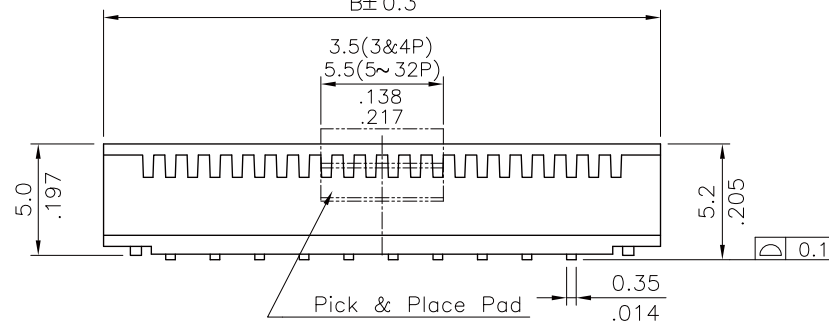
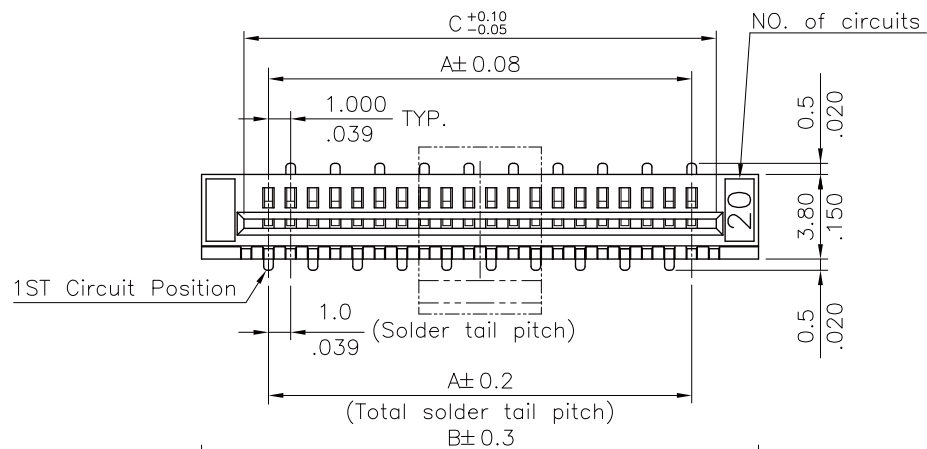


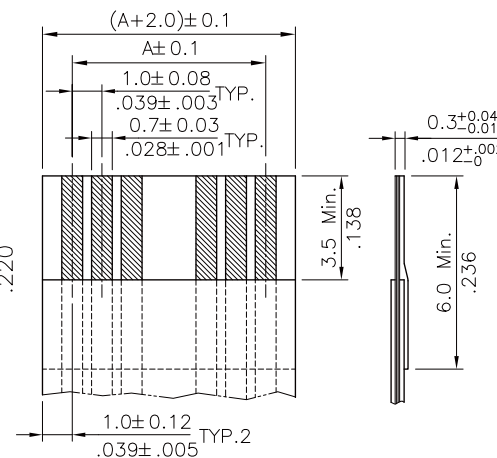

Sold Pad Pattern

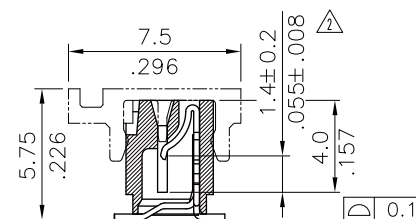

\* ACCOMMODATED FFC

#### Notes:


- \* Insulation: Nylon 6T UL 94V-0 (Halogen-Free)
- \* Contact: Phosphor Bronze
- \* PAD: Nylon 6T UL 94V-0, Color Black(Halogen-Free)
- \* For Lead-Free IR Reflow process

$$A = 1.00 \times \text{No. of Spaces}$$

$$B = A + 6.0$$

$$C = A + 2.1$$

- \* Available in 3 through 32 circuits

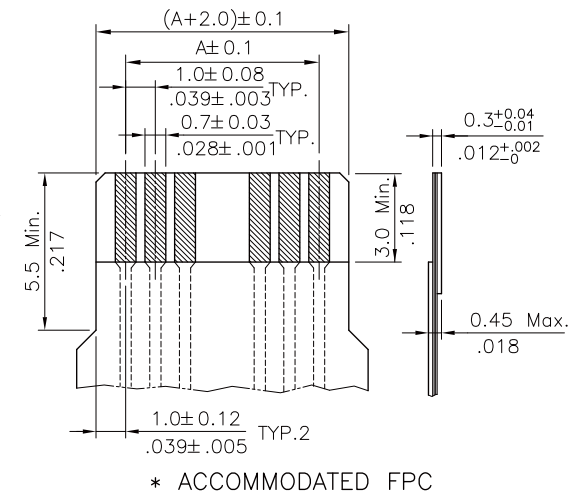

#### RoHS Compliant

#### TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X, ±  
.X ± 0.15  
.XX ± 0.10  
.XXX ± 0.05  
ANG ±

照片框

#### ORDER INFORMATION

FPA-VLAL52GCR-xx-LF

SERIES

180°SMT

NON ZIF

SINGLE CONTACT

L TYPE

REEL

CAP


GOLD

HIGH 5.2mm

LEAD FREE

03~32WAY



DESCRIPTION:

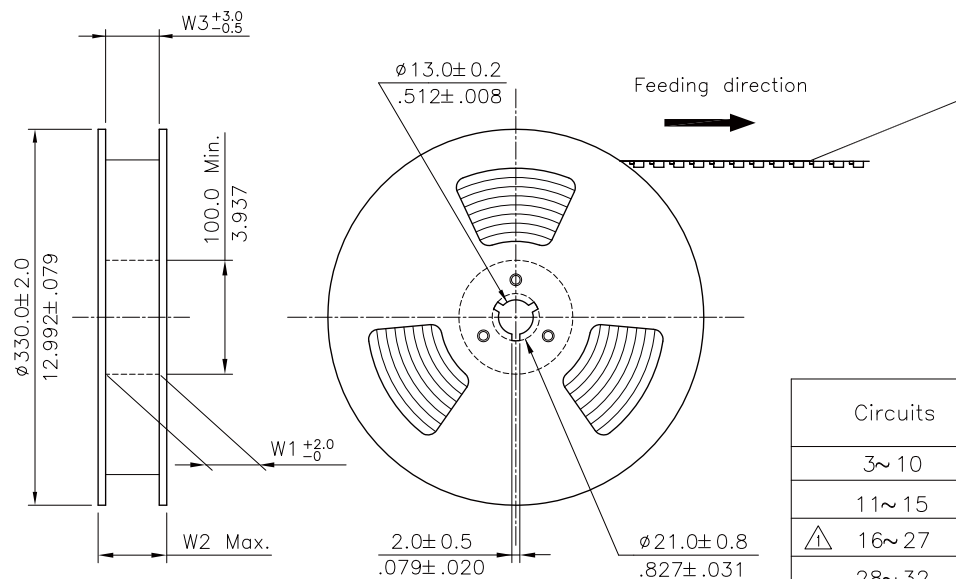

NOTE :

- \* Reel Material : Corrugated Paper
- \* Carrier Material : Clear, Conductive Polystyrene Alloy
- \* Cover Tape Material : Polyester
- \* Cover Tape Peel Strength : 0.1N – 1.3N
- \* Carrier camber is within 1mm in 250mm
- \* All dimensions meet EIA-481-B requirements.
- \* Quantity : 800 PCS/Reel

| Circuits | Dimension   |              |             |             |             | Packing<br>(Reel/Carton) |
|----------|-------------|--------------|-------------|-------------|-------------|--------------------------|
|          | E           | F            | W1          | W2          | W3          |                          |
| 3~ 10    | 24.0(.945)  | ---          | 24.5(.965)  | 30.5(1.201) | 24.5(.965)  | 9                        |
| 11~ 15   | 32.0(1.260) | 28.40(1.118) | 32.5(1.280) | 38.5(1.516) | 32.5(1.280) | 7                        |
| △ 16~ 27 | 44.0(1.732) | 40.40(1.591) | 44.5(1.752) | 50.5(1.988) | 44.5(1.752) | 5                        |
| 28~ 32   | 56.0(2.205) | 52.40(2.063) | 56.5(2.224) | 62.5(2.461) | 56.5(2.224) | 3                        |

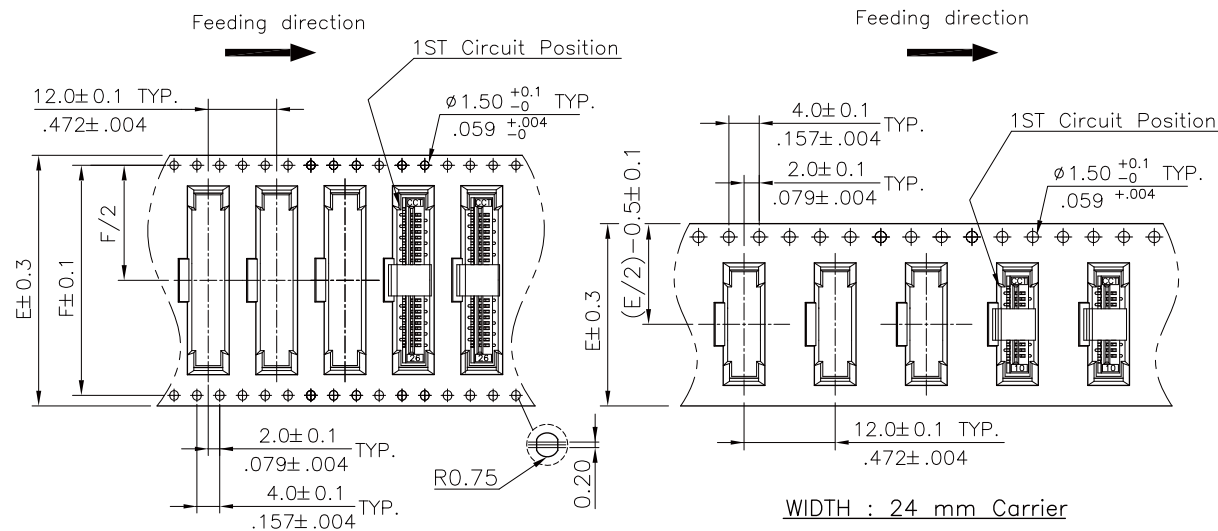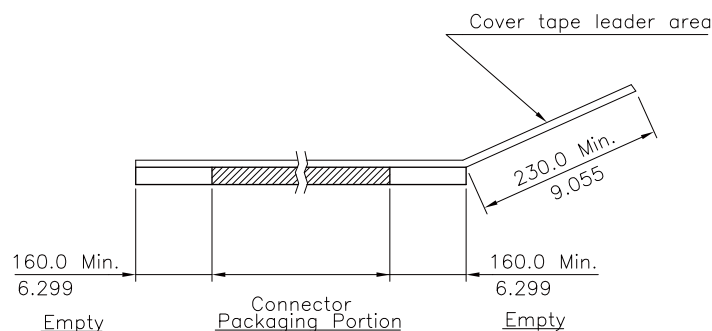

WIDTH : 32, 44 & 56 mm Carrier

WIDTH : 24 mm Carrier

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±  
.X ± 0.15  
.XX ± 0.10  
.XXX ± 0.05  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VLAL52GCR-xx-LF

SERIES

180°SMT

NON ZIF

SINGLE CONTACT

L TYPE

REEL

CAP

GOLD

HIGH 5.2mm

LEAD FREE

03~32WAY

DESCRIPTION: