

PERFORMANCE CHARACTERISTICS

Operating Voltage: 50 VAC Max.
Current Rating: 0.5 Amp Max.
Contact Resistance: 30 mΩ Max.
Insulation Resistance: 500 MΩ Min.
Dielectric Withstanding Voltage: 500 VAC RMS.
Operating Temperature: -40°C TO +85°C
Accommodated FFC/FFC Thickness: 0.25~0.35mm

MATERIAL

Insulator: PA9T; UL94V-0 Rated
Insulator Color: Natural(Ivory)
Terminal: Phosphor Bronze
Plating: See Ordering Information

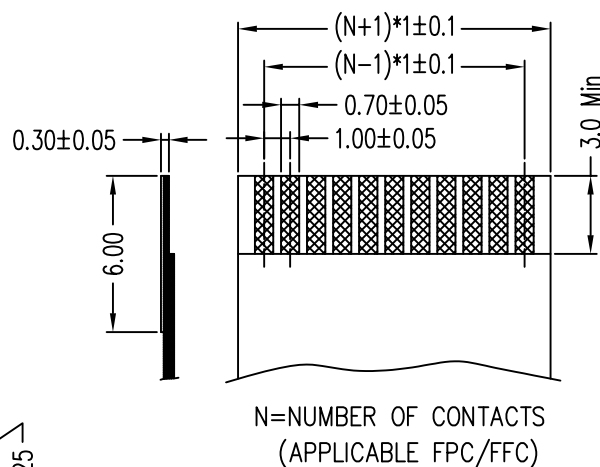
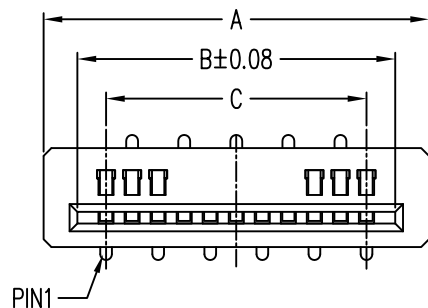
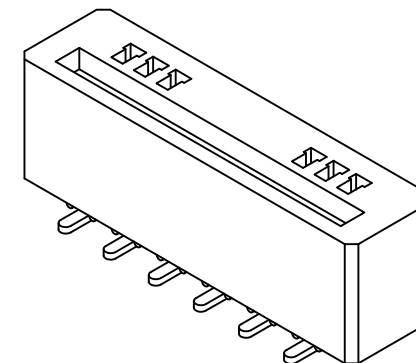
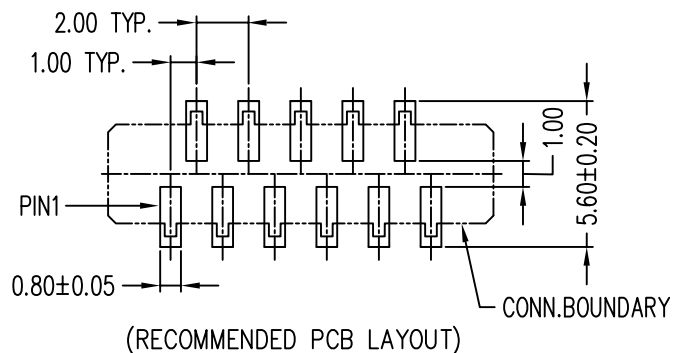


TABLE OF DIM.

POS.	A±0.20	B±0.08	C±0.15	POS.	A±0.20	B±0.08	C±0.15
4	7.80	5.15	3.00	20	23.80	21.15	19.00
5	8.80	6.15	4.00	21	24.80	22.15	20.00
6	9.80	7.15	5.00	22	25.80	23.15	21.00
7	10.80	8.15	6.00	23	26.80	24.15	22.00
8	11.80	9.15	7.00	24	27.80	25.15	23.00
9	12.80	10.15	8.00	25	28.80	26.15	24.00
10	13.80	11.15	9.00	26	29.80	27.15	25.00
11	14.80	12.15	10.00	27	30.80	28.15	26.00
12	15.80	13.15	11.00	28	31.80	29.15	27.00
13	16.80	14.15	12.00	29	32.80	30.15	28.00
14	17.80	15.15	13.00	30	33.80	31.15	29.00
15	18.80	16.15	14.00	31	34.80	32.15	30.00
16	19.80	17.15	15.00	32	35.80	33.15	31.00
17	20.80	18.15	16.00	33	36.80	34.15	32.00
18	21.80	19.15	17.00	34	37.80	35.15	33.00
19	22.80	20.15	18.00				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPA-VLAL53-xx-LF
SERIES L LEADFREE
04~34WAY
HIGH 5.3mm
L TYPE FOOT POSITION
180°SMT SINGLE CONTACT
NON ZIF

DESCRIPTION: 1.0 NONZIF FPC CONN. TOP ENTRY SMT TYPE