

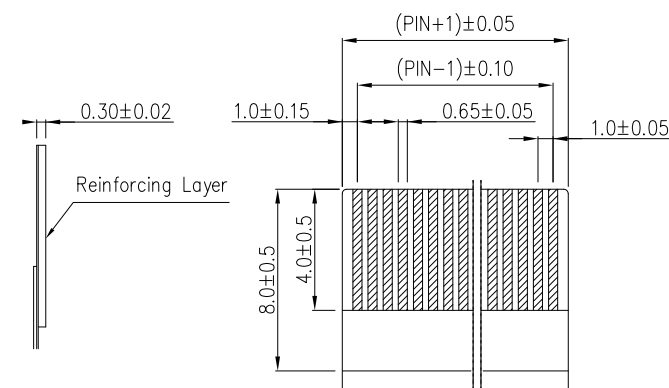

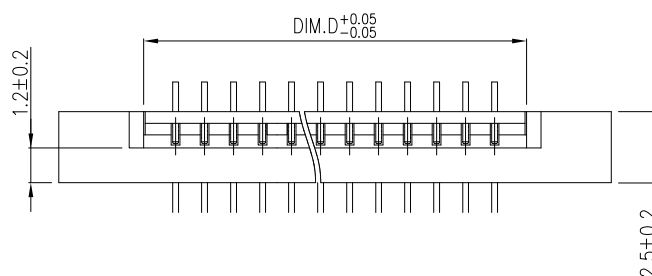




No. of contacts	Dimensions			
	A	B	C	D
4	9.00	3.00	11.00	5.10
5	10.00	4.00	12.00	6.10
6	11.00	5.00	13.00	7.10
7	12.00	6.00	14.00	8.10
8	13.00	7.00	15.00	9.10
9	14.00	8.00	16.00	10.10
10	15.00	9.00	17.00	11.10
11	16.00	10.00	18.00	12.10
12	17.00	11.00	19.00	13.10
13	18.00	12.00	20.00	14.10
14	19.00	13.00	21.00	15.10
15	20.00	14.00	22.00	16.10
16	21.00	15.00	23.00	17.10
17	22.00	16.00	24.00	18.10
18	23.00	17.00	25.00	19.10
19	24.00	18.00	26.00	20.10
20	25.00	19.00	27.00	21.10
21	26.00	20.00	28.00	22.10
22	27.00	21.00	29.00	23.10
23	28.00	22.00	30.00	24.10
24	29.00	23.00	31.00	25.10
25	30.00	24.00	32.00	26.10
26	31.00	25.00	33.00	27.10
27	32.00	26.00	34.00	28.10
28	33.00	27.00	35.00	29.10
29	34.00	28.00	36.00	30.10
30	35.00	29.00	37.00	31.10
31	36.00	30.00	38.00	32.10
32	37.00	31.00	39.00	33.10
33	38.00	32.00	40.00	34.10
34	39.00	33.00	41.00	35.10
35	40.00	34.00	42.00	36.10
36	41.00	35.00	43.00	37.10
37	42.00	36.00	44.00	38.10
38	43.00	37.00	45.00	39.10
39	44.00	38.00	46.00	40.10
40	45.00	39.00	47.00	41.10

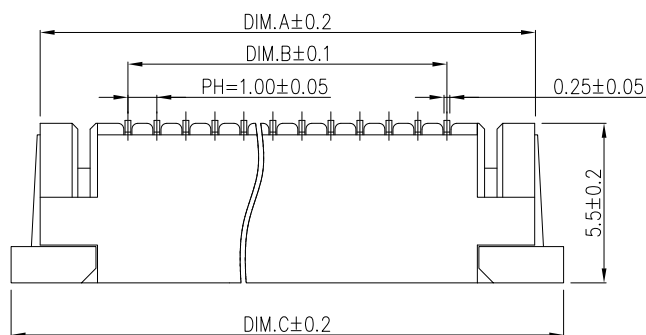

RECOMMENDED FFC/FPC DIM.

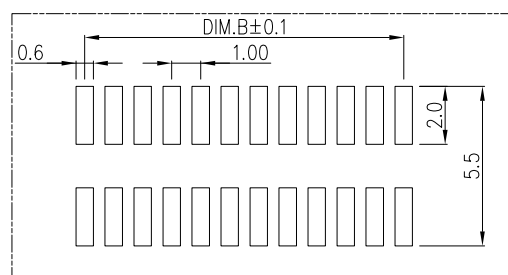

PCB Layout

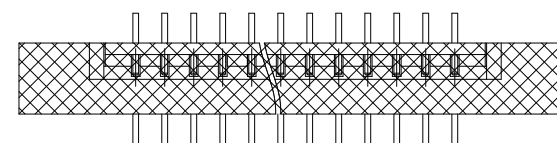

SPEC :

1. Housing: High-Temp Plastic, UL94-V
Color: Nature (Ivory) (LCP)
2. Locker: High-Temp Plastic, UL94-V
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
4. Temperature Rating: $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$
5. Dielectric Withstanding Voltage: 500V AC/Min

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZA2GC-xx-LF
SERIES T LEAD FREE
180°SMT 04~40WAY
ZIF MYLAR
GOLD
DOUBLE PIN
SINGLE CONTACT

DESCRIPTION: 1.0PH 5.6H 抽屜立貼單接平腳位