

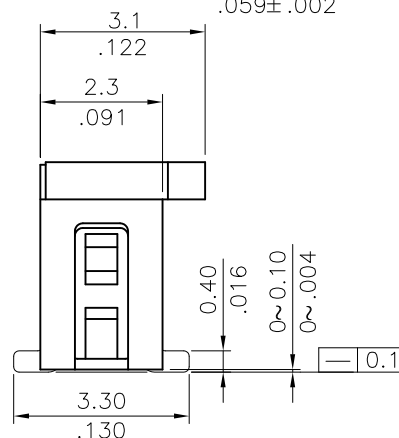


- * Body : High temperature plastic UL 94V-0,
Color Nature(Halogen-Free)
- * Slider : High temperature plastic UL 94V-0, Color Black
(Halogen-Free)
- * Contact : Phosphor Bronze, With Matte Tin plated
- * Fixed tab : Brass, With Matte Tin plated
- * For Lead Free IR Reflow Process

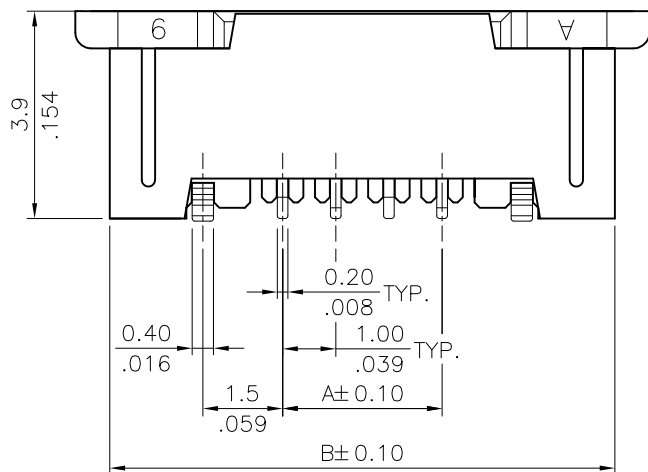

A = 1.0 x No. of Spaces .031
B = A + 6.5
C = A + 2.2
D = A + 7.8
* Available in 4 through 24 circuits

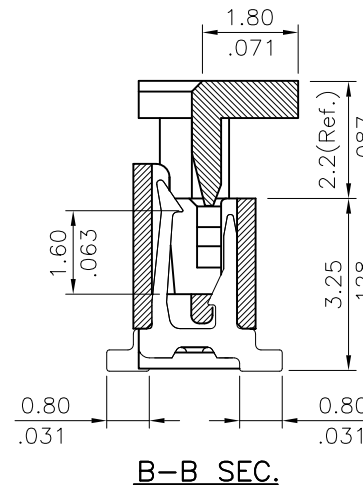

Accommodated FFC/FPC

TOLERANCES ARE

煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PROJECTION 

X, ±
 .X ± 0.15
 .XX ± 0.10
 .XXX ± 0.05
 ANG ±

照片框


ORDER INFORMATION

FPA-VZAL39R-xx-LF

SERIES LEAD FREE
04~30WAY

180°SMT
ZIF
REEL
HIGH 3.9mm
L TYPE FOOT POSITION
SINGLE CONTACT



DESCRIPTION: 1.0mm(.039") ZIF FFC/FPC VERTICAL TYPE SURFACE MOUNT CONNECTOR

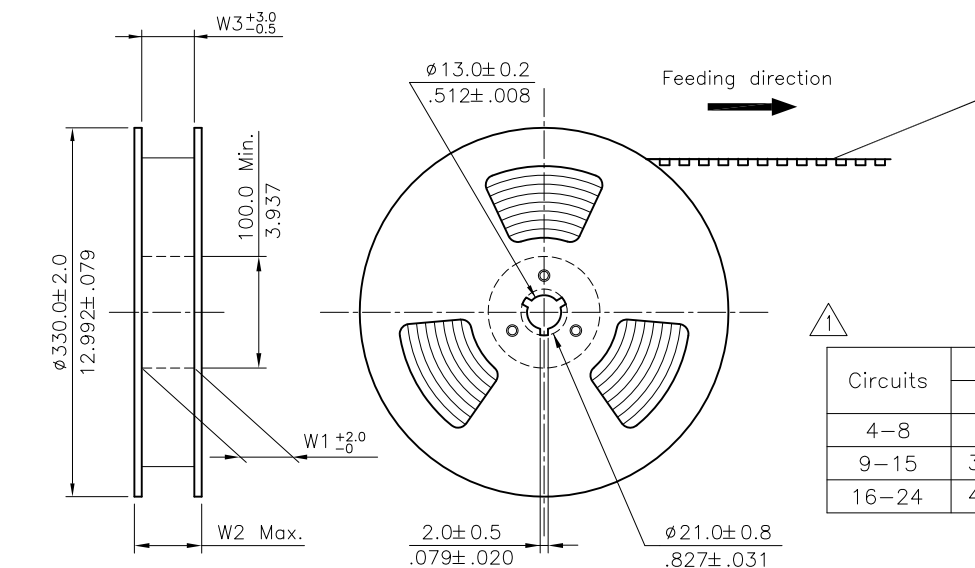


NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 1000 PCS/Reel

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4-8	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
9-15	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
16-24	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5

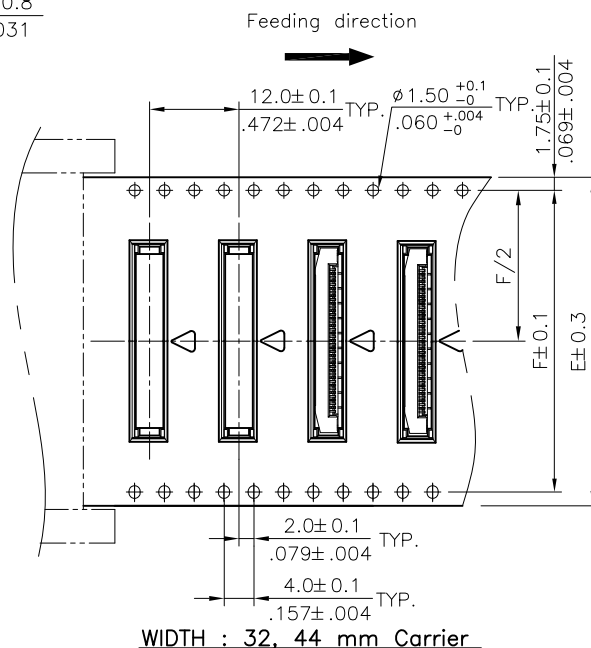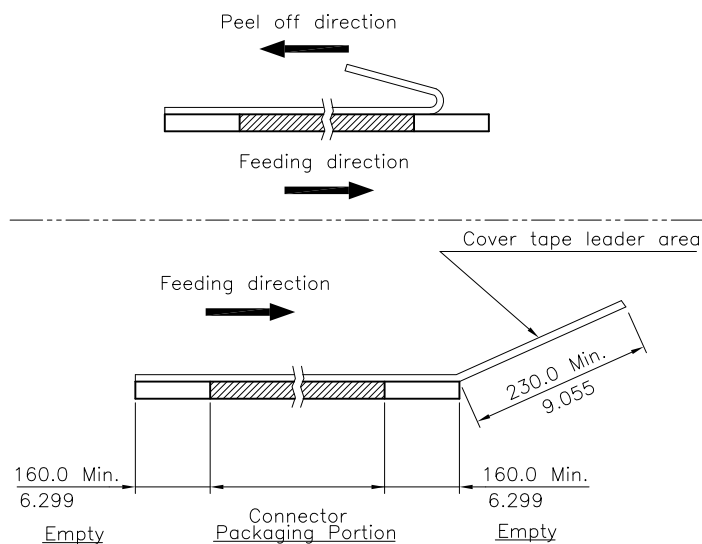

WIDTH : 32.44 mm Carrier

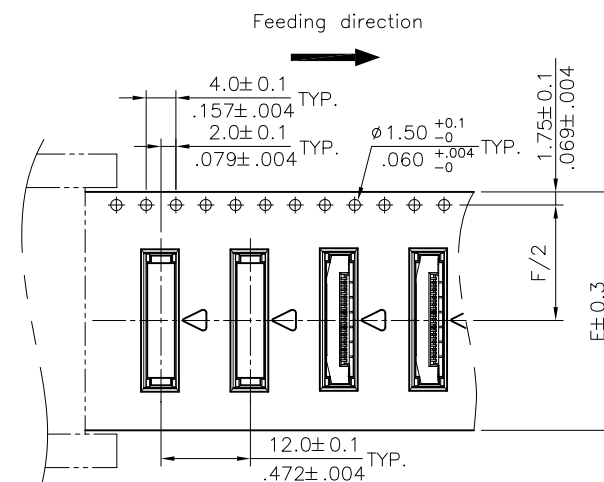

WIDTH : 24 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

FPA-VZAL39R-xx-LF
SERIES
180°SMT
ZIF
LEAD FREE
04~30WAY
REEL
HIGH 3.9mm
L TYPE FOOT POSITION
SINGLE CONTACT

DESCRIPTION: 1.0mm(.039") ZIF FFC/FPC VERTICAL TYPE SURFACE MOUNT CONNECTOR