

NOTE:

1.MATERIAL:





HOUSING:LCP
SLIDER:LCP
CONTACTS:PHOSPHOR BRONZE
SOLDER PAD:BRASS

2.PLATING:


CONTACTS:SEE ORDERING INFORMATION
SOLDER PAD:TIN OVER NICKEL(LEAD FREE)

3.RATING:

OPERATING VOLTAGE:50V
CURRENT RATING:0.5A
OPERATING TEMPERATURE:-55°C~+85°C

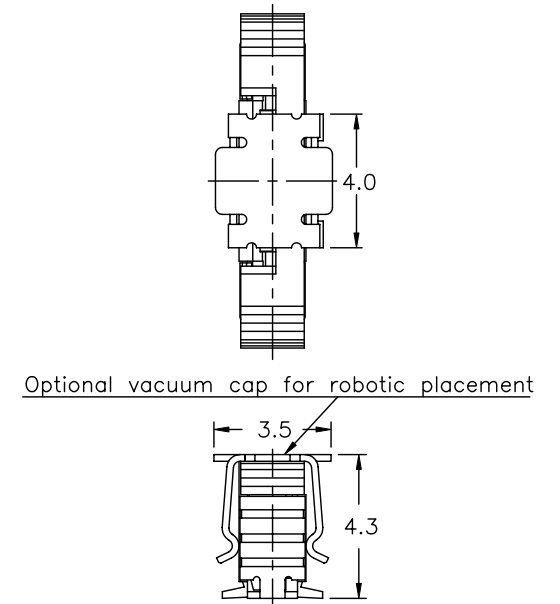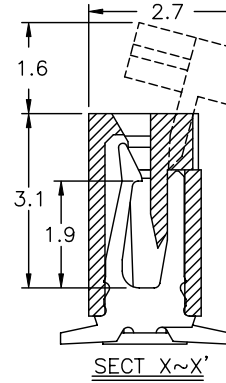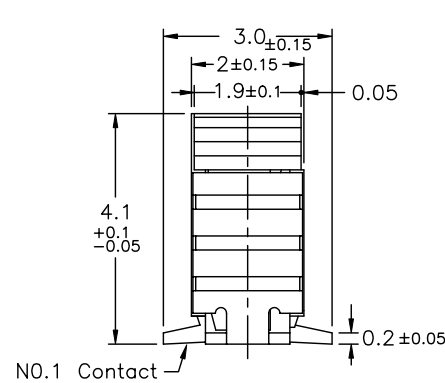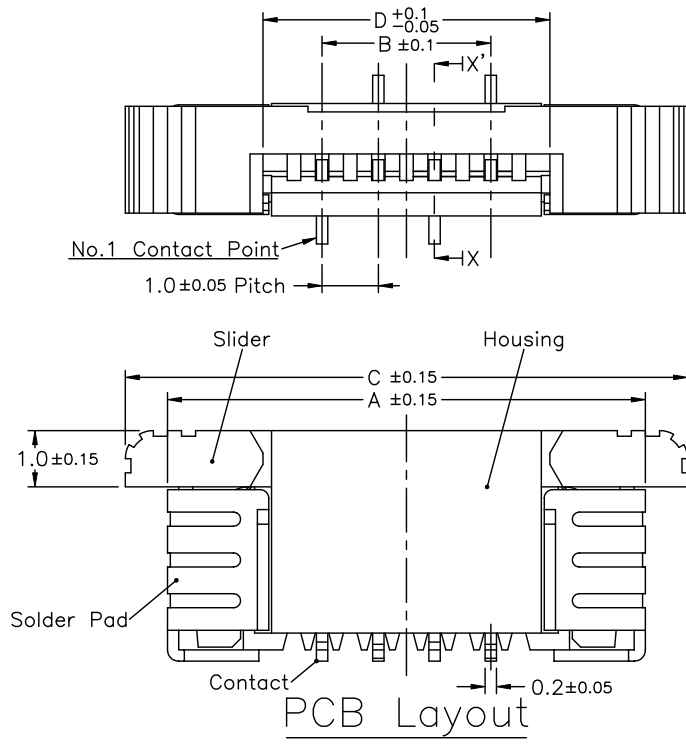

Applicable FPC

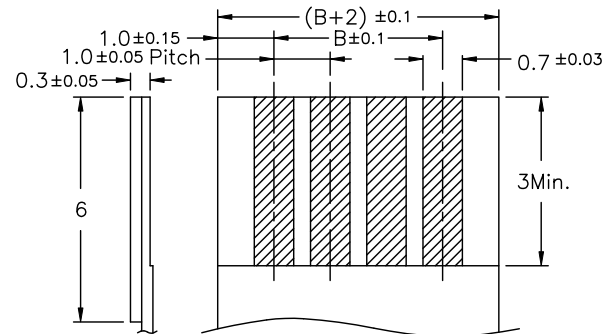

No. of Contacts	DIM. A	DIM. B	DIM. C	DIM. D
4	8.5	3	10	5.1
5	9.5	4	11	6.1
6	10.5	5	12	7.1
7	11.5	6	13	8.1
8	12.5	7	14	9.1
9	13.5	8	15	10.1
10	14.5	9	16	11.1
11	15.5	10	17	12.1
12	16.5	11	18	13.1
13	17.5	12	19	14.1
14	18.5	13	20	15.1
15	19.5	14	21	16.1
16	20.5	15	22	17.1
17	21.5	16	23	18.1
18	22.5	17	24	19.1
19	23.5	18	25	20.1
20	24.5	19	26	21.1
21	25.5	20	27	22.1
22	26.5	21	28	23.1
23	27.5	22	29	24.1
24	28.5	23	30	25.1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

FPA-VZAL41CR-xx-LF

SERIES 180°SMT ZIF SINGLE CONTACT




LEAD FREE 04~24WAY

REEL CAP HIGH 4.1mm


L TYPE FOOT POSITION

DESCRIPTION:



EMBOSSED TAPE PACKING

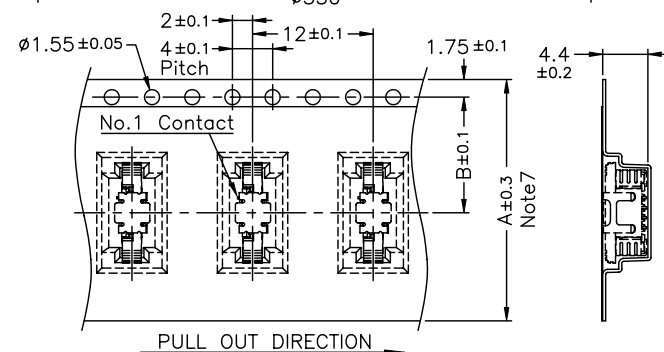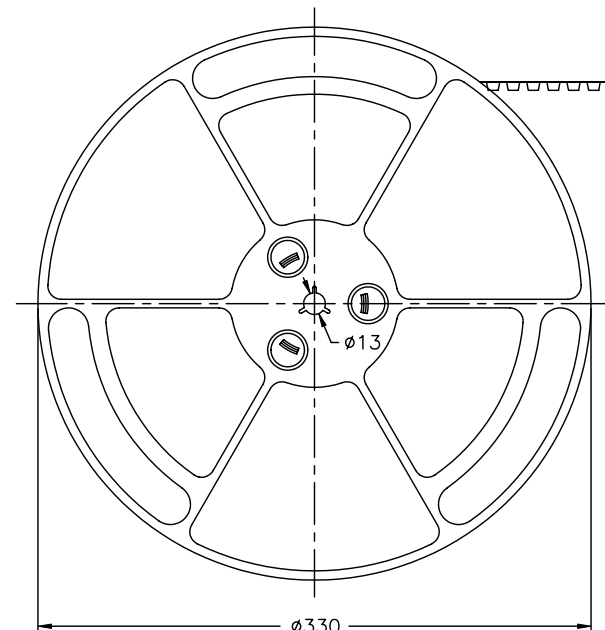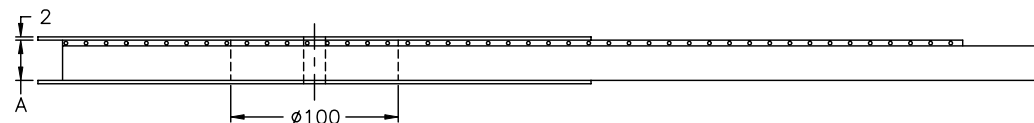

PULL OUT DIRECTION



Optional vacuum cap for robotic placement

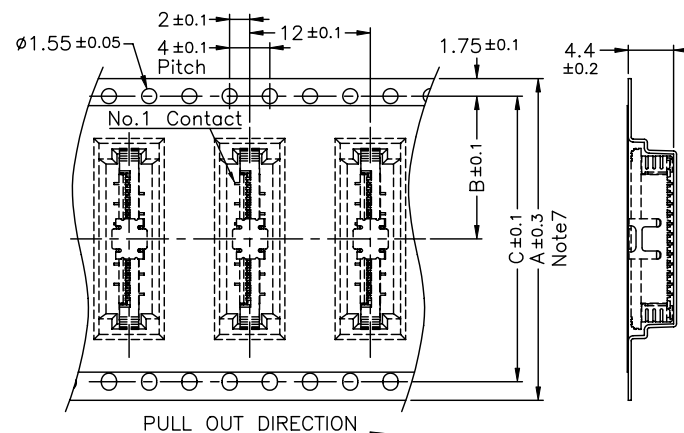

PULL OUT DIRECTION

Note:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
- 2.Carrier camber is within 1 mm in 100mm.
- 3.Material : Black Conductive Polystyrene Alloy
100% recyclable.
- 4.All dimensions meet EIA-481-B requirements.
- 5.Thickness : 0.3 ± 0.05 mm
- 6.Component load per 13" reel :1000 pcs.
- 7.For tape width (dimension A) 24mm a pilot hole is provided on one side.
For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

No.of Contacts	DIM. A Note7	DIM. B	DIM. C
4	24	11.5	—
11			
12	32	14.2	28.4
16			
17	44	20.2	40.4
24			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAL41CR-xx-LF

SERIES

180°SMT

SINGLE CONTACT

ZIF

CAP

HIGH 4.1mm


L TYPE FOOT POSITION

LEAD FREE

04~24WAY

REEL

DESCRIPTION:

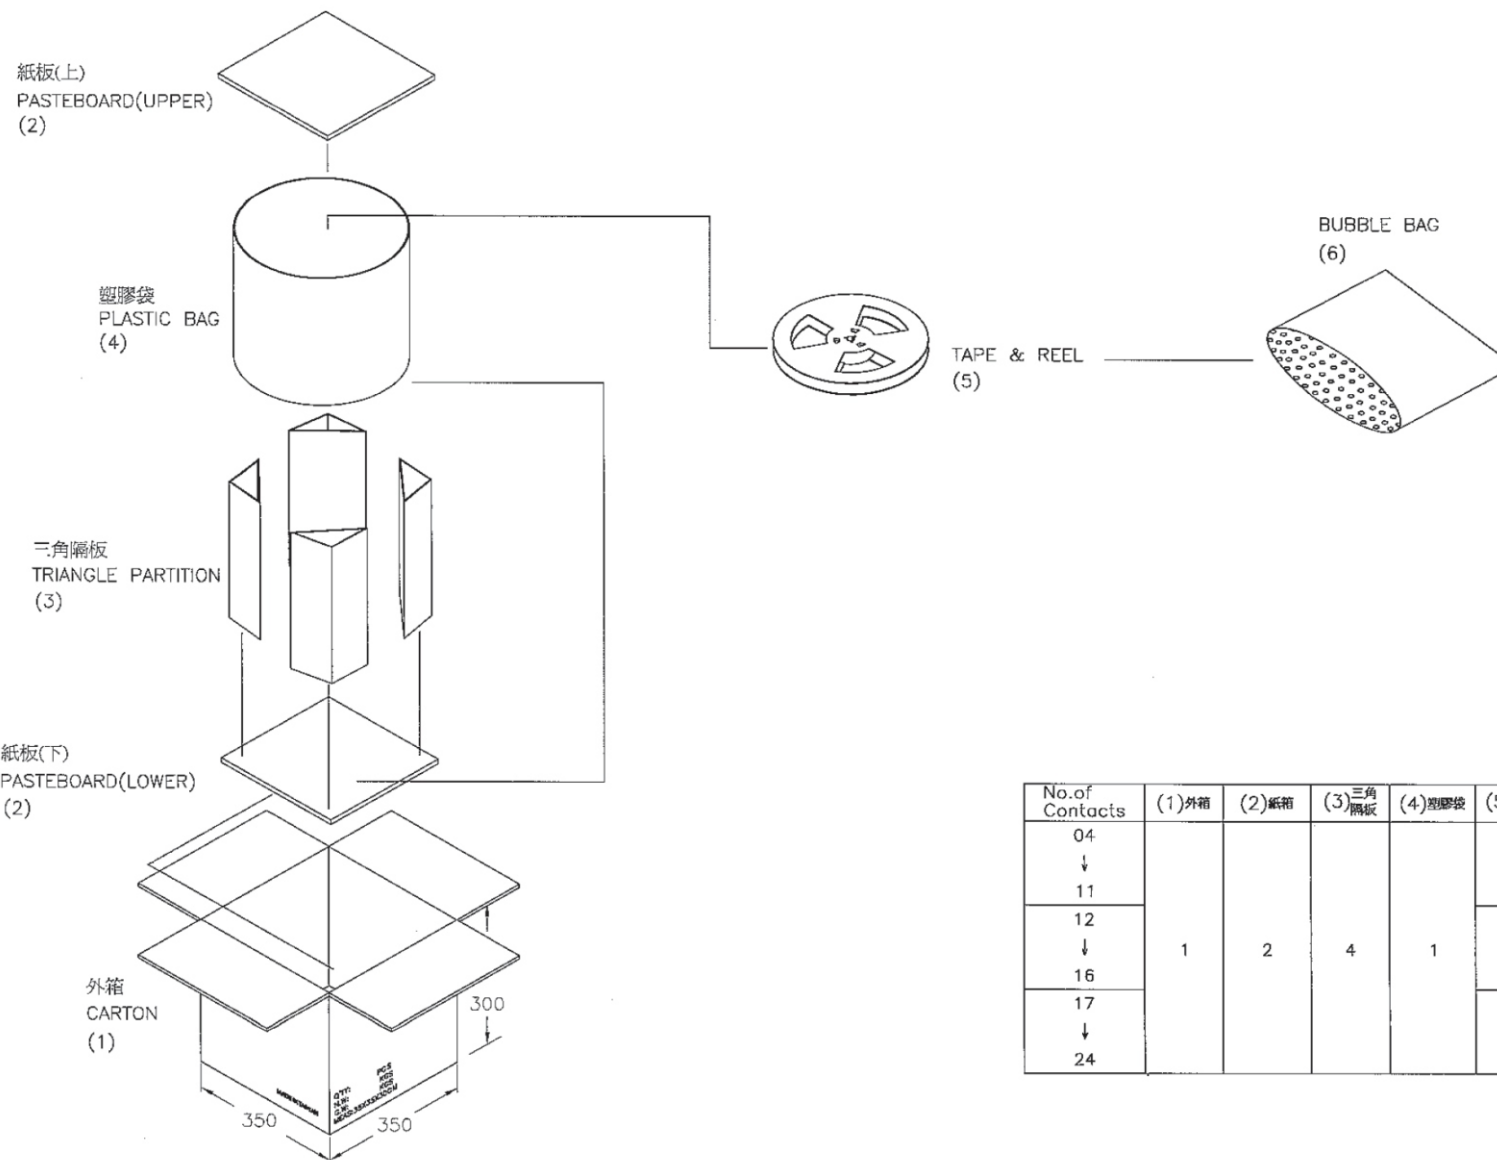

No. of Contacts	(1)外箱	(2)紙箱	(3)三角隔板	(4)塑膠袋	(5)塑膠袋	(6)氣泡袋
04 ↓ 11	1	2	4	1	7	7
12 ↓ 16					6	6
17 ↓ 24					5	5

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAL41CR-xx-LF

SERIES LEAD FREE

180°SMT 04~24WAY

SINGLE CONTACT ZIF REEL CAP HIGH 4.1mm L TYPE FOOT POSITION

DESCRIPTION: