
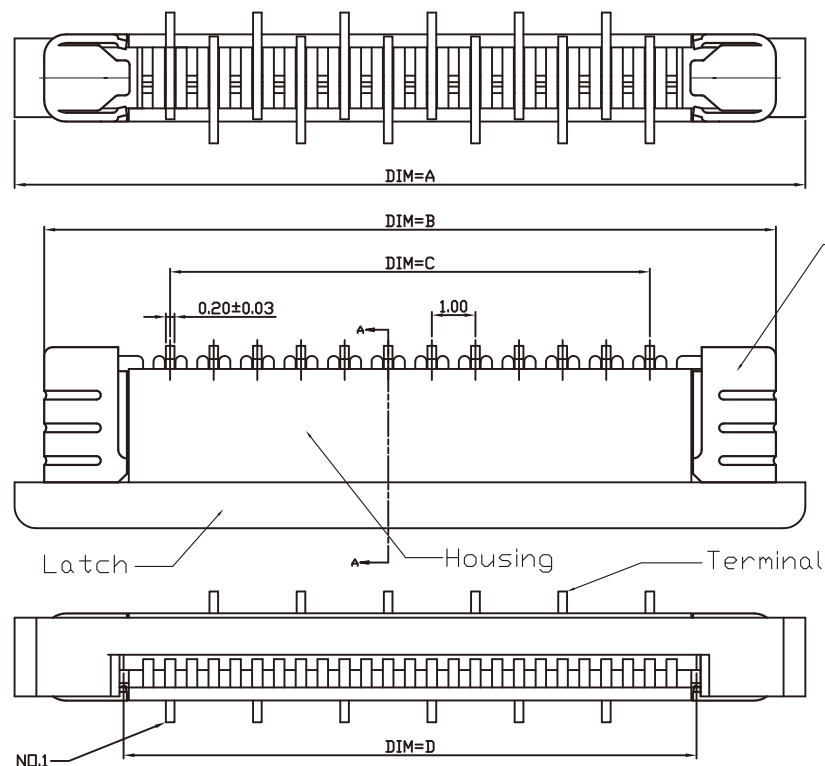



SECTION A-A

Material:

- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
- 1.2 Latch: thermoplastic high temp. UL94V-0; Color: Black.
- 1.3 Terminal: Copper Alloy.
- 1.4 Fitting Nail: Copper Alloy.

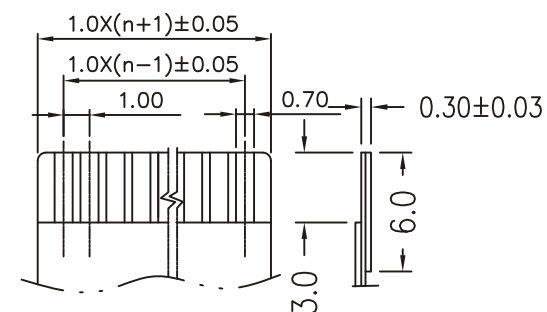

RECOMMENDED FFC/FPC DIM.

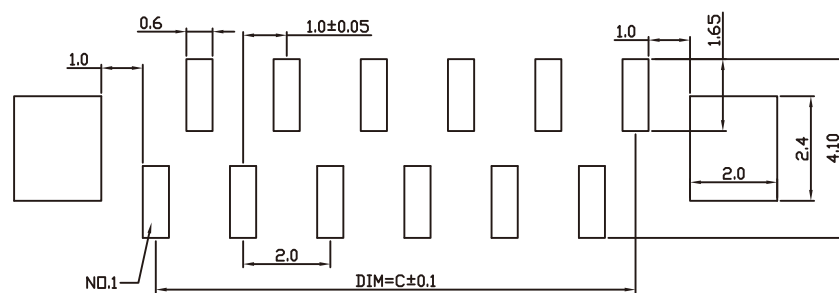

PCB LAYOUT

| PIN NO. | DIM. A | DIM. B | DIM. C | DIM. D |
|---------|--------|--------|--------|--------|
| N=4~16  | N+6.1  | N+5.0  | N-1.0  | N+1.1  |

照片框

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.20  
.XX ± 0.15  
.XXX ± 0.10  
ANG ±

PPOJECTION

ORDER INFORMATION

FPA-VZAL45C-xx-LF

SERIES

180°SMT

ZIF

MYLAR

HIGH 4.5mm

L TYPE FOOT POSITION

SINGLE CONTACT

LEADFREE

04~16WAY

DESCRIPTION: 1.0mm ZIF FPC CONNECTOR SMT VERTICAL TYPE