

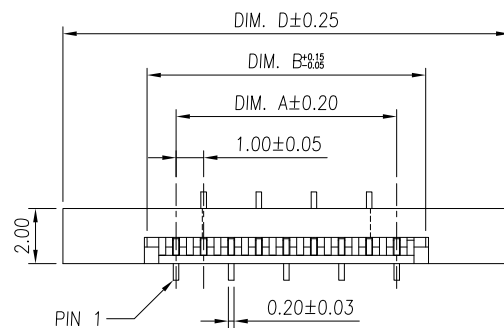
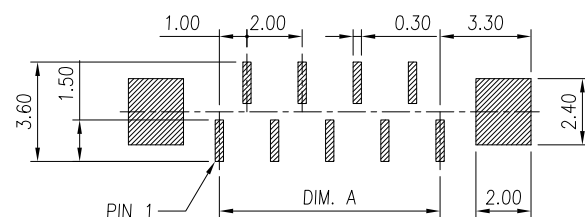



SECTION A-A

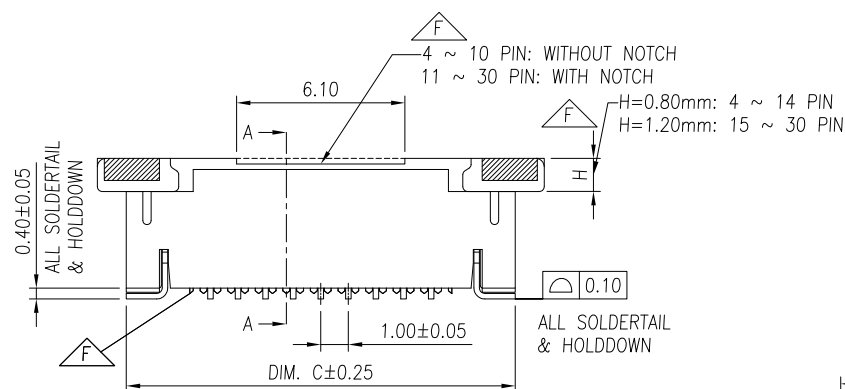

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

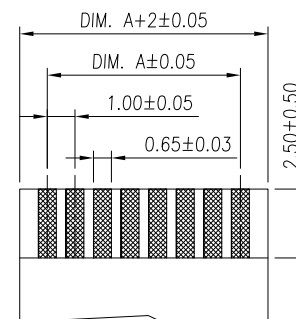

FFC/FPC DIMENSION
THICKNESS 0.30 ± 0.03 mm

SPEC :

1. Housing: Hight-Temp Plastic, UL94-V
Color: Nature(Lvory)(PA46)
2. Locker: Hight-Temp Plastic, UL94-V
Color: Black(9T)
3. Contact: Phosphor Bronze(C5191)
4. Solder Tab: BRASS(C2680)
5. Operating Voltage (Max): 50V AC
6. Current Rating (Max): 0.5A DC
7. Operating Temperature Range : $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm$

照片框


ORDER INFORMATION

FPA-VZAL47-xx-LF

SERIES
180°SMT
ZIF
LEAD FREE
04~14WAY
HIGH 4.7mm
L TYPE FOOT POSITION
SINGLE CONTACT

DESCRIPTION: 1.0PH 4.7H 抽屜立貼單接正腳位

DIMENSION TABLE



Pos.	Dimension				
	A	B	C	D	E
4	3.00	5.10	9.10	11.20	4.70
5	4.00	6.10	10.10	12.20	4.70
6	5.00	7.10	11.10	13.20	4.70
7	6.00	8.10	12.10	14.20	4.70
8	7.00	9.10	13.10	15.20	4.70
9	8.00	10.10	14.10	16.20	4.70
10	9.00	11.10	15.10	17.20	4.70
11	10.00	12.10	16.10	18.20	4.70
12	11.00	13.10	17.10	19.20	4.70
13	12.00	14.10	18.10	20.20	4.70
14	13.00	15.10	19.10	21.20	4.70

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAL47-xx-LF

SERIES

1

2

3

4

5

6

7

8

9

10

11

12

13

14

LEAD FREE

04~14WAY

HIGH 4.7mm

L TYPE FOOT POSITION

SINGLE CONTACT

180°SMT

ZIF

DESCRIPTION: 1.0PH 4.7H 抽屜立貼單接正腳位