
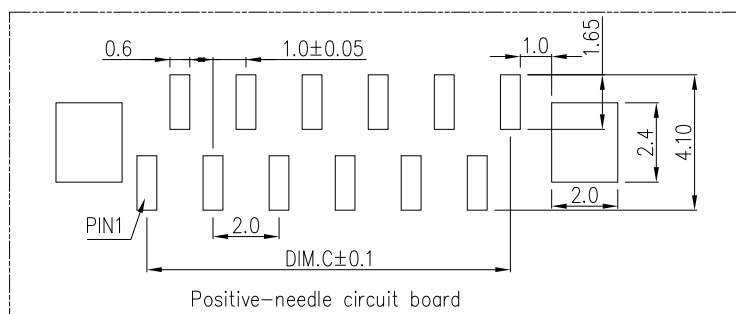
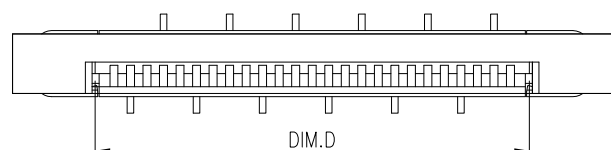
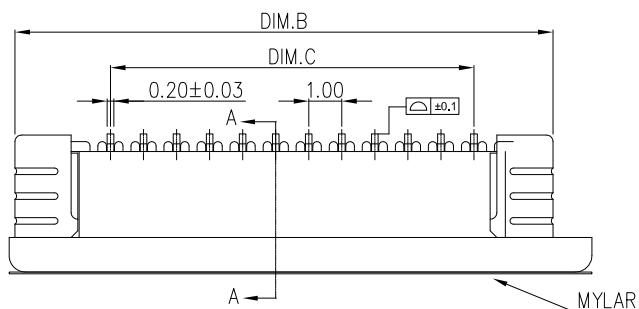
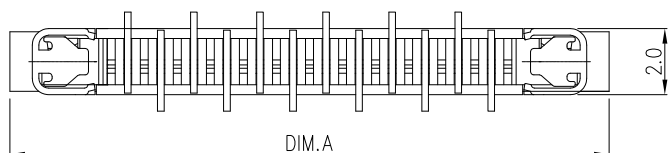


SECTION A-A



SPEC :

1. Housing: High-Temp Plastic, UL94-V
Color: Nature (Lvory) (LCP)
2. Locker: High-Temp Plastic, UL94-V
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
4. Solder Tab: BRASS (C2680)
5. Operating Voltage (Max): 50V AC
6. Current Rating (Max): 0.5A DC
7. Operating Temperature Range : -45°C ~ +85°C

● : 表示現有可提供PIN數

	PIN	DIM.A	DIM.B	DIM.C	DIM.D
	18	24.10	23.10	17.00	19.10
	19	25.10	24.10	18.00	20.10
	20	26.10	25.10	19.00	21.10
	21	27.10	26.10	20.00	22.10
	22	28.10	27.10	21.00	23.10
	23	29.10	28.10	22.00	24.10
	24	30.10	29.10	23.00	25.10
	25	31.10	30.10	24.00	26.10
	26	32.10	31.10	25.00	27.10
	27	33.10	32.10	26.00	28.10
	28	34.10	33.10	27.00	29.10
	29	35.10	34.10	28.00	30.10
	30	36.10	35.10	29.00	31.10

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

FPA-VZAL49-xx-LF

SERIES

180°SMT

LEAD FREE

18~30WAY

HIGH 4.9mm

L TYPE FOOT POSITION

SINGLE CONTACT

ZIF

DESCRIPTION: 1.0PH 4.9H 抽屜立貼單接正腳位